


EX AHU-JA-2 VAV TERMINAL SCHEDULE

TAG	MANUFACTURER	MODEL	INLET DIA.	CFM SETTING		HW REHEAT COIL DATA				CONTROL SEQUENCE		REMARKS
				MAX CFM	MIN CFM	MBH	GPM	WPD	EWT	OPEN/ CLOSED	OPEN/CLOSED/ OPEN	
2A	JOHNSON CONTROLS	TSS-WC-16	16'	2,255	565	73.4	7.3	5'	160	-	X	-
2B	JOHNSON CONTROLS	TSS-WC-14	14'	1,810	455	58.9	5.9	5'	160	-	X	-




GRILLE, REGISTER & DIFFUSER SCHEDULE

TAG	MANUFACTURER	MODEL NO.	DESCRIPTION	AIR PATTERN	MOUNTING	SIZE	TYPE OF CONTROL	REMARKS
A4	NAILOR	6500-O	SUPPLY CEILING DIFFUSER	4-WAY	2' X 2' LAY-IN PANEL	SEE PLANS	O.B.D.	-
B3	NAILOR	6500-O	SUPPLY CEILING DIFFUSER	3-WAY	SURFACE MOUNTED	SEE PLANS	O.B.D.	-
R1	NAILOR	6145H-O	RETURN/EXHAUST REGISTER	LOUVERED GRILLE	LAY-IN PANEL	SEE PLANS	O.B.D.	-

* ALL DIFFUSERS AND REGISTER SHALL HAVE A WHITE FINISH UNLESS OTHERWISE NOTED

SYMBOLS/ABBREVIATIONS


SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	ABBREVIATIONS	DESCRIPTION
	SQUARE TO ROUND TRANSITION		SEE SCHEDULES	AH	AIR HANDLING UNIT
	EXISTING DUCTWORK		SHEET NOTE	CFM	CUBIC FEET PER MINUTE
	NEW DUCTWORK		VAV W/ HOT WATER REHEAT COIL	CTE	CONNECT TO EXISTING
	DUCTWORK TO BE REMOVED		THERMOSTAT - ADJUSTABLE	DN	DOWN
	DUCT TRANSITION		HWS HOT WATER SUPPLY PIPING	EWT	ENTERING WATER TEMPERATURE
	CAP EXISTING DUCTWORK AS REQUIRED		HWR HOT WATER RETURN PIPING	EX	EXISTING
	NEW DUCTWORK TO TIE INTO EXISTING DUCTWORK		PIPING TO BE REMOVED	GPM	GALLONS PER MINUTE
	SUPPLY AIR DUCT DOWN		EXISTING PIPING	HWS	HOT WATER SUPPLY
	SUPPLY AIR DUCT UP		PIPE TURNED UP	HWR	HOT WATER RETURN
	RETURN OR EXHAUST DUCT DOWN		PIPE TURNED DOWN	HW	HOT WATER
	RETURN OR EXHAUST DUCT UP		UNION	LWT	LEAVING WATER TEMPERATURE
	FLEXIBLE DUCTWORK		CIRCUIT SETTER	MBH	1,000 BTU/HOUR
	AUTOMATIC (MOTORIZED) DAMPER		SHUT-OFF VALVE	MV	MANUAL AIR VENT
	RETURN OR EXHAUST REGISTER		STRAINER	NK	NECK
	SUPPLY AIR DIFFUSER		2-WAY AUTOMATIC VALVE	NTS	NOT TO SCALE
			MANUAL AIR VENT	OBD	OPPOSED BLADE DAMPER
				R/A	RETURN AIR
				S/A	SUPPLY AIR
				TYP	TYPICAL
				UD	UNDERCUT DOOR
				VAV	VARIABLE AIR VOLUME
				WPD	WATER PRESSURE DROP

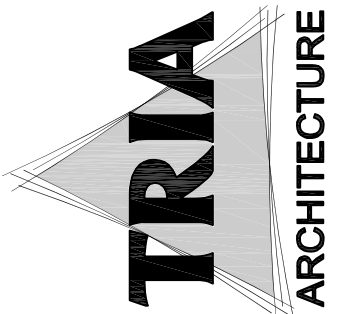

STRUCTURAL CONSULTANT:
Larson Engineering, Inc.
1845 BIRD STREET, SUITE 100
WHEELING, ILLINOIS 60090-5000
(P) 630.325.0840
(F) 630.325.0841
MEP CONSULTANT:
Millies Engineering Group
8711 W. MUMFORD DR. #A
MUNSTER, INDIANA 46321
(P) 733.831.6400
(F) 733.831.6033

DUNELAND SCHOOL CORPORATION
2015
JACKSON ELEMENTARY SCHOOL RENOVATIONS
811 N. 400 E., VALPARAISO, IN 46383

PROJECT NUMBER: E-008	REVISION:
PROJECT MANAGER: SCS	1
DRAWN BY:	2
USED FOR BIDDING: 04/02/05	3
SCHEDULES AND ABBREVIATIONS	

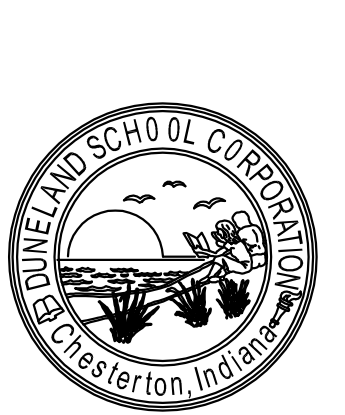

M301

