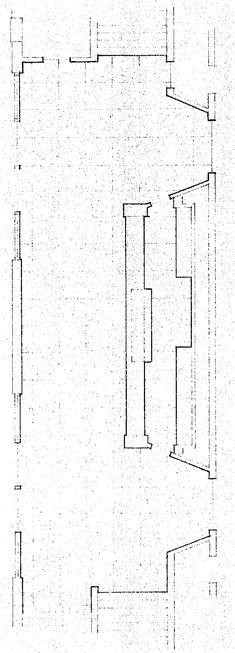

REAR LOBBY SOUTH

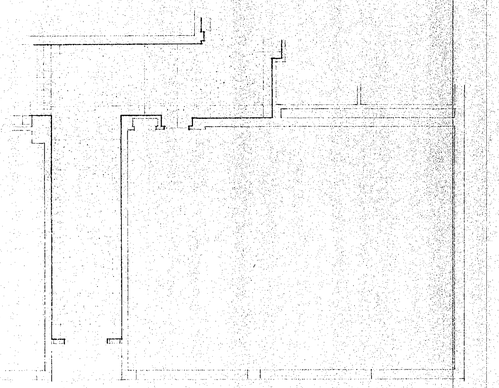

EAST ENTRANCE CORRIDOR

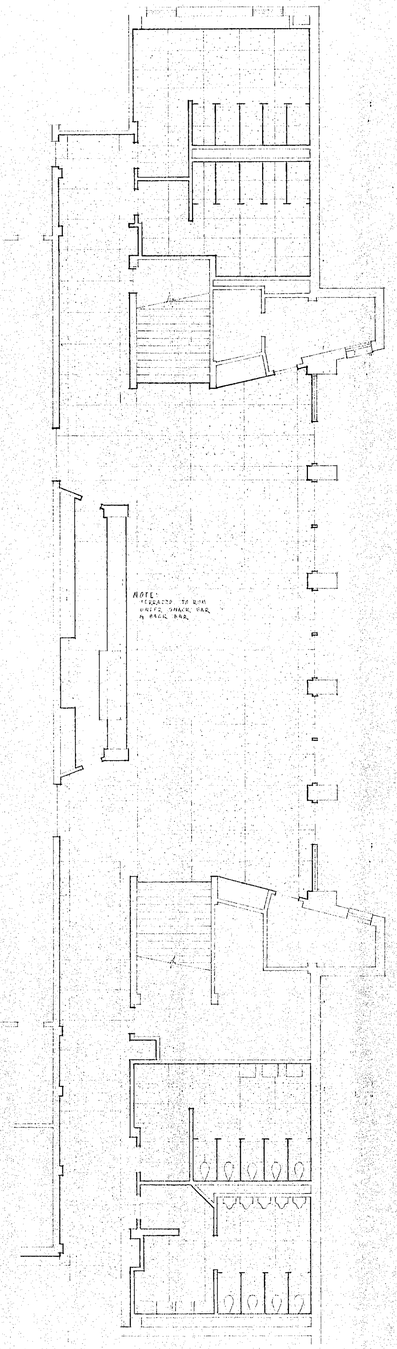

FRONT LOBBY NORTH

PLANS OF ALTERNATE TERRAZZO FLOORS

SCALE 1/8" = 1'-0"

ROOM FINISH SCHEDULE

MARK	NAME	FLOOR: CONCRETE STEEL TROWEL	FLOOR: ASPHALT TILE	FLOOR: ALTERNATE - TERRAZZO	FLOOR: WOOD - PERMA-CUSHION SYSTEM	FLOOR: GROUTCH RUBBER TREADS	FLOOR: 4" RUBBER COVE BASE	FINISH FLOOR ELEVATION	WAINSCOT: CEMENT ENAMEL	WALL: CONCRETE BLOCK - PAINTED	WALL: CEMENT ENAMEL	WALL: ACOUSTIC TILE	CEILING: * ACOUSTIC TILE	CEILING: CONCRETE PAINTED	CEILING: STEEL JOISTS - TEGTUM	FINISH CEILING HEIGHT	REMARKS
																	* ACOUSTIC TILE TO BE SUSPENDED BY SECURITE 1½ SUSPENSION SYSTEM. C.E. = CEMENT ENAMEL
	FIRST FLOOR																
100	CLASSROOM							103.5								9'-0"	
101	CLASSROOM															"	
102	CLASSROOM																
103	BAND ROOM																
103A	UNIFORM STORAGE																
103B	INSTRUMENT STORAGE																
103C	PRACTICE ROOM																
103D	PRACTICE ROOM																
103E	PRACTICE ROOM																
103F	OFFICE															9'-6"	
104	BOILER ROOM															12'-11"	
105	CORRIDOR															8'-7"	
106	CORRIDOR															8'-7"	
107	STORAGE															7'-1"	
108	LOBBY															8'-7"	
109	SNACK BAR							103.5								8'-7"	BACK WALL PAINT FULL HEIGHT
	STAIRWAY #4																
110	TICKET OFFICE							103.5									
111	EQUIPMENT ROOM															7'-1"	
112	BOYS' LOCKER ROOM																
113	BOYS' SHOWER ROOM																
114	DRYING																
115	TEAM ROOM																
116	TOILET ROOM																
117	TOILET ROOM																
118	EQUIPMENT																
119	EQUIPMENT STORAGE																
120	THERAPY ROOM																
121	COACH'S TOILET ROOM																WALLS NOT SHOWN. C.E. FULL HEIGHT
122	COACH'S OFFICE																
123	LOBBY OFFICE															9'-6"	
124	MEN'S TOILET ROOM															8'-7"	
125	WOMEN'S TOILET ROOM															8'-7"	
126	CORRIDOR															9'-2"	
127	TICKET OFFICE							103.5									
	STAIRWAY #1																
128	SNACK BAR							103.5								7'-7"	BACK WALL PAINT FULL HEIGHT
129	LOBBY															7'-7"	
130	TICKET OFFICE															7'-7"	
131	STORAGE ROOM							103.5								8'-7"	
	STAIRWAY #2																
132	CORRIDOR							103.5								8'-7"	
133	WOMEN'S TOILET ROOM															8'-5"	
134	MEN'S TOILET ROOM															8'-5"	
135	GYM TEACHER'S OFFICE															7'-1"	
136	GYM TEACHER'S TOILET ROOM																WALLS IN SHOWER C.E. FULL HEIGHT
137	EQUIPMENT ROOM																
138	GIRLS' LOCKER ROOM																TOILET CLOSET WALLS TO BE PAINTED
139	DRYING ROOM & TOWEL CLOSET																GIRLS INDICATORS SHOWER C.E. FULL HT. ON WALLS
140	GIRLS' SHOWER ROOM																
141	CORRECTIVE ROOM															9'-6"	
142	TOILET ROOM							103.5									
	STAIRWAY #3																
143	GYMNASIUM							103.5									
	JANITOR'S CLOSET & STORAGE ROOM							103.5									
	SECOND FLOOR																
200	MEN'S TOILET ROOM							112.0								9'-6"	
201	WOMEN'S TOILET ROOM															9'-6"	
202	AMPHITHEATER ROOM															10'-8"	
203	BALCONY																
204	DRIVERS EDUCATION CLASSROOM															8'-10"	
205	CORRIDOR															8'-10"	
206	PRACTICE ROOM							113.0								8'-10"	
207	PRACTICE ROOM							114.85								8'-10"	
	STAIRWAY #5																
208	LOBBY ROOM							114.85									
209	OFFICE							114.85								7'-0"	
210	MEN'S TOILET ROOM							113.0								7'-6"	
211	WOMEN'S TOILET ROOM															7'-6"	
212	CORRIDOR															7'-0"	
213	BALCONY																
214	EQUIPMENT STORAGE							113.0								7'-6"	
215	CORRIDOR							114.85								7'-6"	
216	STORAGE							114.25								7'-6"	
	JANITOR'S CLOSET							113.0								7'-6"	
	THIRD FLOOR																
300	RECREATION AREA							123.65									
301	CHOIR ROOM																
302	ROBE STORAGE																
303	ROBE STORAGE																
304	WRESTLING & BOXING AREA																
305	RECREATION AREA																
306	MECHANICAL EQUIPMENT ROOM							122.75									

NOTE:
CEMENT ENAMEL WAINSCOT IN CLASSROOMS 100, 101, & 102 SHALL BE 1' WINDOW SILL HEIGHT INCLUDING SILL. ALL OTHER AREAS WHERE CEMENT ENAMEL WAINSCOT IS SHOWN SHALL BE AT NEAREST HORIZONTAL MASONRY JOINT TO A PLUS OR MINUS 5'-0".

NOTE:
APPLY HARDENER TO ALL EXPOSED CONCRETE FLOORS

GENERAL NOTE:
SEE INSTRUCTIONS TO BIDDERS FOR ALTERNATES (1) TERRAZZO FLOORS, (2) ASPHALT TILE FLOORS, (3) BAND ROOM FLOORS, AND (4) WOOD PARTITIONS.

DATE NOV. 15, 1966

CERTIFIED BY
DOUGLAS F. HALEY
REGISTERED
NO. 1009
STATE OF INDIANA
ARCHITECT

ROOM FINISH SCHEDULE

SH. A14

PHYSICAL EDUCATIONAL BUILDING
WESTCHESTER TOWNSHIP HIGH SCHOOL
CHESTERTON, INDIANA

SCHUTT-HALEY, ASSOCIATES
ARCHITECTS AND ENGINEERS
510 JEFFERSON ST. GARY, IND.