


 $\frac{3}{8}'' = 1'-0''$

KEY NOTES

- FLOOR PLAN NOTES**

1. WHERE DIFFERENT FLOOR MATERIALS MEET, THEY SHALL MEET UNDER THE CENTRELINE OF THE DOOR, UNLESS NOTED OTHERWISE.
2. WALLS THAT DO NOT LAY OUT IN PLUMB OR HALF TO NOT HAVE RECESSED LEAD PLANT & BORDERS NOT TO BE USED.
3. INTERIOR MASONRY WALLS SHALL RUN UP TO THE UNDERSIDE OF THE DECK SLAB AND FINISH AT THE PEAK FILLED WITH FIRESTOPPING AT RATED & NON-RATED WALLS SHALL ALLOW FOR DEFLECTION.
4. SEE DETAILS ON SHEET #1A FOR TYPICAL MASONRY CONTROL JOINTS AND EXPANSION JOINTS.
5. SINCE ALL MASONRY WALLS ARE INDICATED AT NORMAL DIMENSIONS,
6. CONCRETE MASONRY UNITS (CMU) CORNERS SHALL BE REINFORCED WITH STEEL BARS. BULFONE CORNER INCLUDING THOSE THAT ARE ADJACENT TO LOCKERS, USE BULFONE CORNER UP TO UNDERSIDE OF CEILING OR BULKHEAD PLANE, ABOVE THIS PLAN USE CMU W/VO BULFONE CORNER.
7. FINISH FLOOR ELEVATION INDICATED FOR THE BUILDING IS -0'-0". REFER TO THE SITE PLAN FOR CONVELOCATION TO USGS DATUM.
8. SEE SHEET #1A-26 FOR MOUNTING HEIGHTS.
9. INTERIOR AND EXTERIOR GYM WALLS ARE TO BE ROUNDED BOUNDINGS UNLESS NOTED OTHERWISE. EXTEND A MINIMUM OF 4" ABOVE THE HIGHEST CEILING.
10. ALL DIMENSIONS INDICATED ARE NOMINAL. METAL STUD WALLS ARE DIMENSIONED TO FACE OF STUDS. REFER TO WALL SCHEDULE FOR SPECIFICATIONS FOR ACTUAL DIMENSIONS, WHEN INDICATED.
11. UNLESS OTHERWISE NOTED, THE WALL LENGTH FROM THE OUTER FACE OF POOR-TITE ROUGH OPENING CHIMNEY WILL BE THE DISTANCE TO THE NEAREST INTERSECTION WITH ANOTHER WALL.
12. REFER TO SHEET #1A.3 FOR WALL TYPES.
13. GENERAL NOTE: BUILDING DIMENSIONS ARE TO CENTERLINE.
14. GENERAL NOTE: FINISH FLOOR ELEVATION = +10'-0" FOR THE FIRST FLOOR AND +14'-0" FOR THE SECOND FLOOR UNLESS OTHERWISE NOTED.

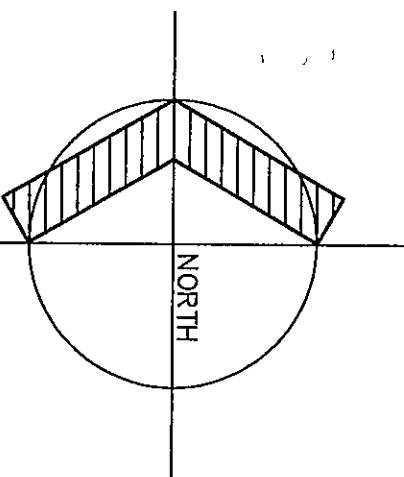