



CEILING & LIGHTING SCHEDULE
YOST ELEMENTARY SCHOOL

LOWER LEVEL

- AREA 'A'**
-Remove all existing 2 x 2 x 4 acoustical ceiling tile.
-Remove existing grid and existing surface mount 1 x 4 fluorescent light fixtures to remain typical.
-Temporary disconnect/remove existing ceiling P.A. Speakers, exit fixture and smoke detectors. Reinstall these items once new lay-in ceiling tile is installed.
-Install new 2 x 2 and 2 x 4 lay-in acoustical ceiling tile in existing grid.
- AREA 'B'**
-Remove ten (10) existing water damaged/cracked 2 x 4 lay-in acoustical ceiling tile from existing suspended acoustical ceiling in this area.
-Install ten (10) new replacement 2 x 4 lay-in acoustical ceiling tiles.
- AREA 'C'**
-Remove all existing 2 x 2 acoustical ceiling tile. Existing suspension grid and existing surface mount 1 x 4 and recessed 1 x 4 fluorescent light fixtures to remain typical.
-Temporarily disconnect/remove existing ceiling P.A. Speakers, exit fixture and smoke detectors. Reinstall these items once new lay-in ceiling tile is installed.
-Install new 2 x 2 lay-in acoustical ceiling tile in existing grid.
- UPPER LEVEL**
- AREA 'D'**
-Remove all existing 2 x 4 acoustical ceiling tile. Existing suspension grid and existing 2 x 4 lay-in fluorescent light fixtures to remain typical.
-Temporarily disconnect/remove existing ceiling P.A. Speakers, existing ceiling paddle fan and existing ceiling R. A. Grilles. Reinstall these items once new lay-in ceiling tile is installed.
-Install new 2 x 4 lay-in acoustical ceiling tile in existing grid.
- AREA 'E'** (ALT. BID CL-1)
-Existing ceiling tile on drywall ceiling (@ 10'-0" c/g. ht.) to remain.
-Disconnect/remove two (2) existing surface mount 1 x 4 fluorescent light fixtures from each (Boys & Girls) Toilet Room.
-Install new 2 x 4 suspended grid and acoustical lay-in ceiling tile approx. 5" below old ceiling.
-Install three (3) new lay-in 1 x 4 fluorescent light fixtures in each (Boys & Girls) Toilet Room.

LEGEND

- 1 NEW 1/4 2-TUBE LAY-IN FLUORESCENT LIGHT FIXTURE
- LUMINA 50W 240V 120 V
2 EXISTING 1/4 2-TUBE SURFACE MOUNTED OR LAY-IN TYPE FLUORESCENT LIGHT FIXTURE
3 EXISTING 2x4 LAY-IN TYPE FLUORESCENT LIGHT FIXTURE
4 EXISTING SURFACE MOUNTED EXIT LIGHT FIXTURE
5 EXISTING RECESSED CEILING P.A. SPEAKER
6 EXISTING SURFACE MOUNTED SMOKE DETECTOR
7 EXISTING CEILING P.A. GRILLE

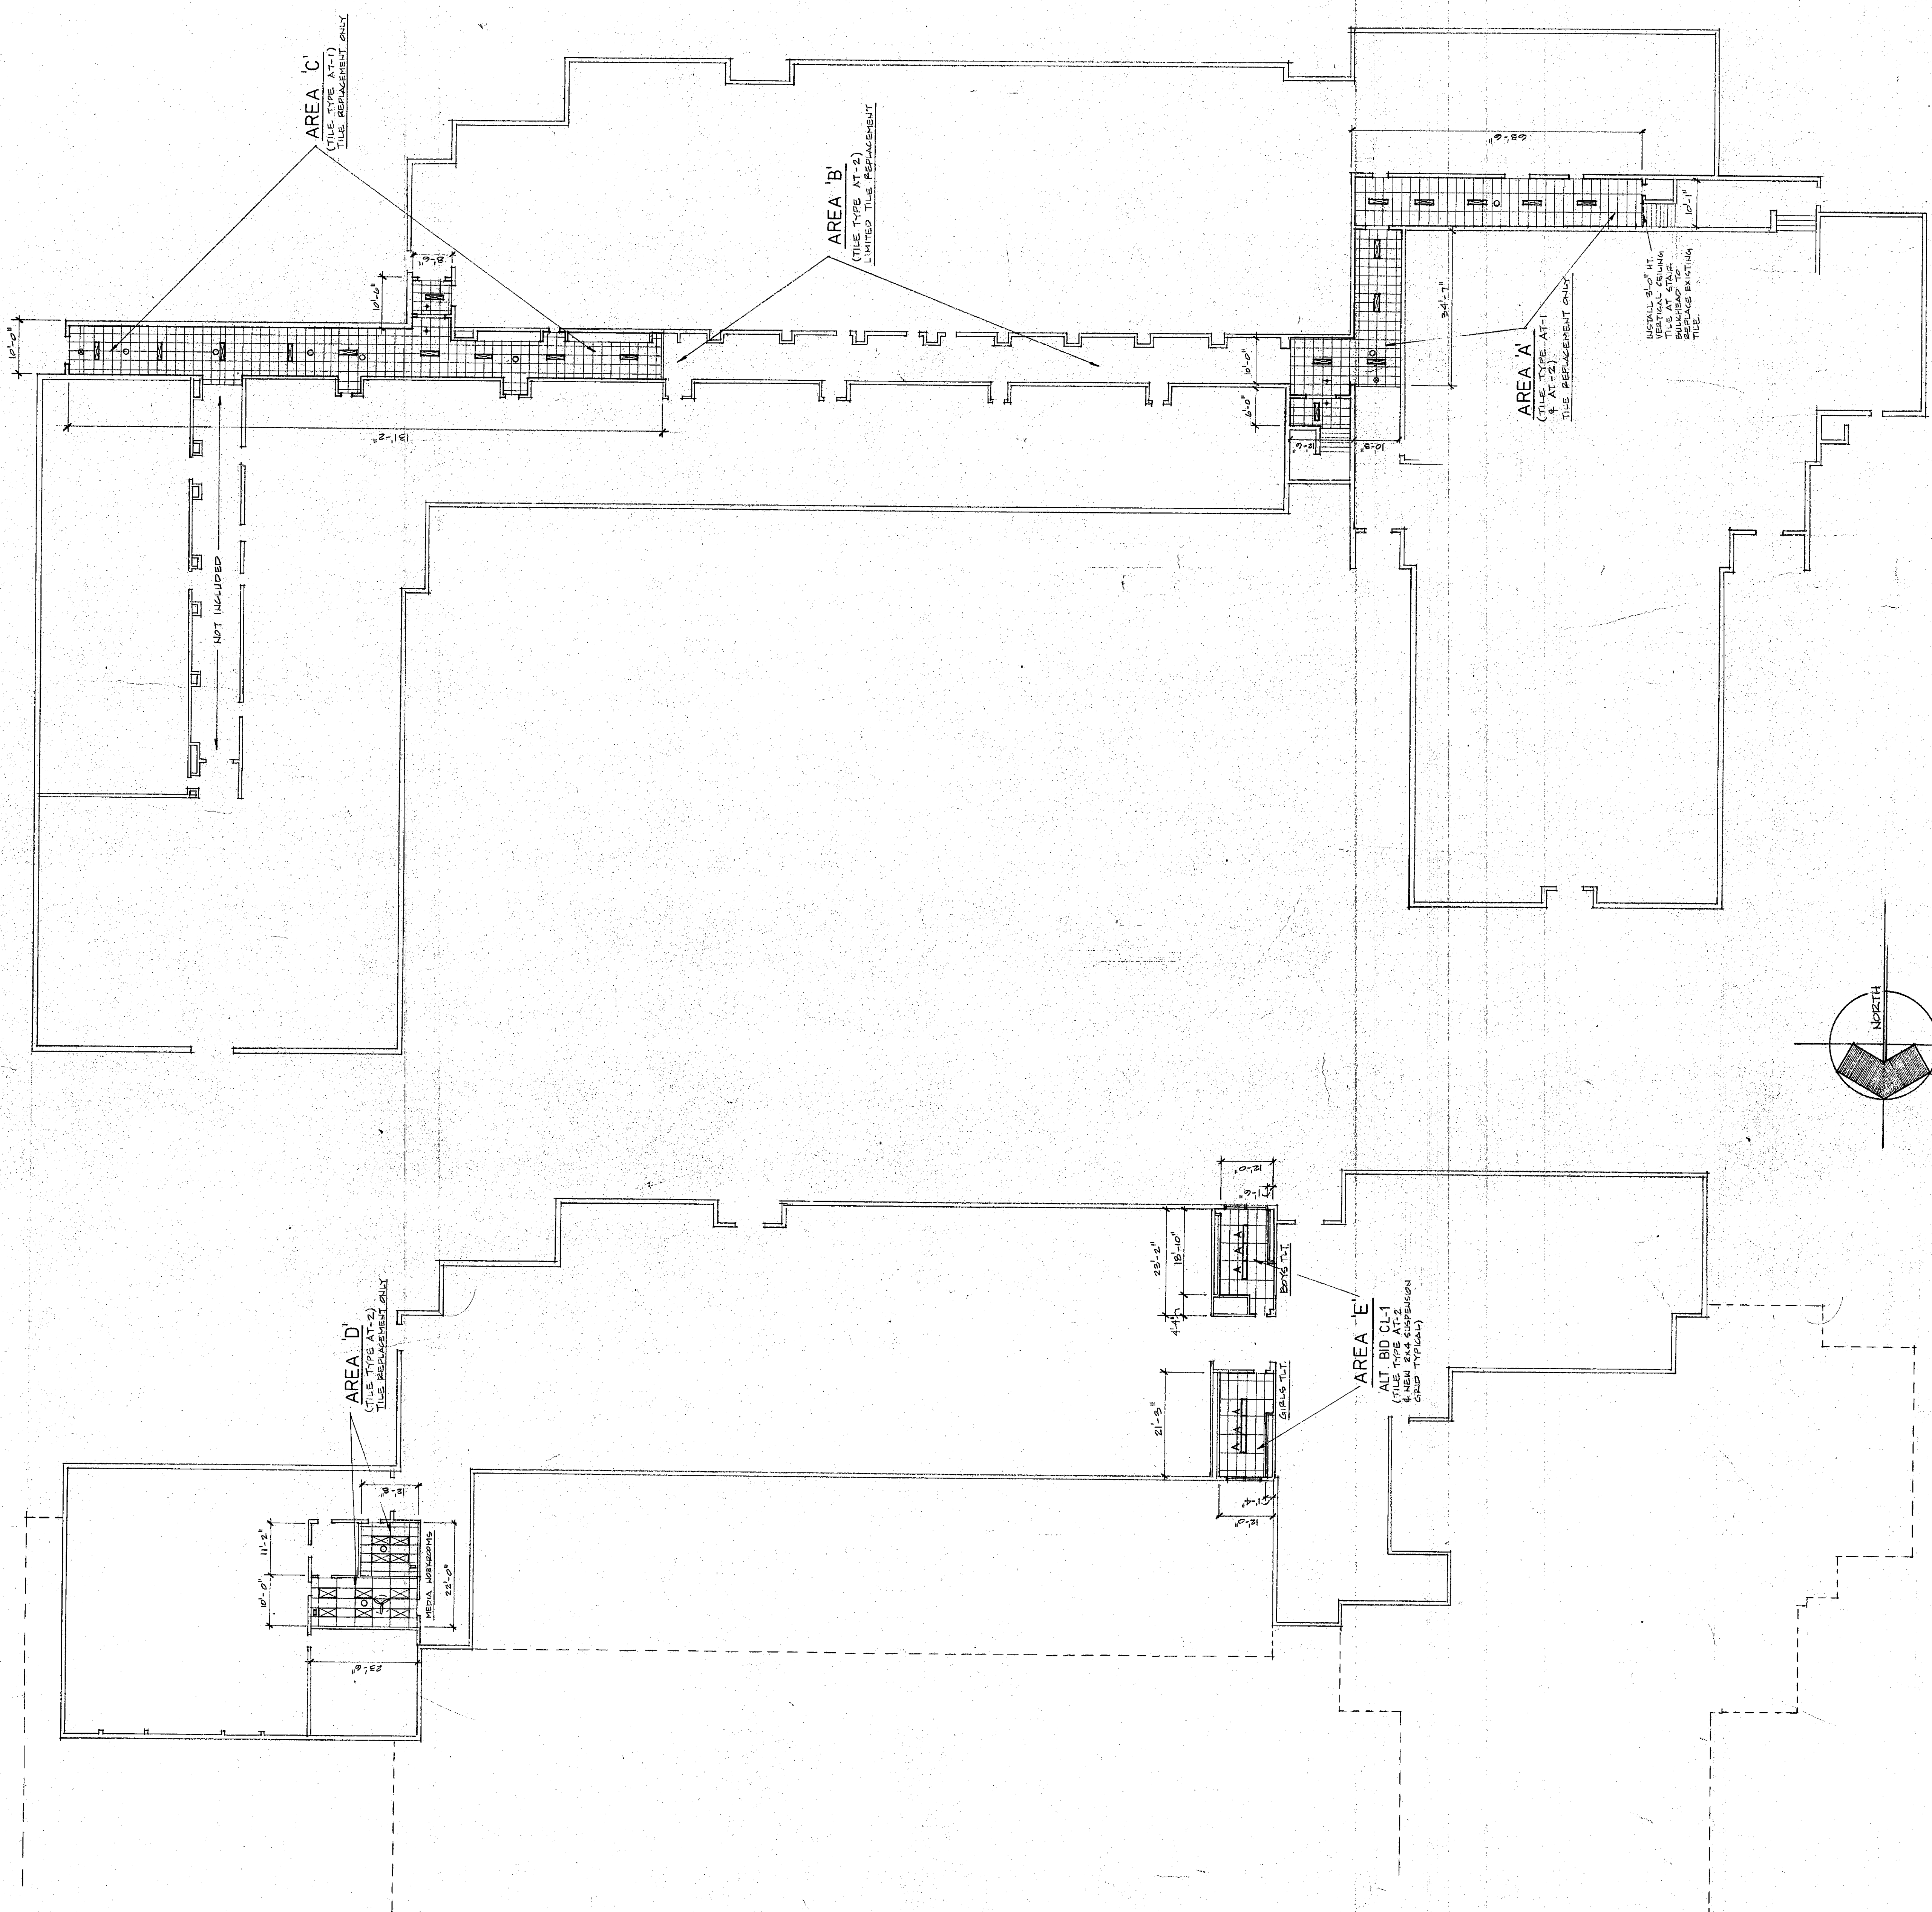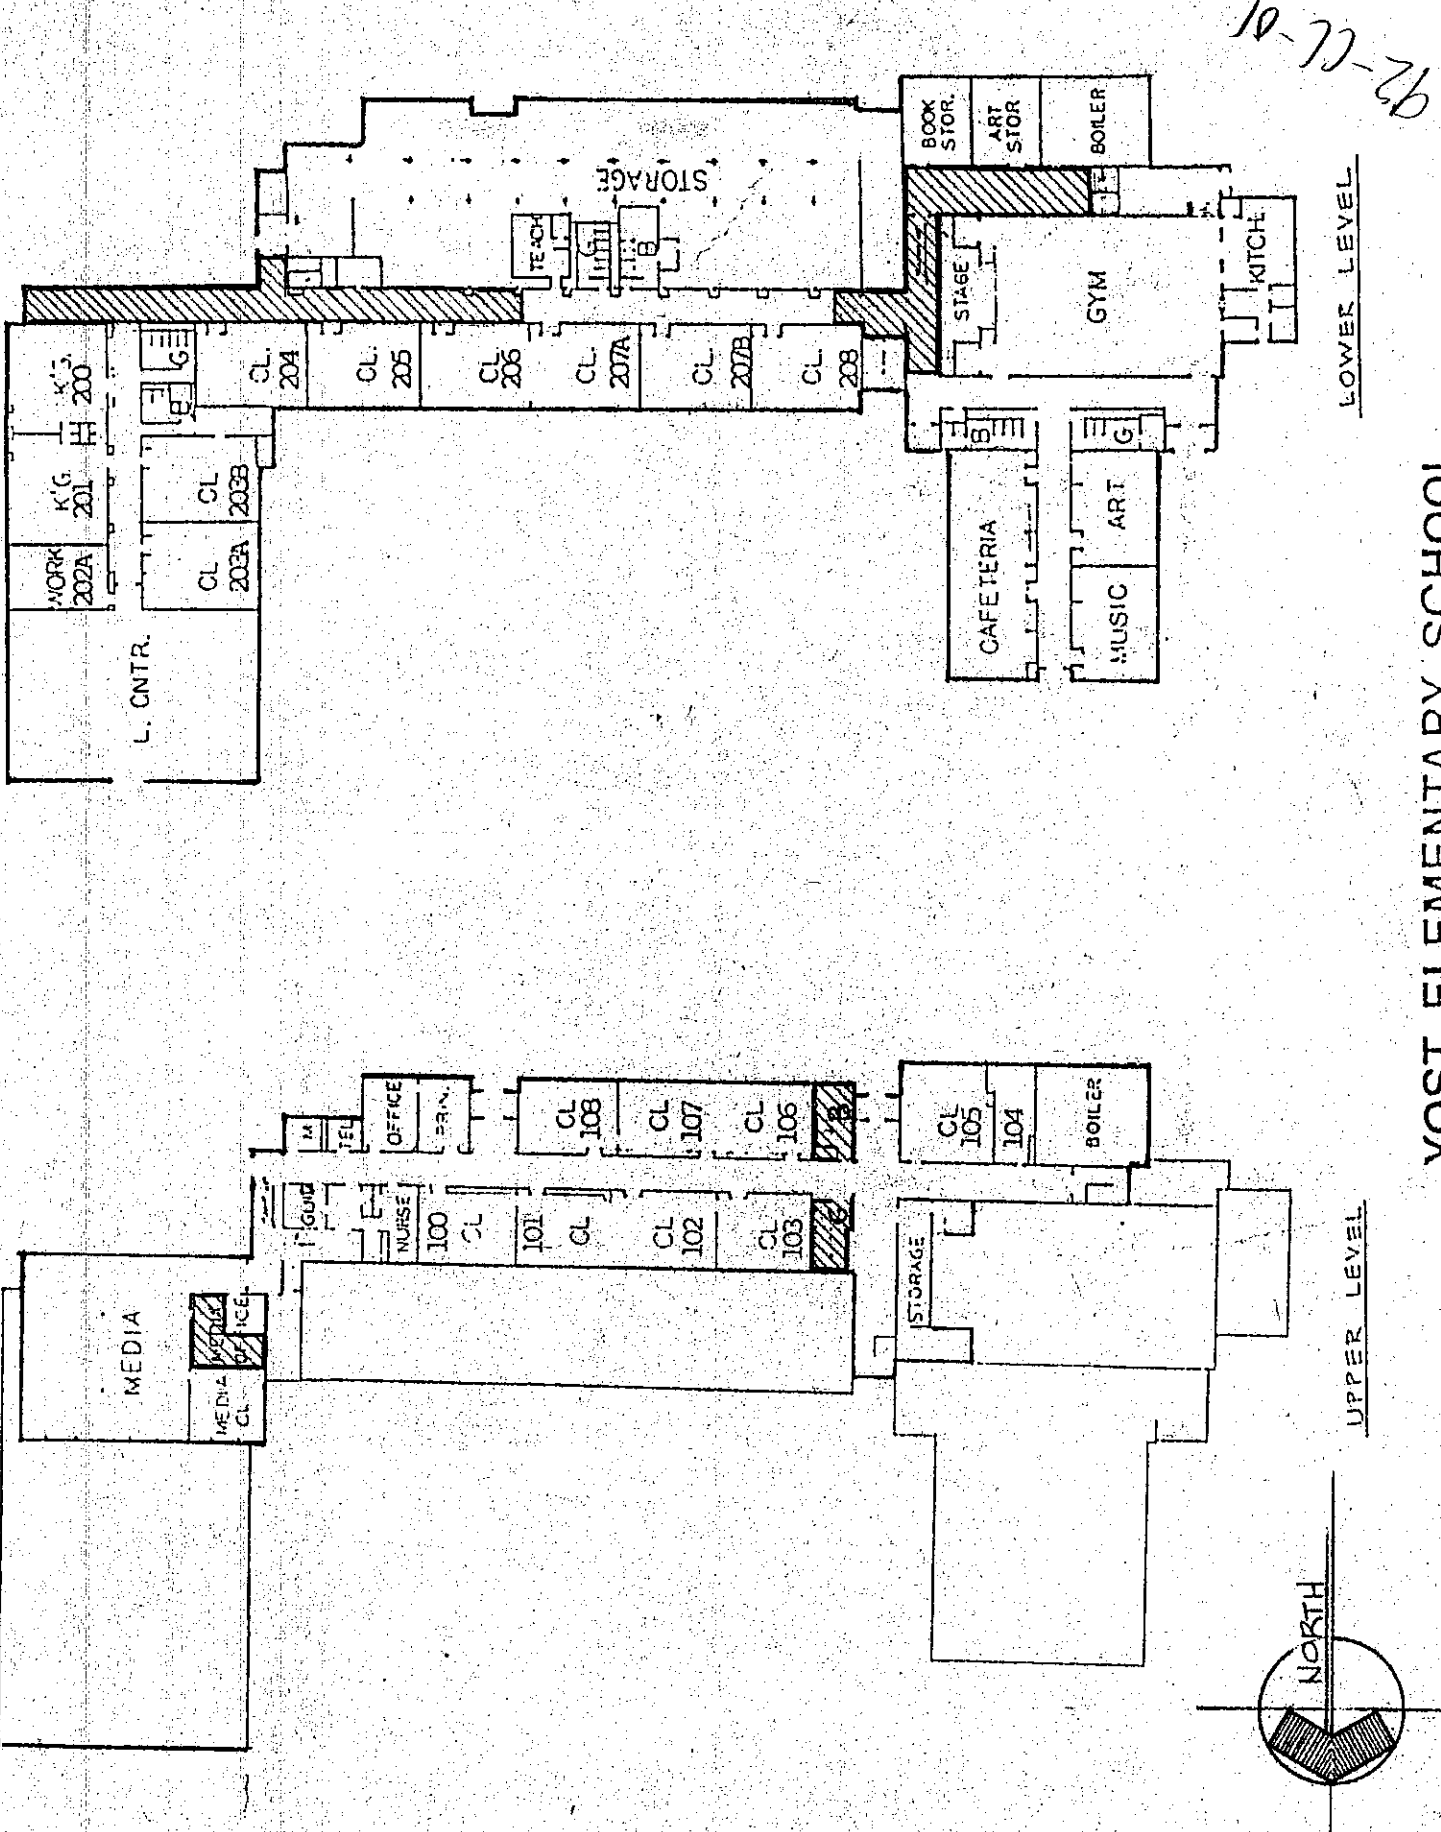

LOWER LEVEL PLAN
YOST ELEMENTARY SCHOOL CEILING & LIGHTING

UPPER FLOOR PLAN
YOST ELEMENTARY SCHOOL CEILING & LIGHTING