
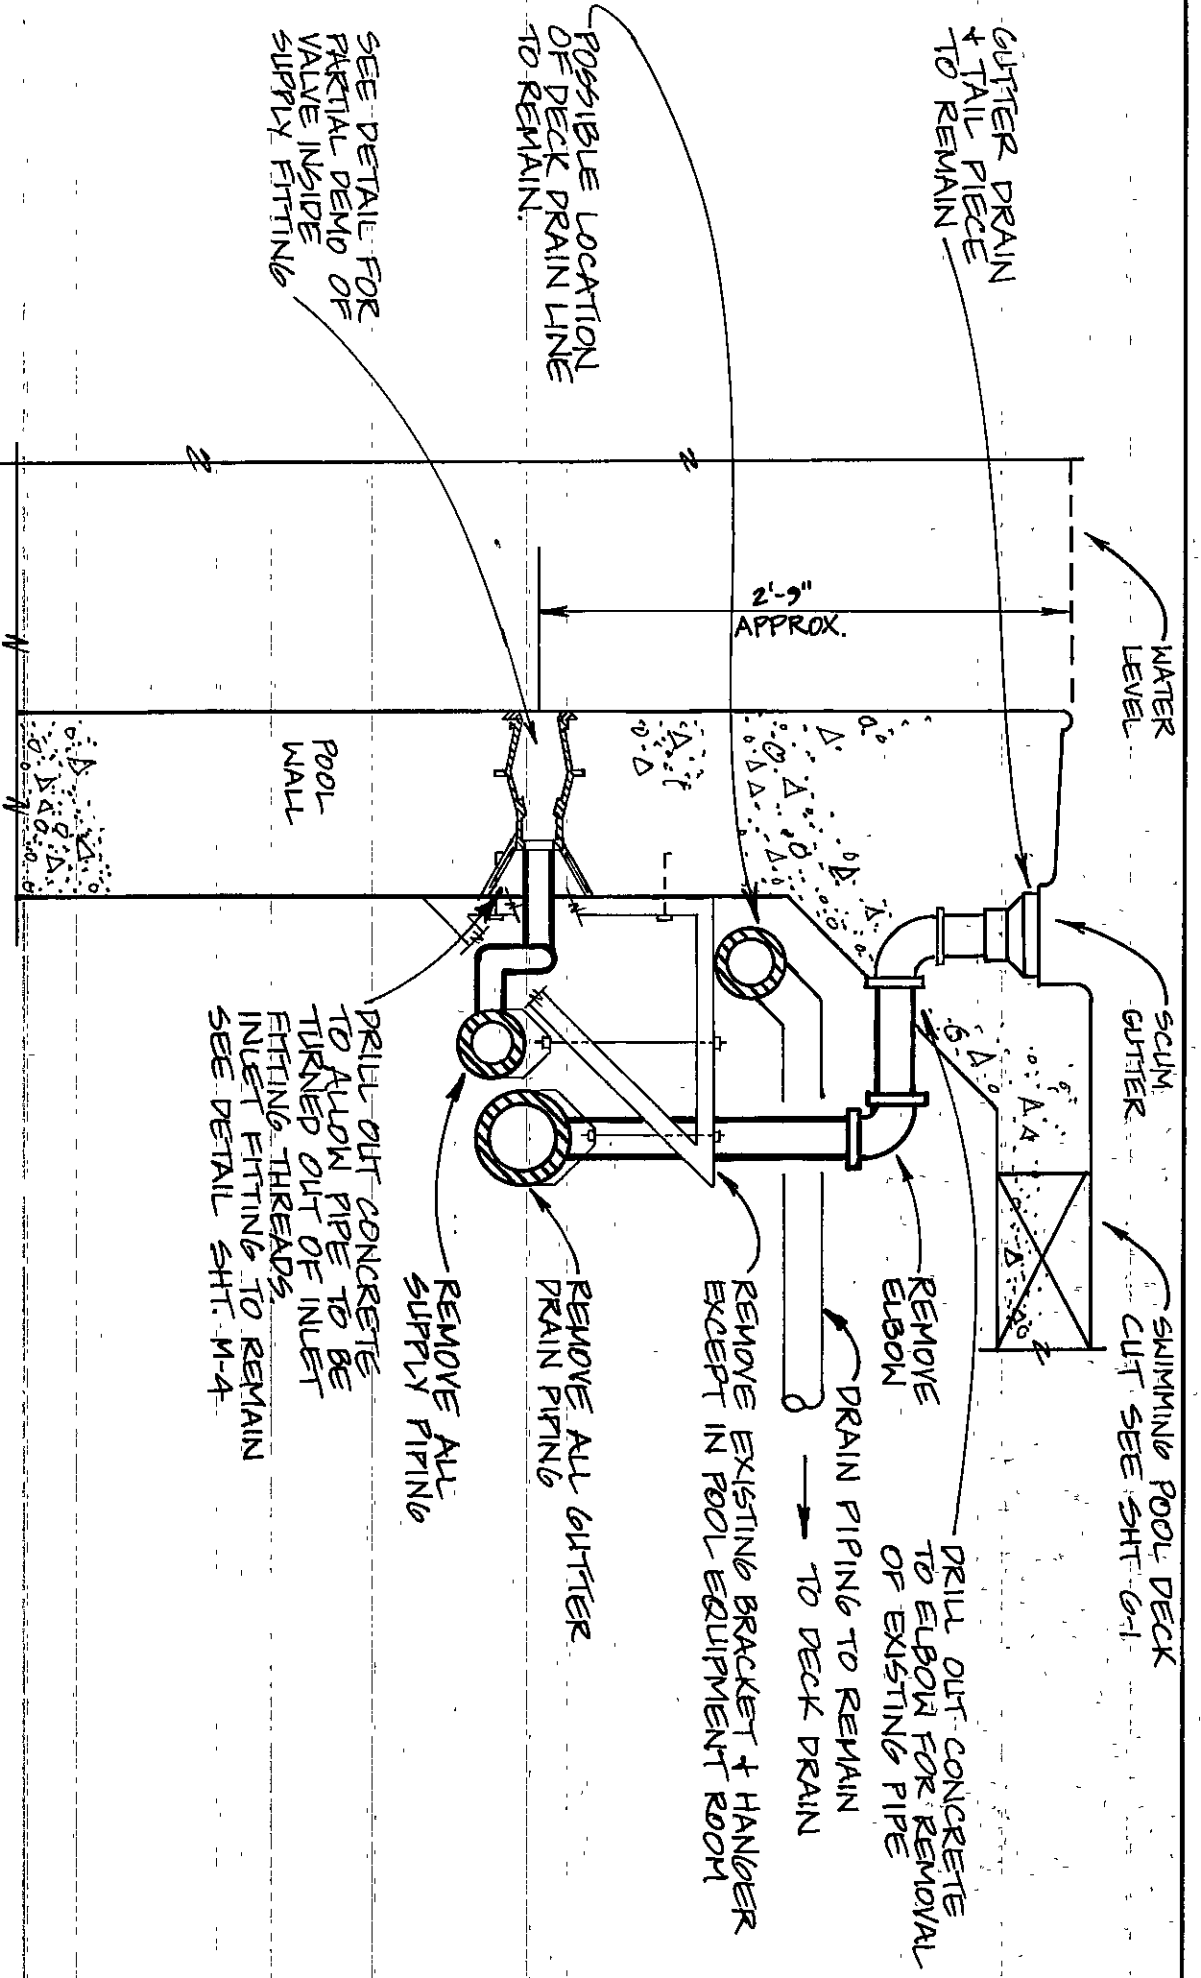


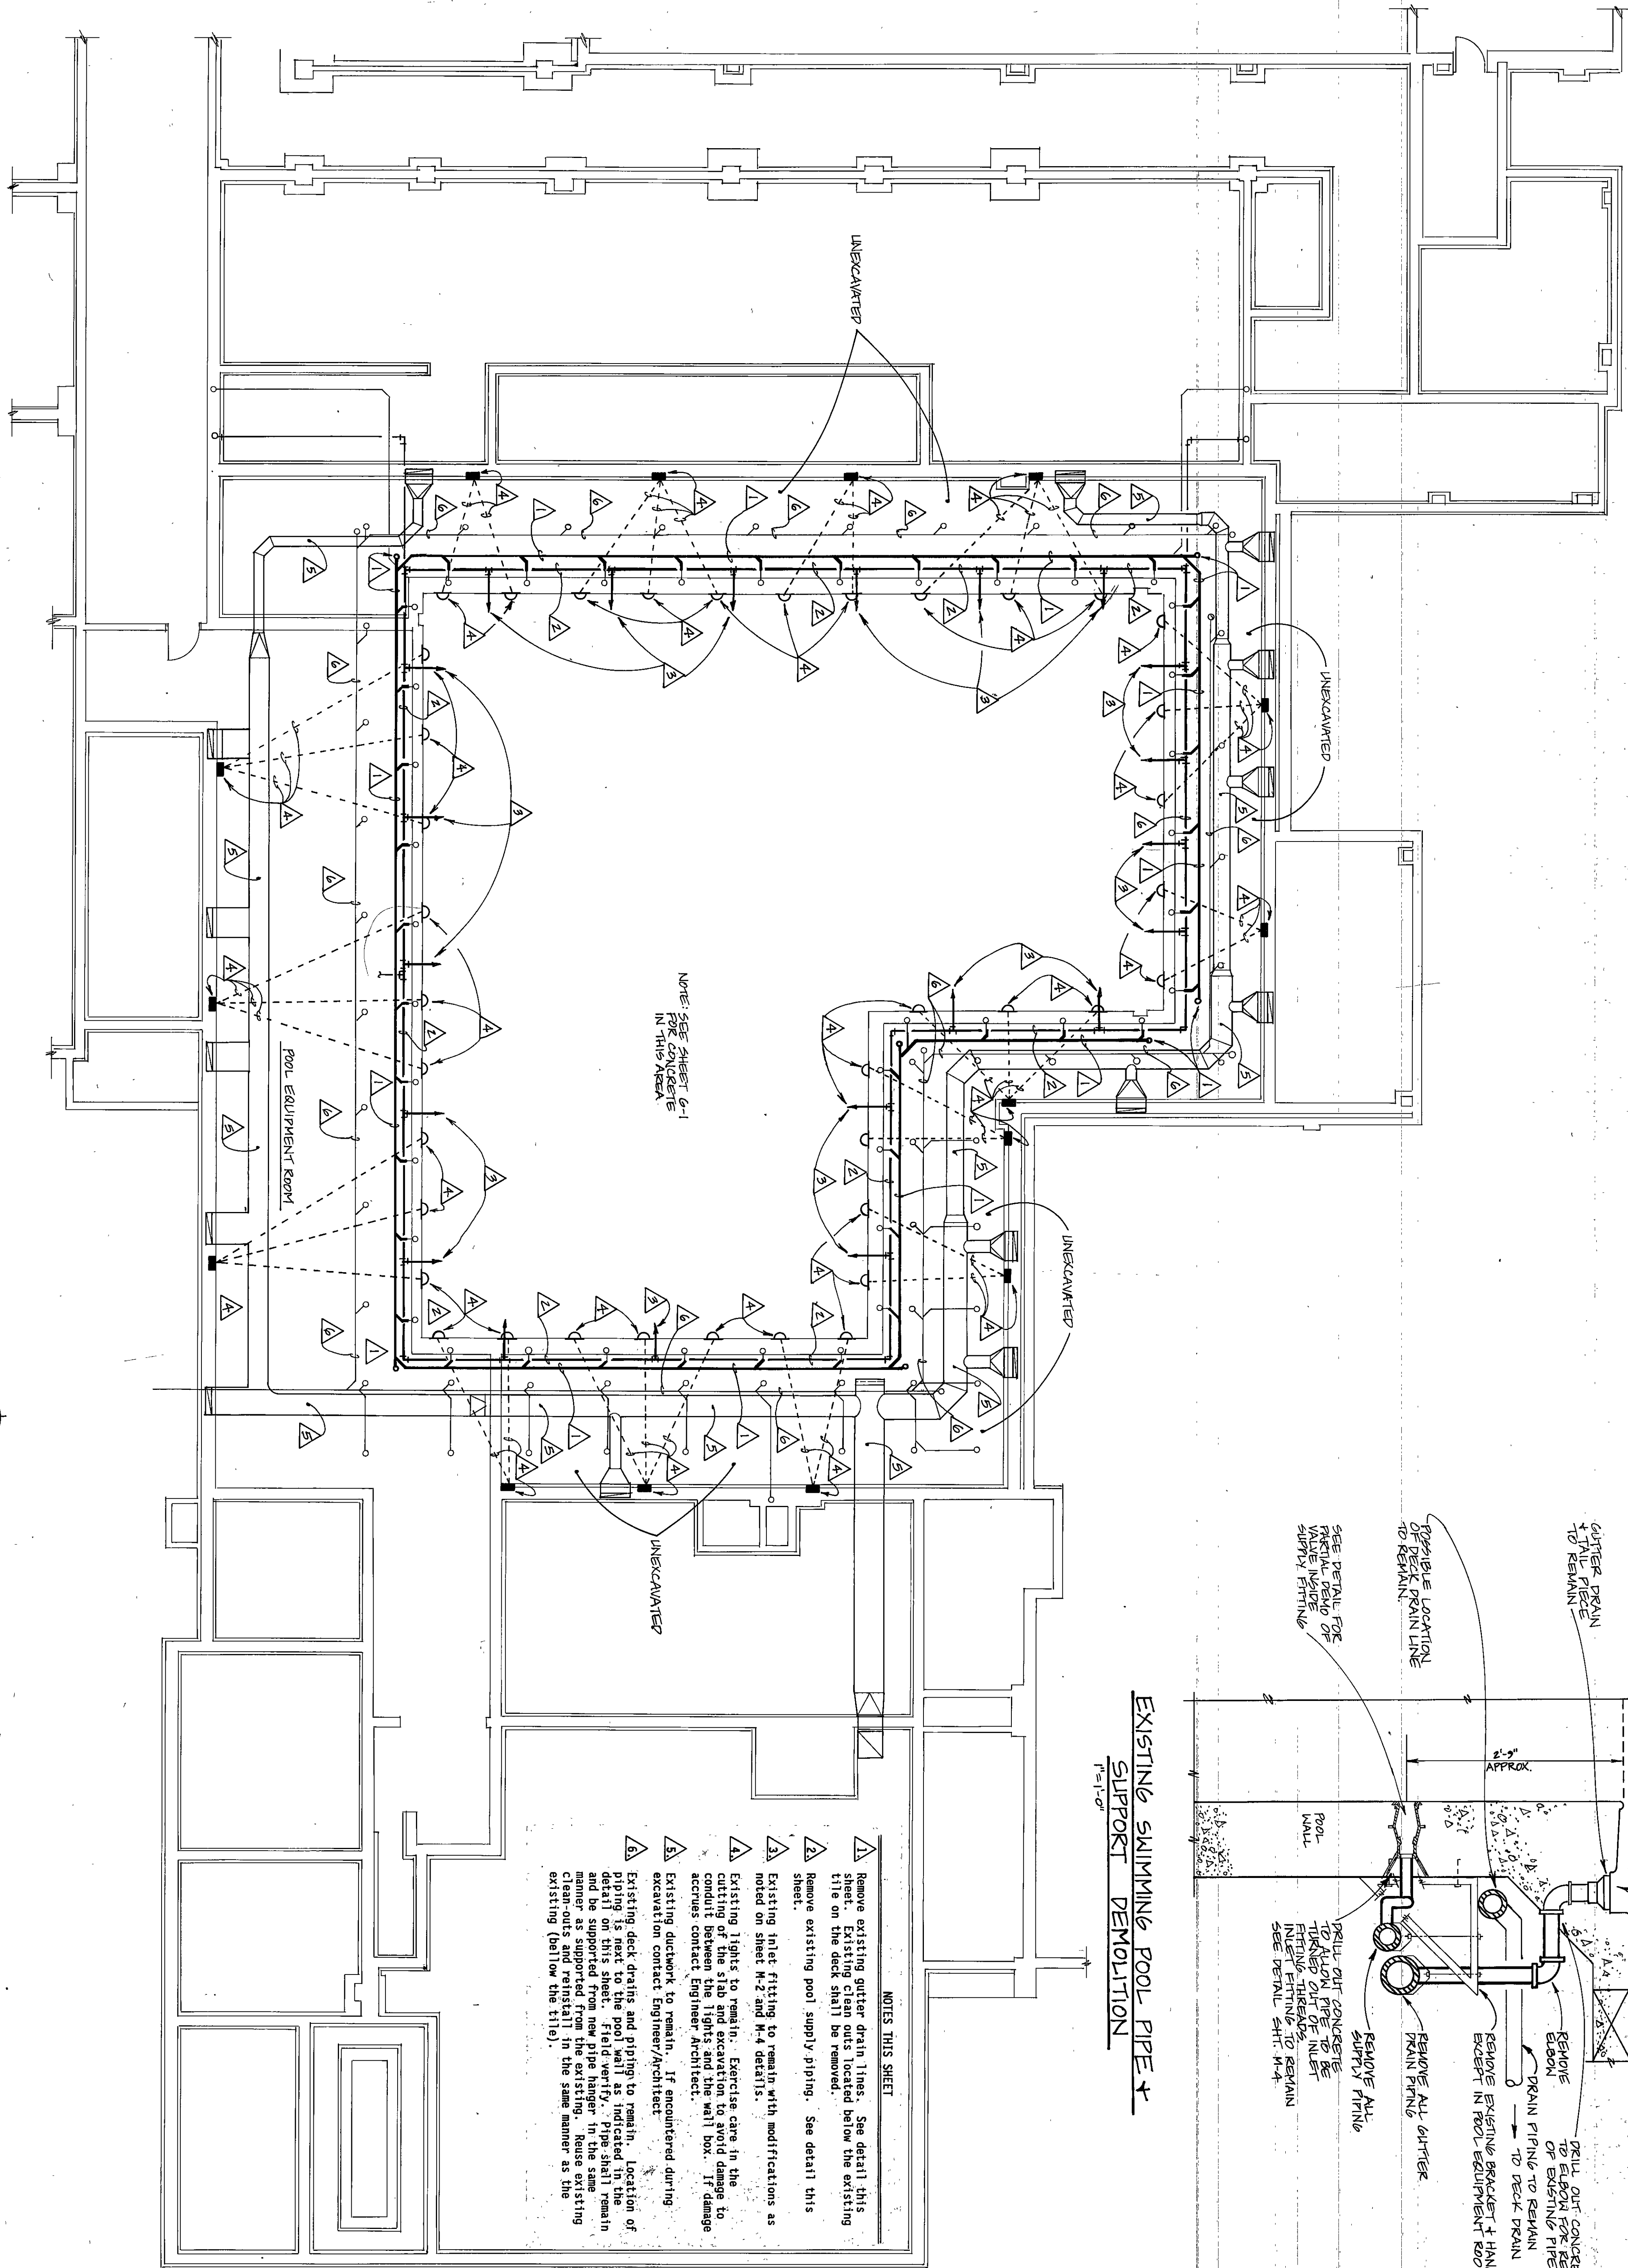


EXISTING SWIMMING POOL PIPE & SUPPORT DEMOLITION
1/8\"/>

NOTES THIS SHEET

- 1 Remove existing gutter lines. See detail this sheet. Existing clean outs located below the existing tile on the deck shall be removed.
- 2 Remove existing pool supply piping. See detail this sheet.
- 3 Existing inlet fitting to remain with modifications as noted on sheet M-2 and M-4 details.
- 4 Existing lights to remain. Exercise care in the cutting of the slab and excavation to avoid damage to conduit between the lights and the wall box. If damage accrues contact Engineer/Architect.
- 5 Existing ductwork to remain. If encountered during excavation contact Engineer/Architect.
- 6 Existing deck drains and piping to remain. Location of piping is next to the pool wall as indicated in the detail on this sheet. Field verify. Pipe shall remain in place as supported from new pipe hanger in the same manner as supported from the existing. Reuse existing clean-outs and re-install in the same manner as the existing (below the tile).

POOL PERIMETER PIPING DEMOLITION PLAN
1/8\"/>



REVISIONS	BY



DEMOLITION PLAN FOR PERIMETER PIPING

SWIMMING POOL FILTER & PIPING PROJECT

DUNELAND SCHOOL CORPORATION

gerometta & kinel architects, inc.

CHESTERTON, INDIANA

chesterton, indiana

M-2

Sheet

of 5

Drawn M.T.

Job #221 A

Date FEB. 18, 1992

Scale As NOTED

92-M-02