




DATE PRINTED: 5/12/95
DRAWN BY: LAS
SHEET: 9507
OF 8 SHEETS

- PAVING LEGEND**
-  **TYPICAL RESURFACING** (where indicated on Drwgs.)
A. After surface preparation & tackcoat complete, install a min. 1 1/2" layer of Hot Asphaltic Concrete Surface Coat.
 -  **NEW ASPHALT PAVING WORK** (where indicated on Drwgs.)
A. Excavate approx. 12" topsoil.
B. Install 8" compacted stone subgrade.
C. Prime coat and install 2 1/2" hot asphaltic concrete binder.
D. Install a min. 1 1/2" layer of hot asphaltic concrete surface coat.

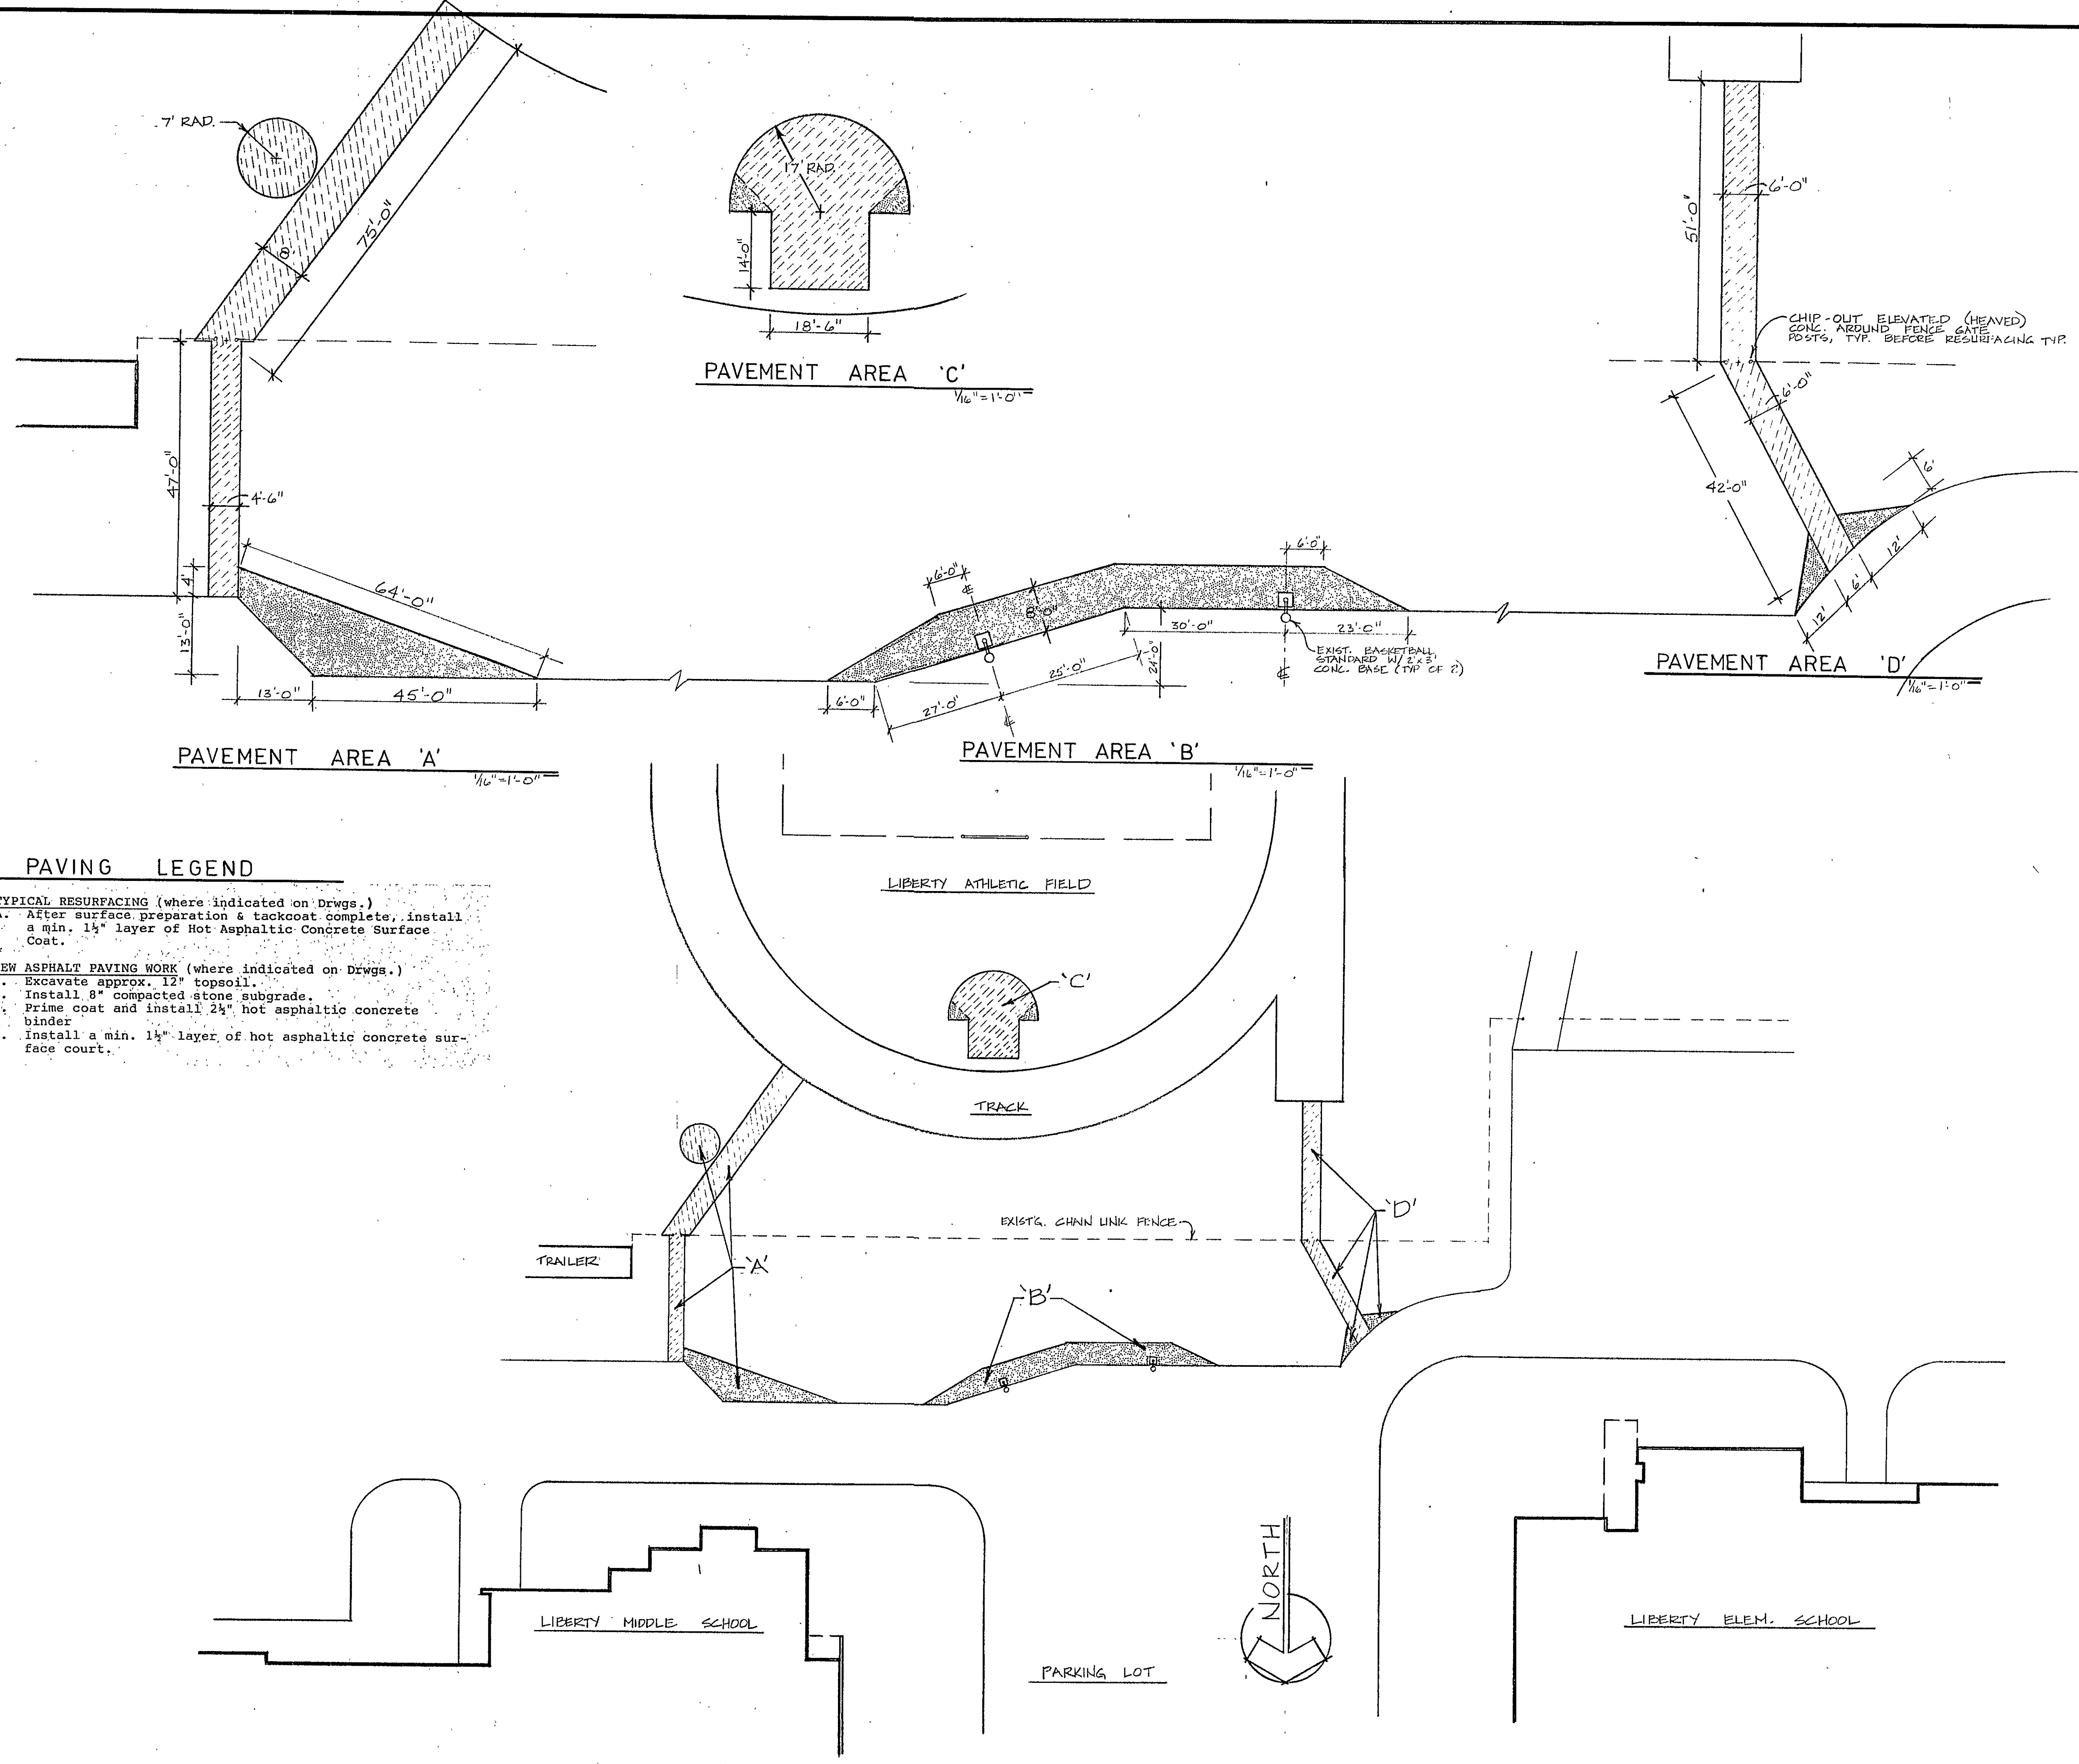

LMS ATHLETIC AREA PAVING & RESURFACING

REVISIONS	BY

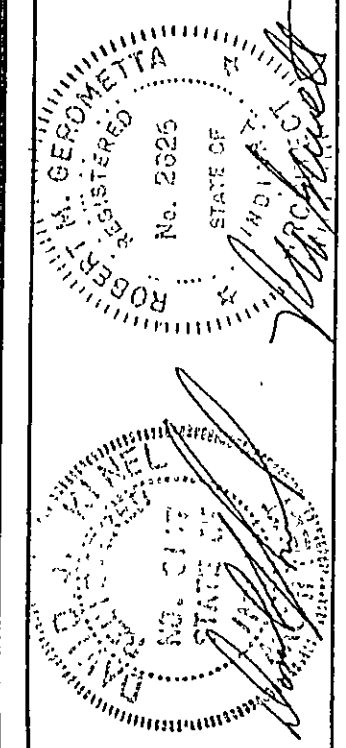

LMS ATHLETIC AREA PAVING & RESURFACING
SUMMER 1995 DUNELAND RENOVATION PROJECTS
DUNELAND SCHOOL CORPORATION
gerometta & kinel architects, inc.
chesterton, indiana
chesterton, indiana



DATE 5/12/95
SCALE AS NOTED
DRAWN LAS
JOB 9507
SHEET
A-6
OF 8 SHEETS

CONTRACT #3