

ROOM NO.	ROOM NAME	AREA	CEILING HEIGHT
C201	SCIENCE LAB	1406	9'-4" VARIES
C202	PREP. ROOM	206	9'-4" VARIES
C203	SCIENCE LAB	1436	VARIES
C204	PREP. ROOM	1505	9'-4" VARIES
C205	SCIENCE LAB	1505	VARIES

ROOM NO.	ROOM NAME	AREA	CEILING HEIGHT
C101	SCIENCE LAB	1509	VARIES
C102	PREP. ROOM	206	9'-4" VARIES
C103	SCIENCE LAB	1441	VARIES
C104	PREP. ROOM	1441	VARIES
C105	SCIENCE LAB	1509	VARIES

EQUIPMENT PLAN GENERAL NOTES


- INDICATES SCHEDULED RESIDENTIAL AND SPECIALTY CASEWORK. REFER TO SPECIFICATION SECTION 11450 FOR SCHEDULE.
- INDICATES SCHEDULED PARAPET CASEWORK. REFER TO SPECIFICATION SECTION 11470 FOR SCHEDULE.
- INDICATES SCHEDULED PHYSICAL EDUCATION CASEWORK. REFER TO SPECIFICATION SECTION 11460 FOR SCHEDULE.
- INDICATES SCHEDULED MEDIA CENTER CASEWORK. REFER TO SPECIFICATION SECTION 12310 FOR SCHEDULE.
- INDICATES SCHEDULED EDUCATIONAL CASEWORK. REFER TO SPECIFICATION SECTION 12324 FOR SCHEDULE.
- INDICATES SCHEDULED SCIENCE CASEWORK. REFER TO SPECIFICATION SECTION 12345 FOR SCHEDULE.
- INDICATES SCHEDULED MUSIC CASEWORK. REFER TO SPECIFICATION SECTION 12324 FOR SCHEDULE.
- COUNTERTOPS SHALL BE PROVIDED WITH A 4" HIGH BACKSPLASH AND ENDSPASH EXCEPT WHEN DETAILED OTHERWISE.
- PROVIDE FILTERS AS REQUIRED BETWEEN CASEWORK UNITS AND OTHER WALL UNITS AND WALL.
- PROVIDE CONTINUOUS COUNTERTOPS.
- ALL EXPOSED ENDS AND BACKS SHALL BE FINISHED.
- THE CABINET INSTALLER SHALL CALK BETWEEN COUNTERTOPS AND BACKSPLASHES, ENDSPASHES AND WALLS.
- THE CABINET INSTALLER SHALL CUT CASEWORK UNITS AS REQUIRED FOR PLUMBING/ELECTRICAL LINES AND CABINET-INSTALLED EQUIPMENT.
- ALL WALL-MOUNTED CASEWORK SHALL BE MOUNTED WITH THE TOP @ 7'-0" A.F.F. UNLESS NOTED OTHERWISE.
- SEE SHEET A7.28 FOR MOUNTING HEIGHTS.
- ALL CASEWORK DOORS AND DRAWERS SHALL BE LOCKABLE - KEYS PER ROOM UNLESS NOTED OTHERWISE.
- CABINETS INDICATED TO RECEIVE SINKS SHALL BE CONSTRUCTED TO ALLOW FOR INSTALLATION OF SINKS FOR SIZES INDICATED. COORDINATE WITH DIVISION 15 FOR SINK SIZES.
- PROVIDE A FINISHED TOP ON ALL CABINETS THAT DO NOT HAVE A BULKHEAD ABOVE THEM.
- PROVIDE ABOVE ALL WALL CABINETS BELOW BULKHEADS CLOSURE PIECE. REFER TO DETAIL 3-A7.28.
- REFER TO DETAIL 4-A7.29 FOR WALL CABINET CONSTRUCTION.
- VERIFY LOCATION OF T.V. MONITOR IN CLASSROOMS IF ALTERNATIVE FOR THE SLOPED PROJECTION SCREEN IS NOT ACCEPTED.

LOCKER LEGEND

- 12" X 12" X 60" STANDARD LOCKERS
REFER TO DETAIL 9-A7.23 & SPEC. SECT. 10500.
- 12" X 12" X 72" STANDARD LOCKERS
WITH SLOPED TOPS - REFER TO DETL 3-A7.30 & SPEC. SECT. 10500
- 12" X 12" X 60" ATHLETIC LOCKERS
WITH SLOPED TOPS - REFER TO DETAILS 1-A7.30 & 2-A7.30 AND SPEC. SECTION 10505
- 12" X 12" X 12" 5 TIER HIGH ATHLETIC LOCKERS WITH SLOPED TOPS - REFER TO DETAILS 1-A7.30 AND 2-A7.30 AND SPEC. SECTION 10505
- 24" X 18" X 72" ATHLETIC LOCKERS WITH SLOPED TOPS - REFER TO DETAIL 1-A7.29 & SPEC. SECT. 10505
- 24" X 21" X 72" ATHLETIC LOCKERS WITH SLOPED TOPS - REFER TO DETAIL 3-A7.30 & SPEC. SECT. 10505


CASEWORK NOTES

- UNIT HEIGHT HAS BEEN ADJUSTED TO 34" TO MEET AMERICANS WITH DISABILITIES ACT (ADA) PER SPEC. SECT. 12324 ARTICLE 1.08.1.
- PROVIDE A TACKSTRIP 4" BELOW ALL WALL CABINETS IN THIS ROOM.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATION OF COMPUTER RACK. MODIFY CASEWORK ACCORDINGLY.

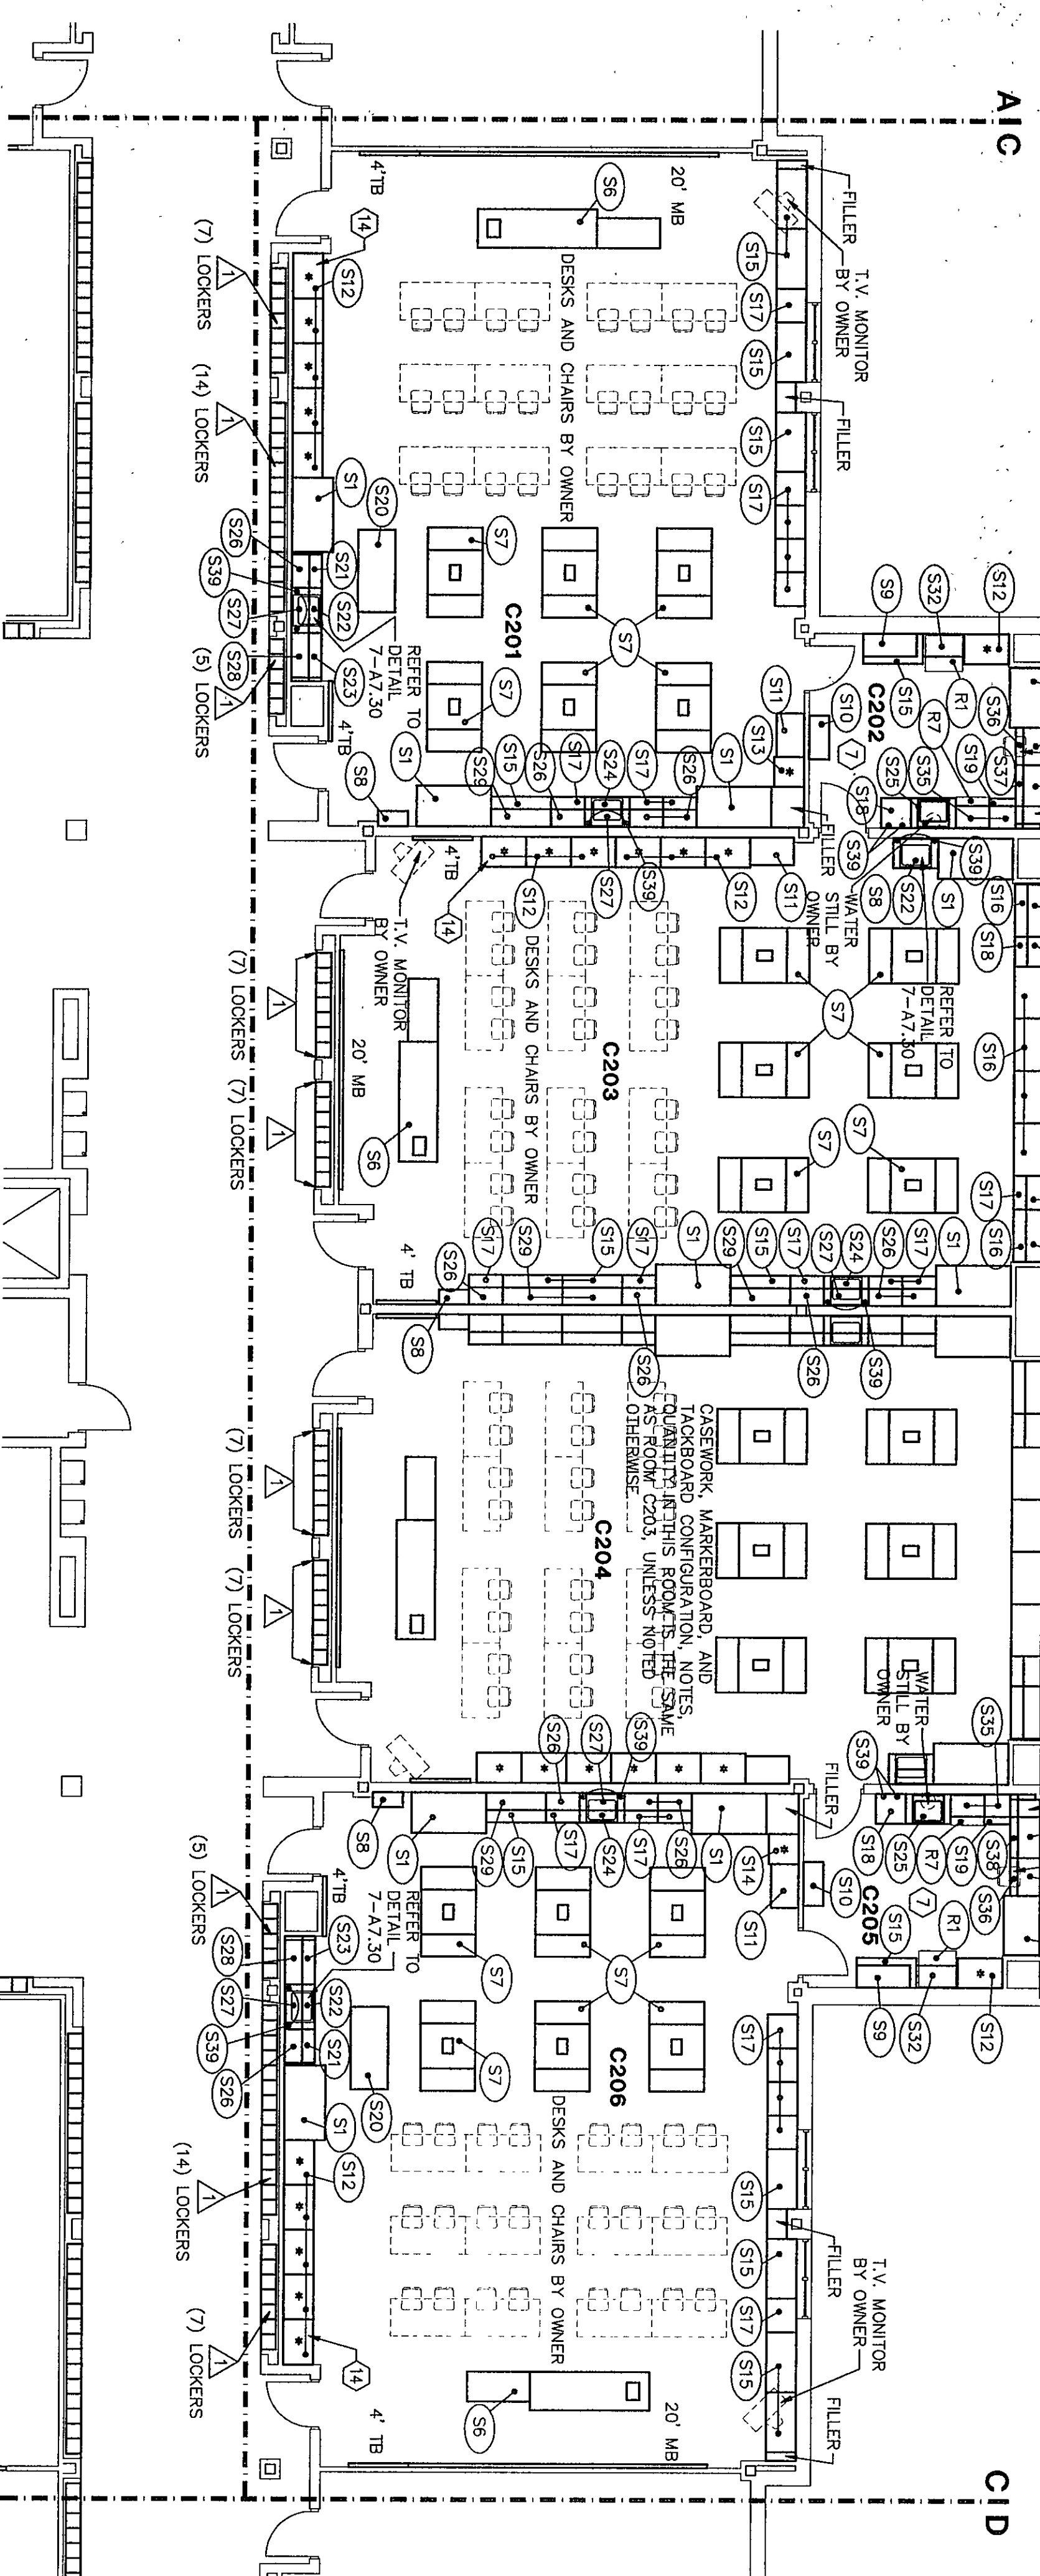


EQUIPMENT PLAN UNIT C2

1/8" = 1'-0"

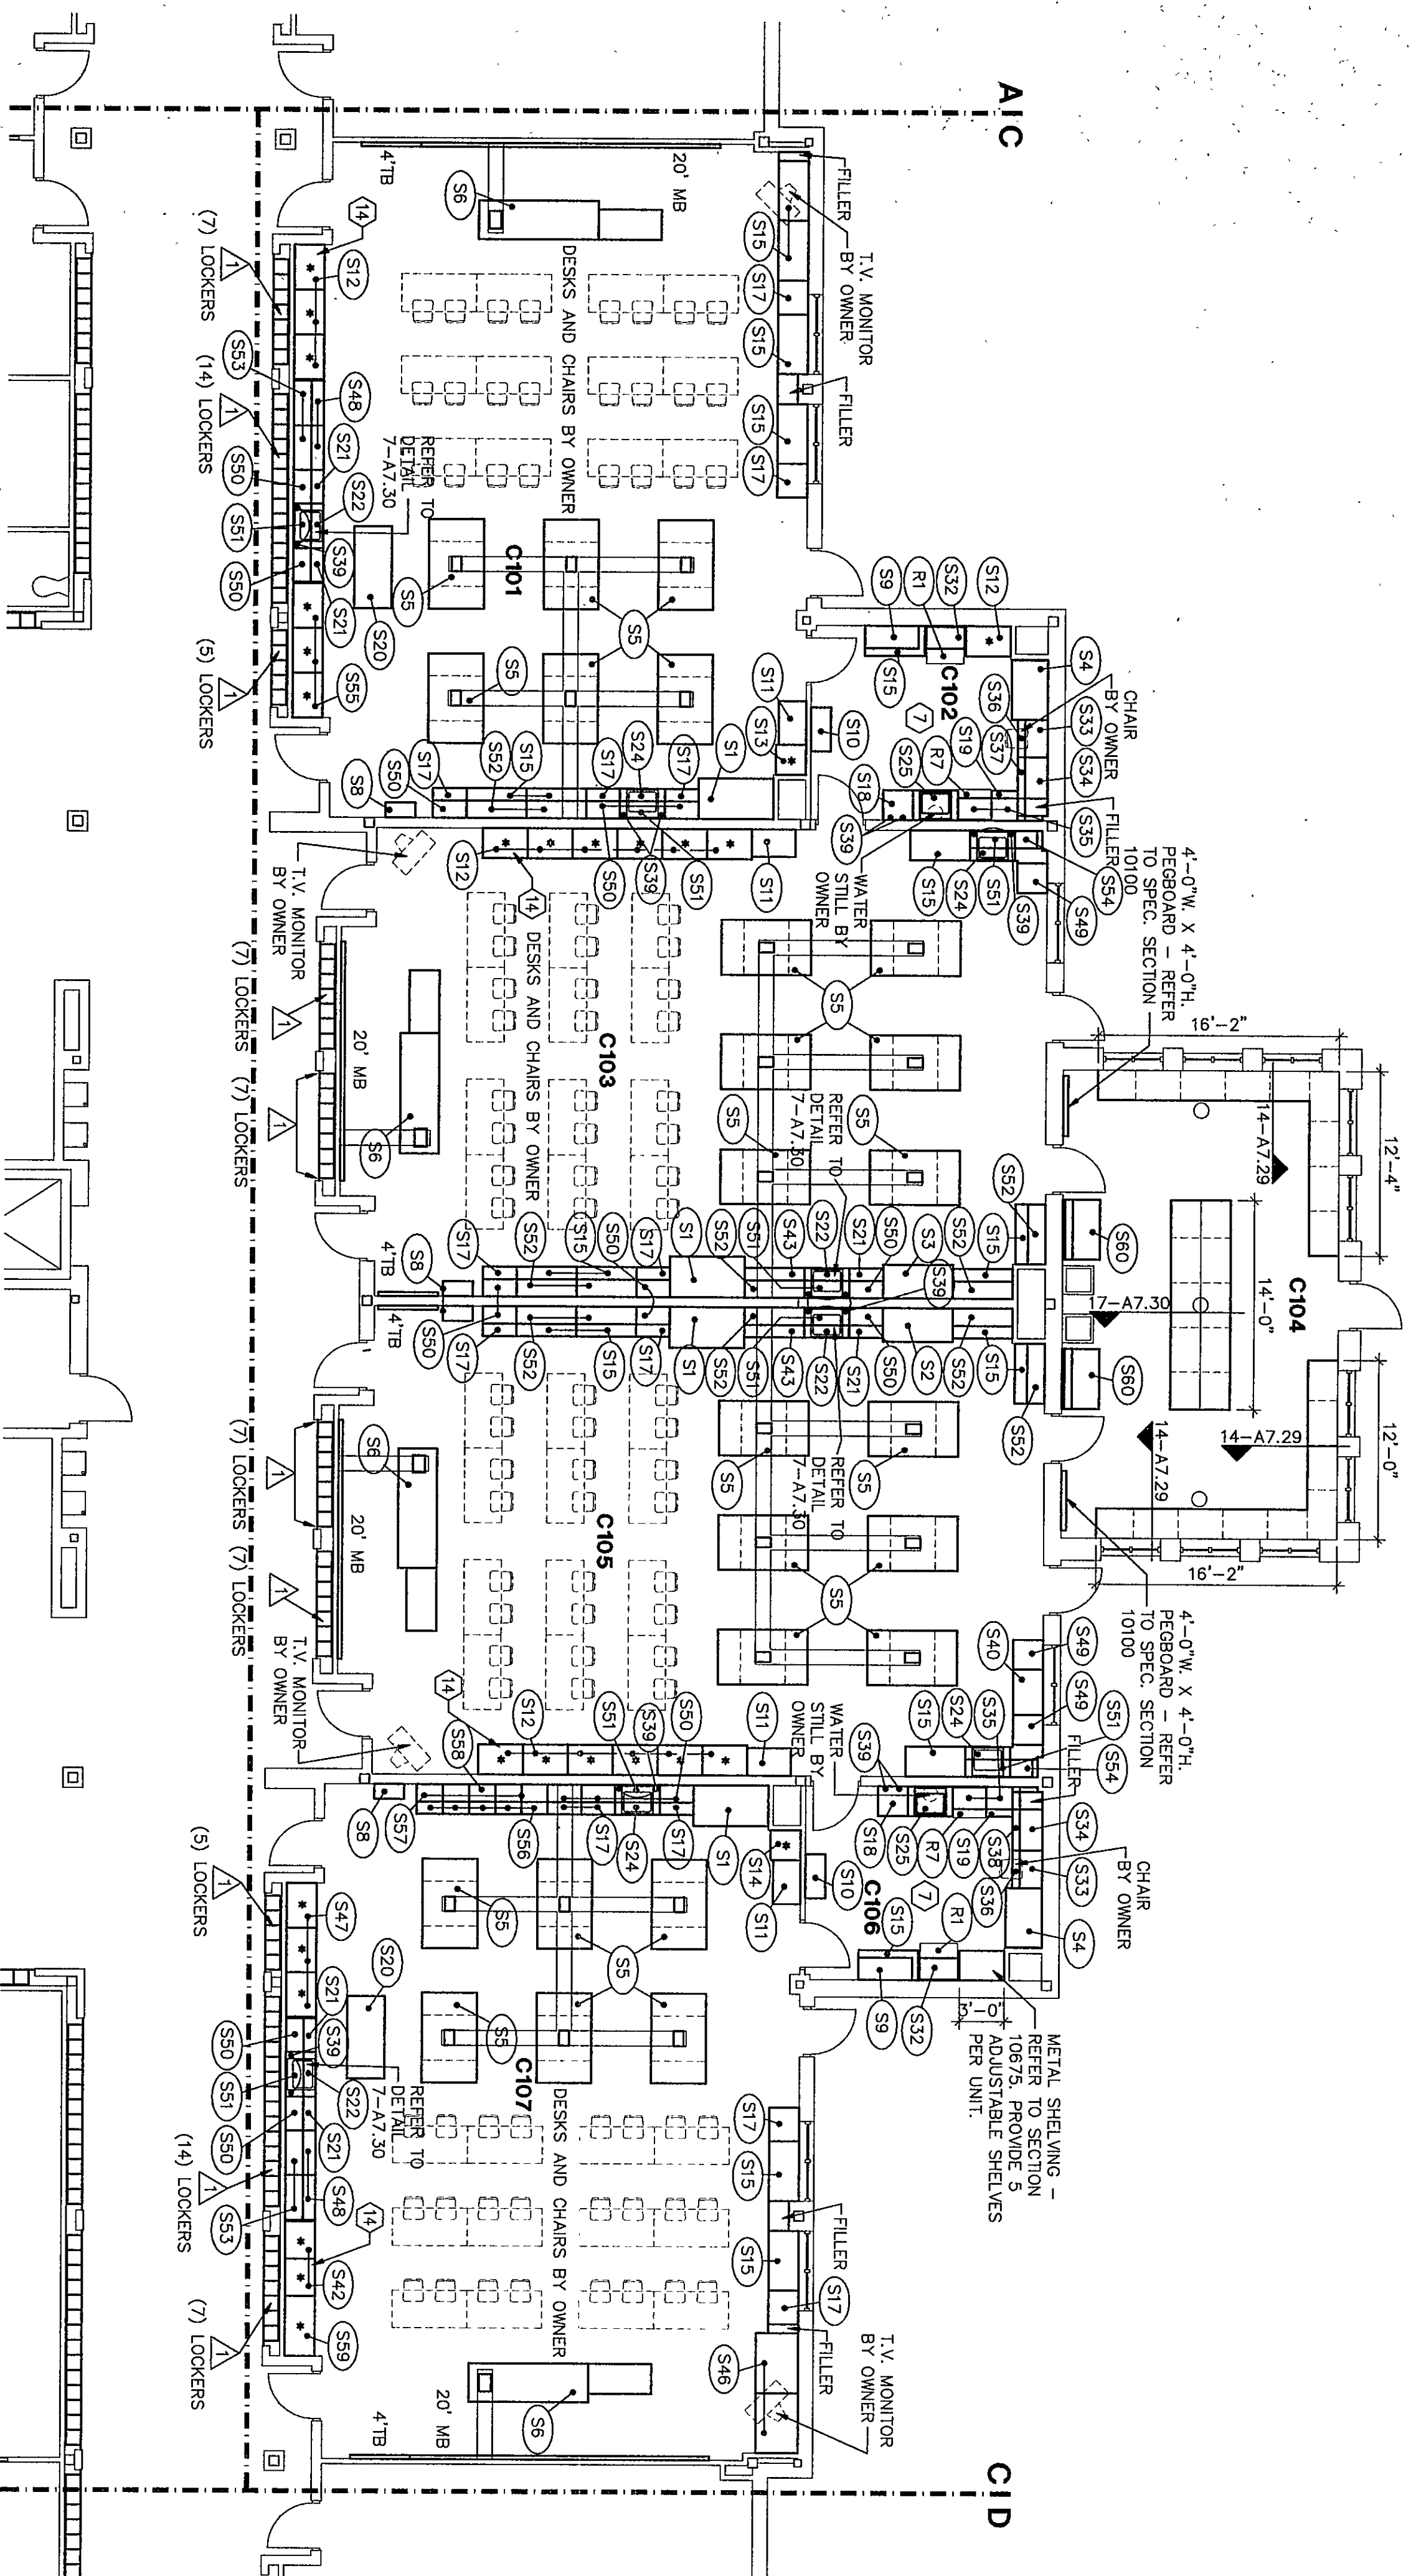


EQUIPMENT PLAN UNIT C1

1/8" = 1'-0"

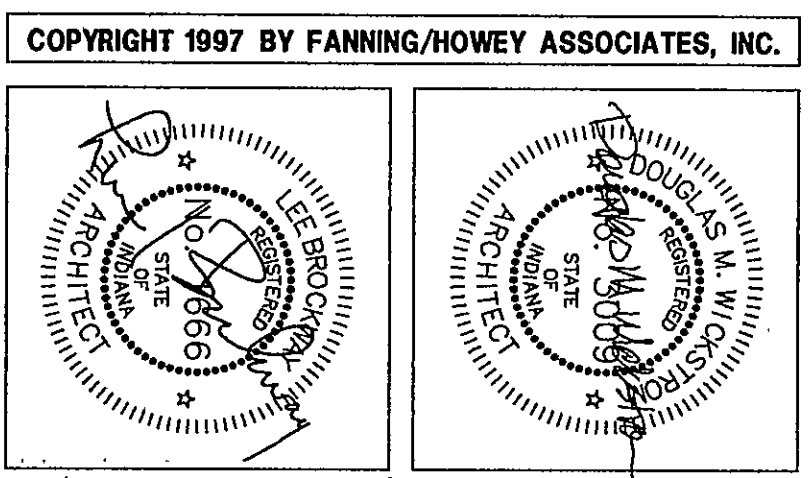

THE NEW
CHESTERTON HIGH SCHOOL
FOR THE
DUNELAND SCHOOL CORPORATION
CHESTERTON, INDIANA

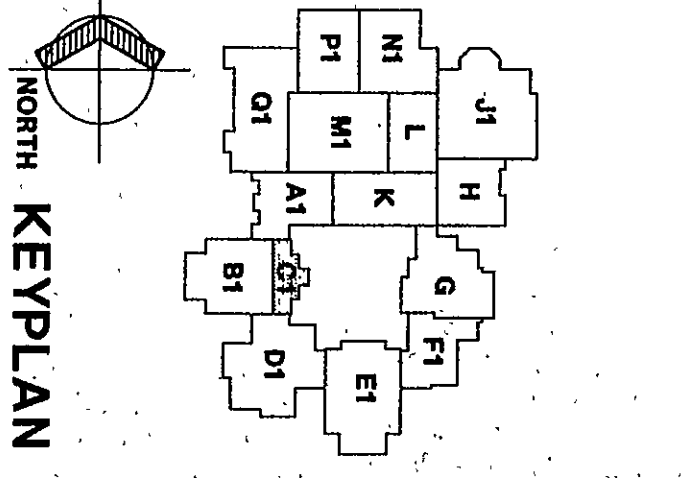

Fanning/Howey Associates, Inc.
Architects Engineers Consultants

EQUIPMENT PLAN UNIT C1,C2

DRAWN BY: LEC/SB COMM. NO.: 95067.00
CHECKED BY: JHJ DATE: APRIL 21, 1997

A7.5

REVISIONS NO. DATE