


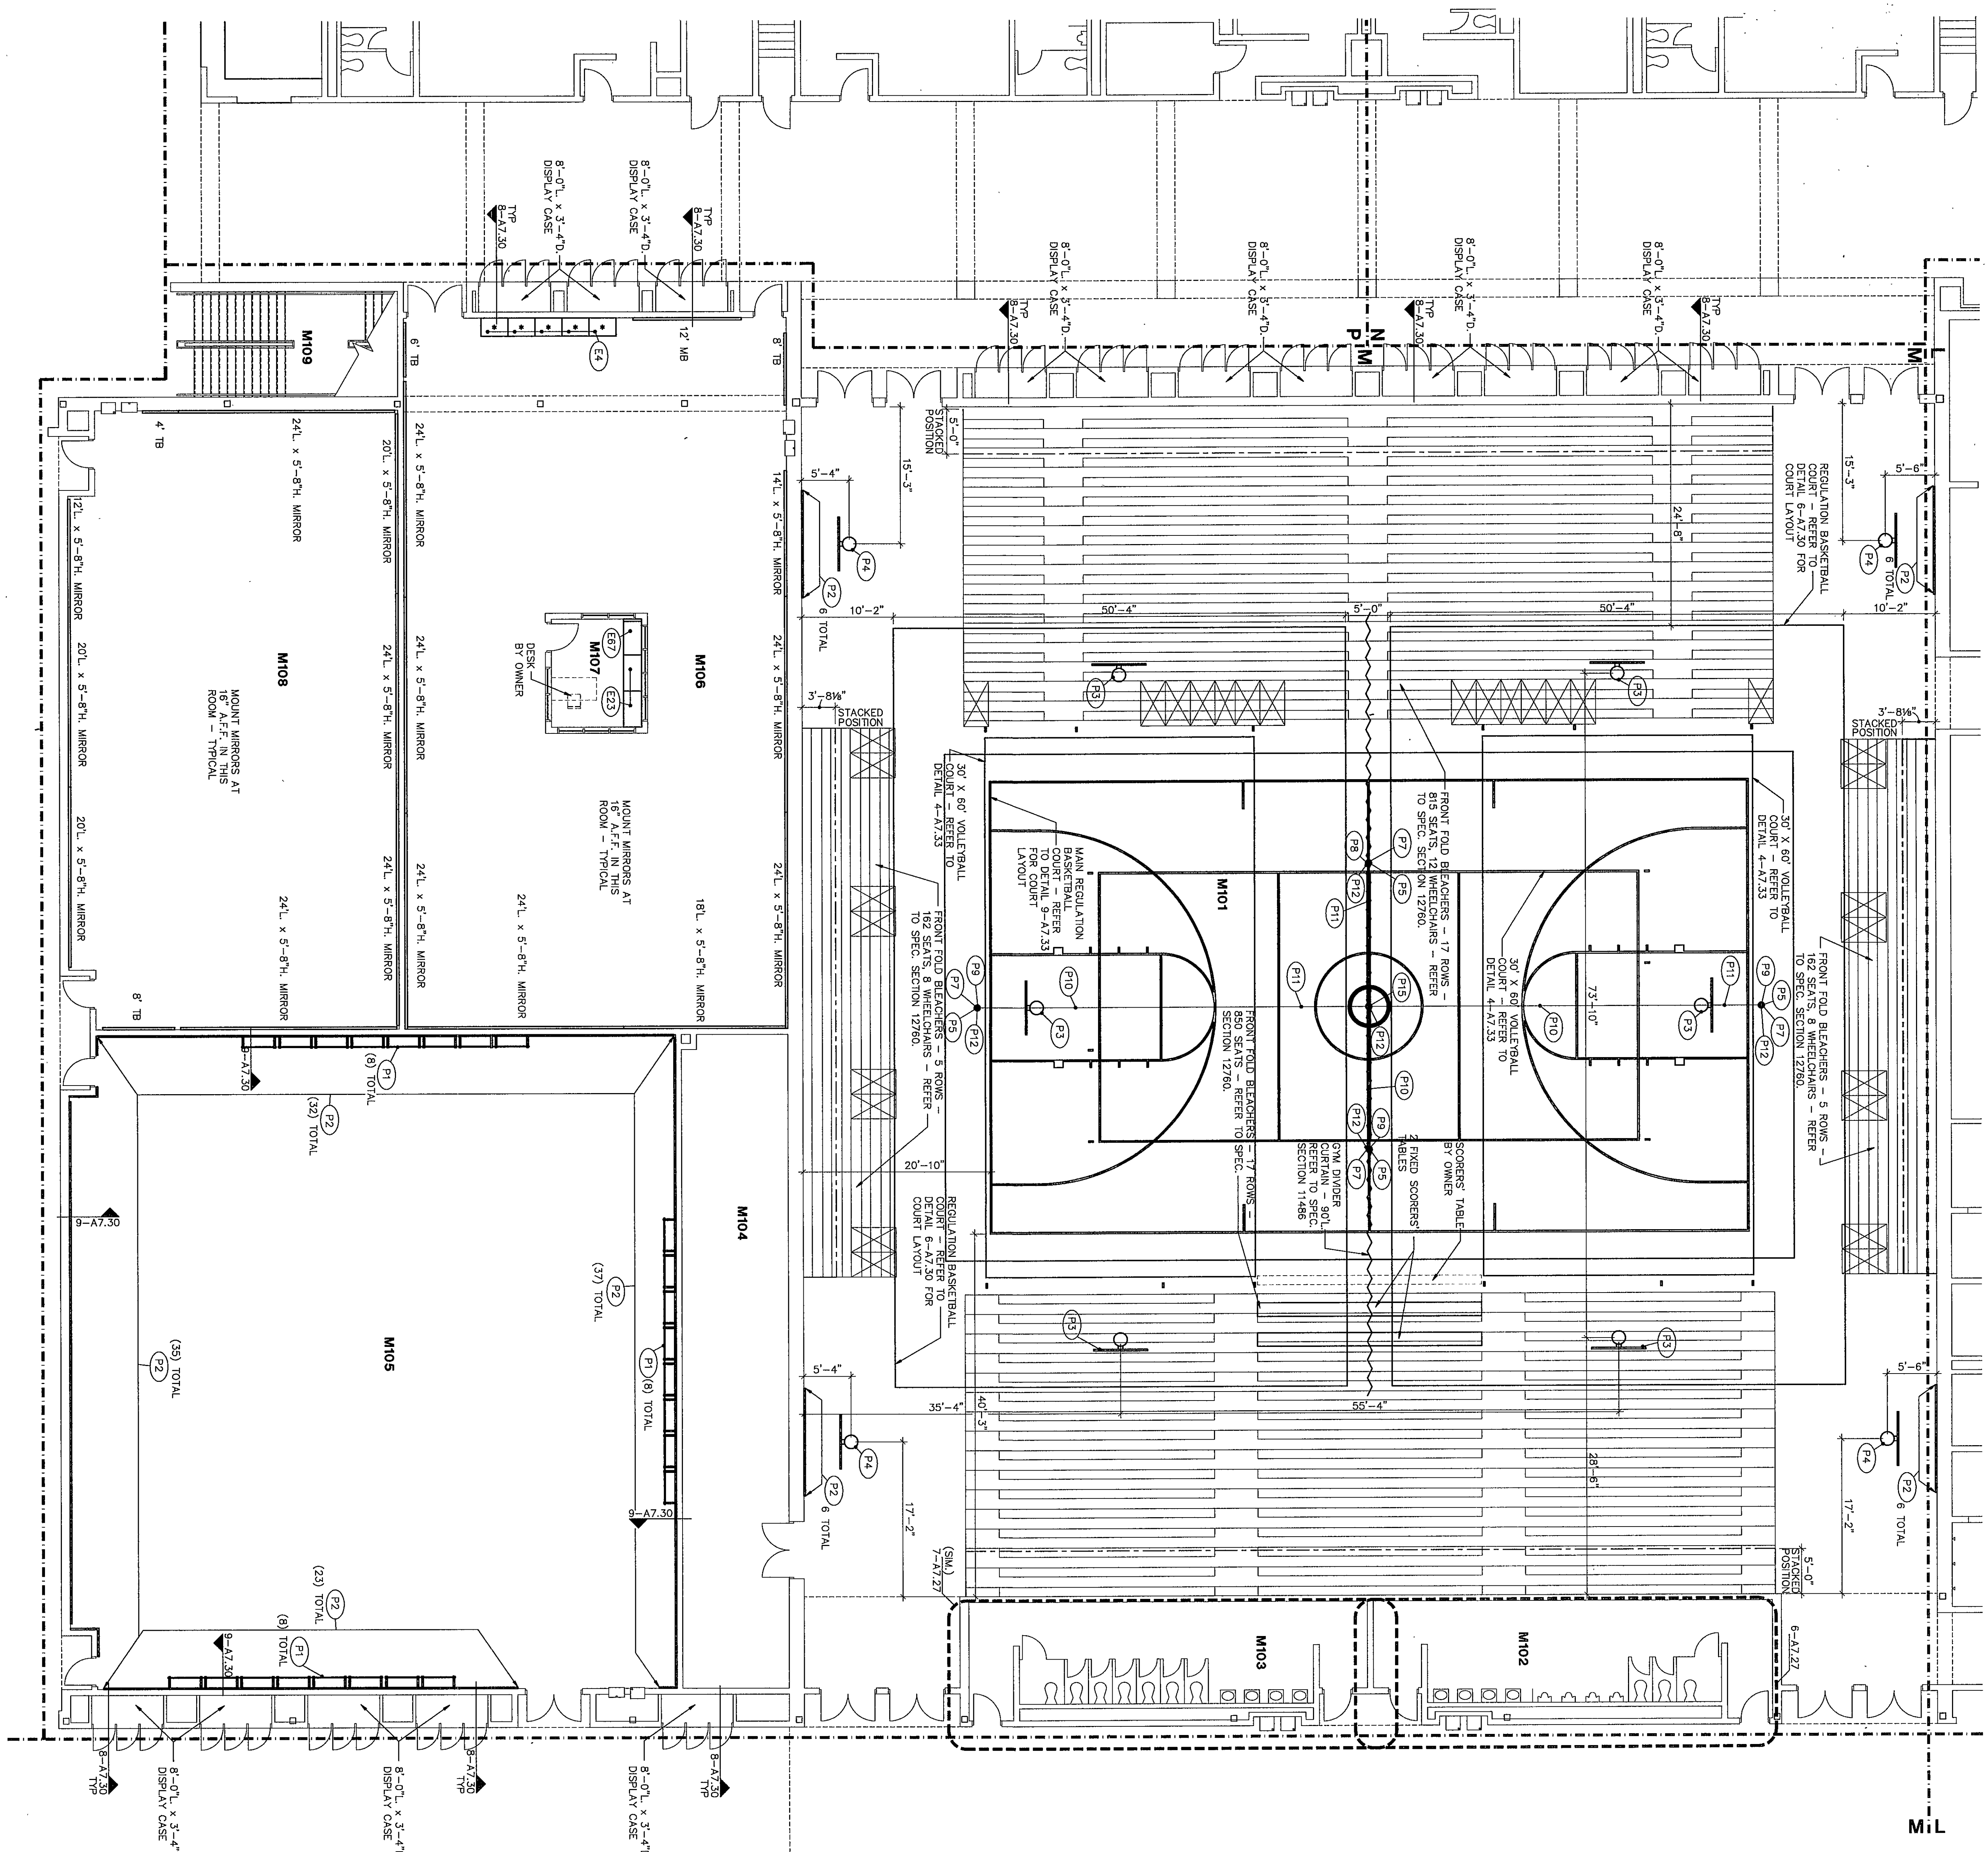

ROOM LEGEND "M1"


ROOM	AREA	CEILING	FLOOR
M101	17994	9'-4"	9'-4"
M102	492	9'-4"	9'-4"
M103	482	9'-4"	9'-4"
M104	483	10'-0"	10'-0"
M105	483	10'-0"	10'-0"
M106	2475	10'-0"	10'-0"
M107	244	10'-0"	10'-0"
M108	244	10'-0"	10'-0"
M109	244	10'-0"	10'-0"

- EQUIPMENT PLAN GENERAL NOTES**
- INDICATES SCHEDULED RESIDENTIAL AND SPECIALTY CASEWORK. REFER TO SPECIFICATION SECTION 11450 FOR SCHEDULE.
 - INDICATES SCHEDULED DARKROOM CASEWORK. REFER TO SPECIFICATION SECTION 11470 FOR SCHEDULE.
 - INDICATES SCHEDULED PHYSICAL EDUCATION CASEWORK. REFER TO SPECIFICATION SECTION 11480 FOR SCHEDULE.
 - INDICATES SCHEDULED MEDIA CENTER CASEWORK. REFER TO SPECIFICATION SECTION 12315 FOR SCHEDULE.
 - INDICATES SCHEDULED EDUCATIONAL CASEWORK. REFER TO SPECIFICATION SECTION 12324 FOR SCHEDULE.
 - INDICATES SCHEDULED SCIENCE CASEWORK. REFER TO SPECIFICATION SECTION 12345 FOR SCHEDULE.
 - INDICATES SCHEDULED MUSIC CASEWORK. REFER TO SPECIFICATION SECTION 12324 FOR SCHEDULE.
 - COUNTERTOPS SHALL BE PROVIDED WITH A 4" HIGH BACKSPASH AND ENDGRASP EXCEPT WHEN DETAIL OTHERWISE.
 - PROVIDE TILES AS REQUIRED BETWEEN CASEWORK UNITS AND OTHER WALL UNITS AND WALL.
 - PROVIDE CONTINUOUS COUNTERTOPS.
 - ALL EXPOSED EDGES AND BACKS SHALL BE FINISHED.
 - THE CABINET INSTALLER SHALL GROUT BETWEEN COUNTERTOPS AND BACKS/EDGES, BACKS/EDGES AND WALLS.
 - THE CABINET INSTALLER SHALL CUT CASEWORK UNITS AS REQUIRED FOR PLUMBING/ELECTRICAL LINES AND CABINET-INSTALLED EQUIPMENT.
 - ALL WALL-MOUNTED CASEWORK SHALL BE MOUNTED WITH THE TOP @ 7'-0" A.F.F. UNLESS NOTED OTHERWISE. SEE SHEET A7.26 FOR MOUNTING HEIGHTS.
 - ALL CASEWORK DOORS AND DRAWERS SHALL BE LOCKABLE - KEYS PER ROOM UNLESS NOTED OTHERWISE.
 - CABINETS INDICATED TO RECEIVE SINKS SHALL BE CONSTRUCTED COORDINATE WITH DIVISION 15 FOR SINK SIZES.
 - PROVIDE A FINISHED TOP ON ALL CABINETS THAT DO NOT HAVE A BULKHEAD ABOVE THEM.
 - PROVIDE ABOVE ALL WALL CABINETS BELOW BULKHEADS CLOSURE PIECE. REFER TO DETAIL 3-A7.28.
 - REFER TO DETAIL 4-A7.29 FOR WALL CABINET CONSTRUCTION.
 - VERIFY LOCATION OF T.V. MONITOR IN CLASSROOMS IF ALTERNATIVE FOR THE SCHEDULED PROJECTION SCREEN IS NOT ACCEPTED.

LOCKER LEGEND

- 12" x 12" x 60" STANDARD LOCKERS. REFER TO DETAIL 3-A7.29 & SPEC. SECT. 10500.
 - 12" x 12" x 72" STANDARD LOCKERS WITH SLOPED TOPS. REFER TO DETAIL 3-A7.30 & SPEC. SECT. 10500.
 - 12" x 12" x 60" ATHLETIC LOCKERS. REFER TO DETAIL 3-A7.30 & SPEC. SECT. 10505.
 - 12" x 12" x 72" 5-TIER HIGH ATHLETIC LOCKERS WITH SLOPED TOPS. REFER TO DETAIL 3-A7.30 AND 2-A7.30 AND SPEC. SECTION 10505.
 - 24" x 18" x 72" ATHLETIC LOCKERS WITH SLOPED TOPS. REFER TO DETAIL 1-A7.30 & SPEC. SECT. 10505.
 - 24" x 21" x 72" ATHLETIC LOCKERS WITH SLOPED TOPS. REFER TO DETAIL 3-A7.30 & SPEC. SECT. 10505.
- PROVIDE LOCKERS FOR THE PHYSICALLY CHALLENGED PER SPEC. SECTION 10500.

EQUIPMENT PLAN UNIT M1

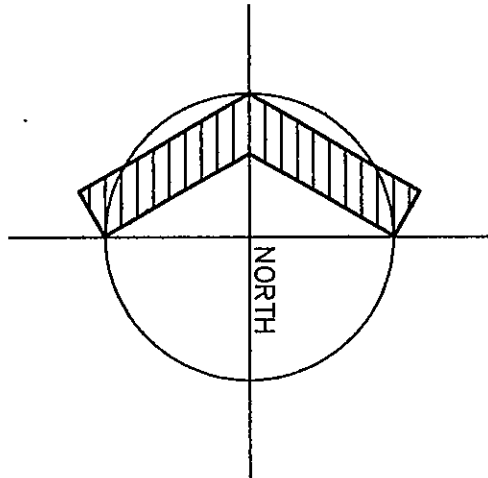

62-A-122

EQUIPMENT PLAN UNIT M1

DRAWN BY: LEC/SB COMM. NO.: 95067.00
CHECKED BY: JHU DATE: APRIL 21, 1997

A7.18

REVISIONS NO. DATE

Fanning/Howey Associates, Inc.
Architects Engineers Consultants

THE NEW CHESTERTON HIGH SCHOOL FOR THE DUNELAND SCHOOL CORPORATION CHESTERTON, INDIANA

COPYRIGHT 1997 BY FANNING/HOWEY ASSOCIATES, INC.

Professional Engineer Seal for James H. Howey, No. 12666, State of Indiana.

Professional Architect Seal for James H. Howey, No. 12666, State of Indiana.