GENERAL CEILING NOTES

1. ALTERNATE -- SLOPED CEILINGS, PROJECTION SURFACES AND LIGHTING SIMILAR TO DETAIL 3-A9.1 ARE TO BE PROVIDED UNDER AN ALTERNATIVE BID. TYPICAL AT CLASSROOM LOCATIONS UNLESS NOTED OTHERWISE. REFER TO ALTERNATIVES SPECIFICATION SECTION 01030.
2. UNDER THE BASE BID, PROVIDE LEVEL CEILING GRIDS AT 9'-4" A.F.F. WITHOUT SLOPED PROJECTION SURFACES IN CLASSROOMS. TYPICAL AT CLASSROOM LOCATIONS UNLESS NOTED OTHERWISE. ALSO REFER TO ALTERNATIVES SPECIFICATION SECTION 01030. REFER TO ELECTRICAL DRAWINGS FOR LIGHTING REQUIREMENTS.
3. PROVIDE A REVEAL DRYWALL TRIM AT ALL LOCATIONS WHERE GYPSUM WALLBOARD (GWB) ABUTS A DISSIMILAR MATERIAL. TYPICAL UNLESS NOTED OTHERWISE. REFER TO DETAIL 4-A9.1. REFER TO SPEC SECTION 09250.
4. PROVIDE A SHADOW MOLDING AT THE FULL PERIMETER OF ALL ACOUSTICAL CEILING TILE (ACT) CEILINGS. TYPICAL UNLESS NOTED OTHERWISE. REFER TO DETAIL 5-A9.1. REFER TO SPECIFICATION SECTION 09510.

ROOM LEGEND "E1"

ROOM NO.	ROOM NAME	AREA S.F.	CEILING HEIGHT
E101	CLASSROOM	996	11'-8"
E102	CLASSROOM	959	VARIES
E103	CLASSROOM	972	VARIES
E104	CLASSROOM	967	VARIES
E105	CLASSROOM	929	VARIES
E106	RECORDING ROOM	33	9'-4"
E107	CLASSROOM	934	VARIES
E108	RECORDING ROOM	33	9'-4"
E109	RECORDING ROOM	33	9'-4"
E110	CLASSROOM	929	VARIES
E111	CLASSROOM	929	VARIES
E112	RECORDING ROOM	33	9'-4"
E113	RECORDING ROOM	33	9'-4"
E114	CLASSROOM	934	VARIES
E115	CLASSROOM	921	VARIES
E116	RECORDING ROOM	35	9'-4"
E117	CLASSROOM	958	11'-8"
E118	RECORDING ROOM	35	9'-4"
E119	SCIENCE LAB	1512	VARIES
E120	PREP ROOM	200	9'-4"
E121	SCIENCE LAB	1437	VARIES
E122	SCIENCE LAB	1437	VARIES
E123	PREP ROOM	200	9'-4"
E124	SCIENCE LAB	1508	VARIES
E125	JANITOR	143	9'-4"
E126	FACULTY TOILET	177	9'-4"
E127	GIRLS TOILET	375	9'-4"
E128	ELEVATOR	79	9'-4"
E129	ELEVATOR EQUIPMENT	100	9'-4"
E130	BOYS TOILET	355	9'-4"
E131	FACULTY TOILET	177	9'-4"
E132	ELECTRICAL CLOSET	143	----
E133	DEPARTMENTAL PLANNING	717	9'-4"
E134	RESOURCE ROOM	1203	VARIES
E135	STORAGE	271	9'-4"
E136	STAIR	453	----
E137	ISL	1018	VARIES
E138	MULTI PURPOSE	1203	VARIES
E139	STORAGE	574	9'-4"
E140	CORRIDOR	2238	10'-0"
E141	CORRIDOR	1826	10'-0"
E142	CORRIDOR	977	10'-0"
E143	CORRIDOR	1803	10'-0"

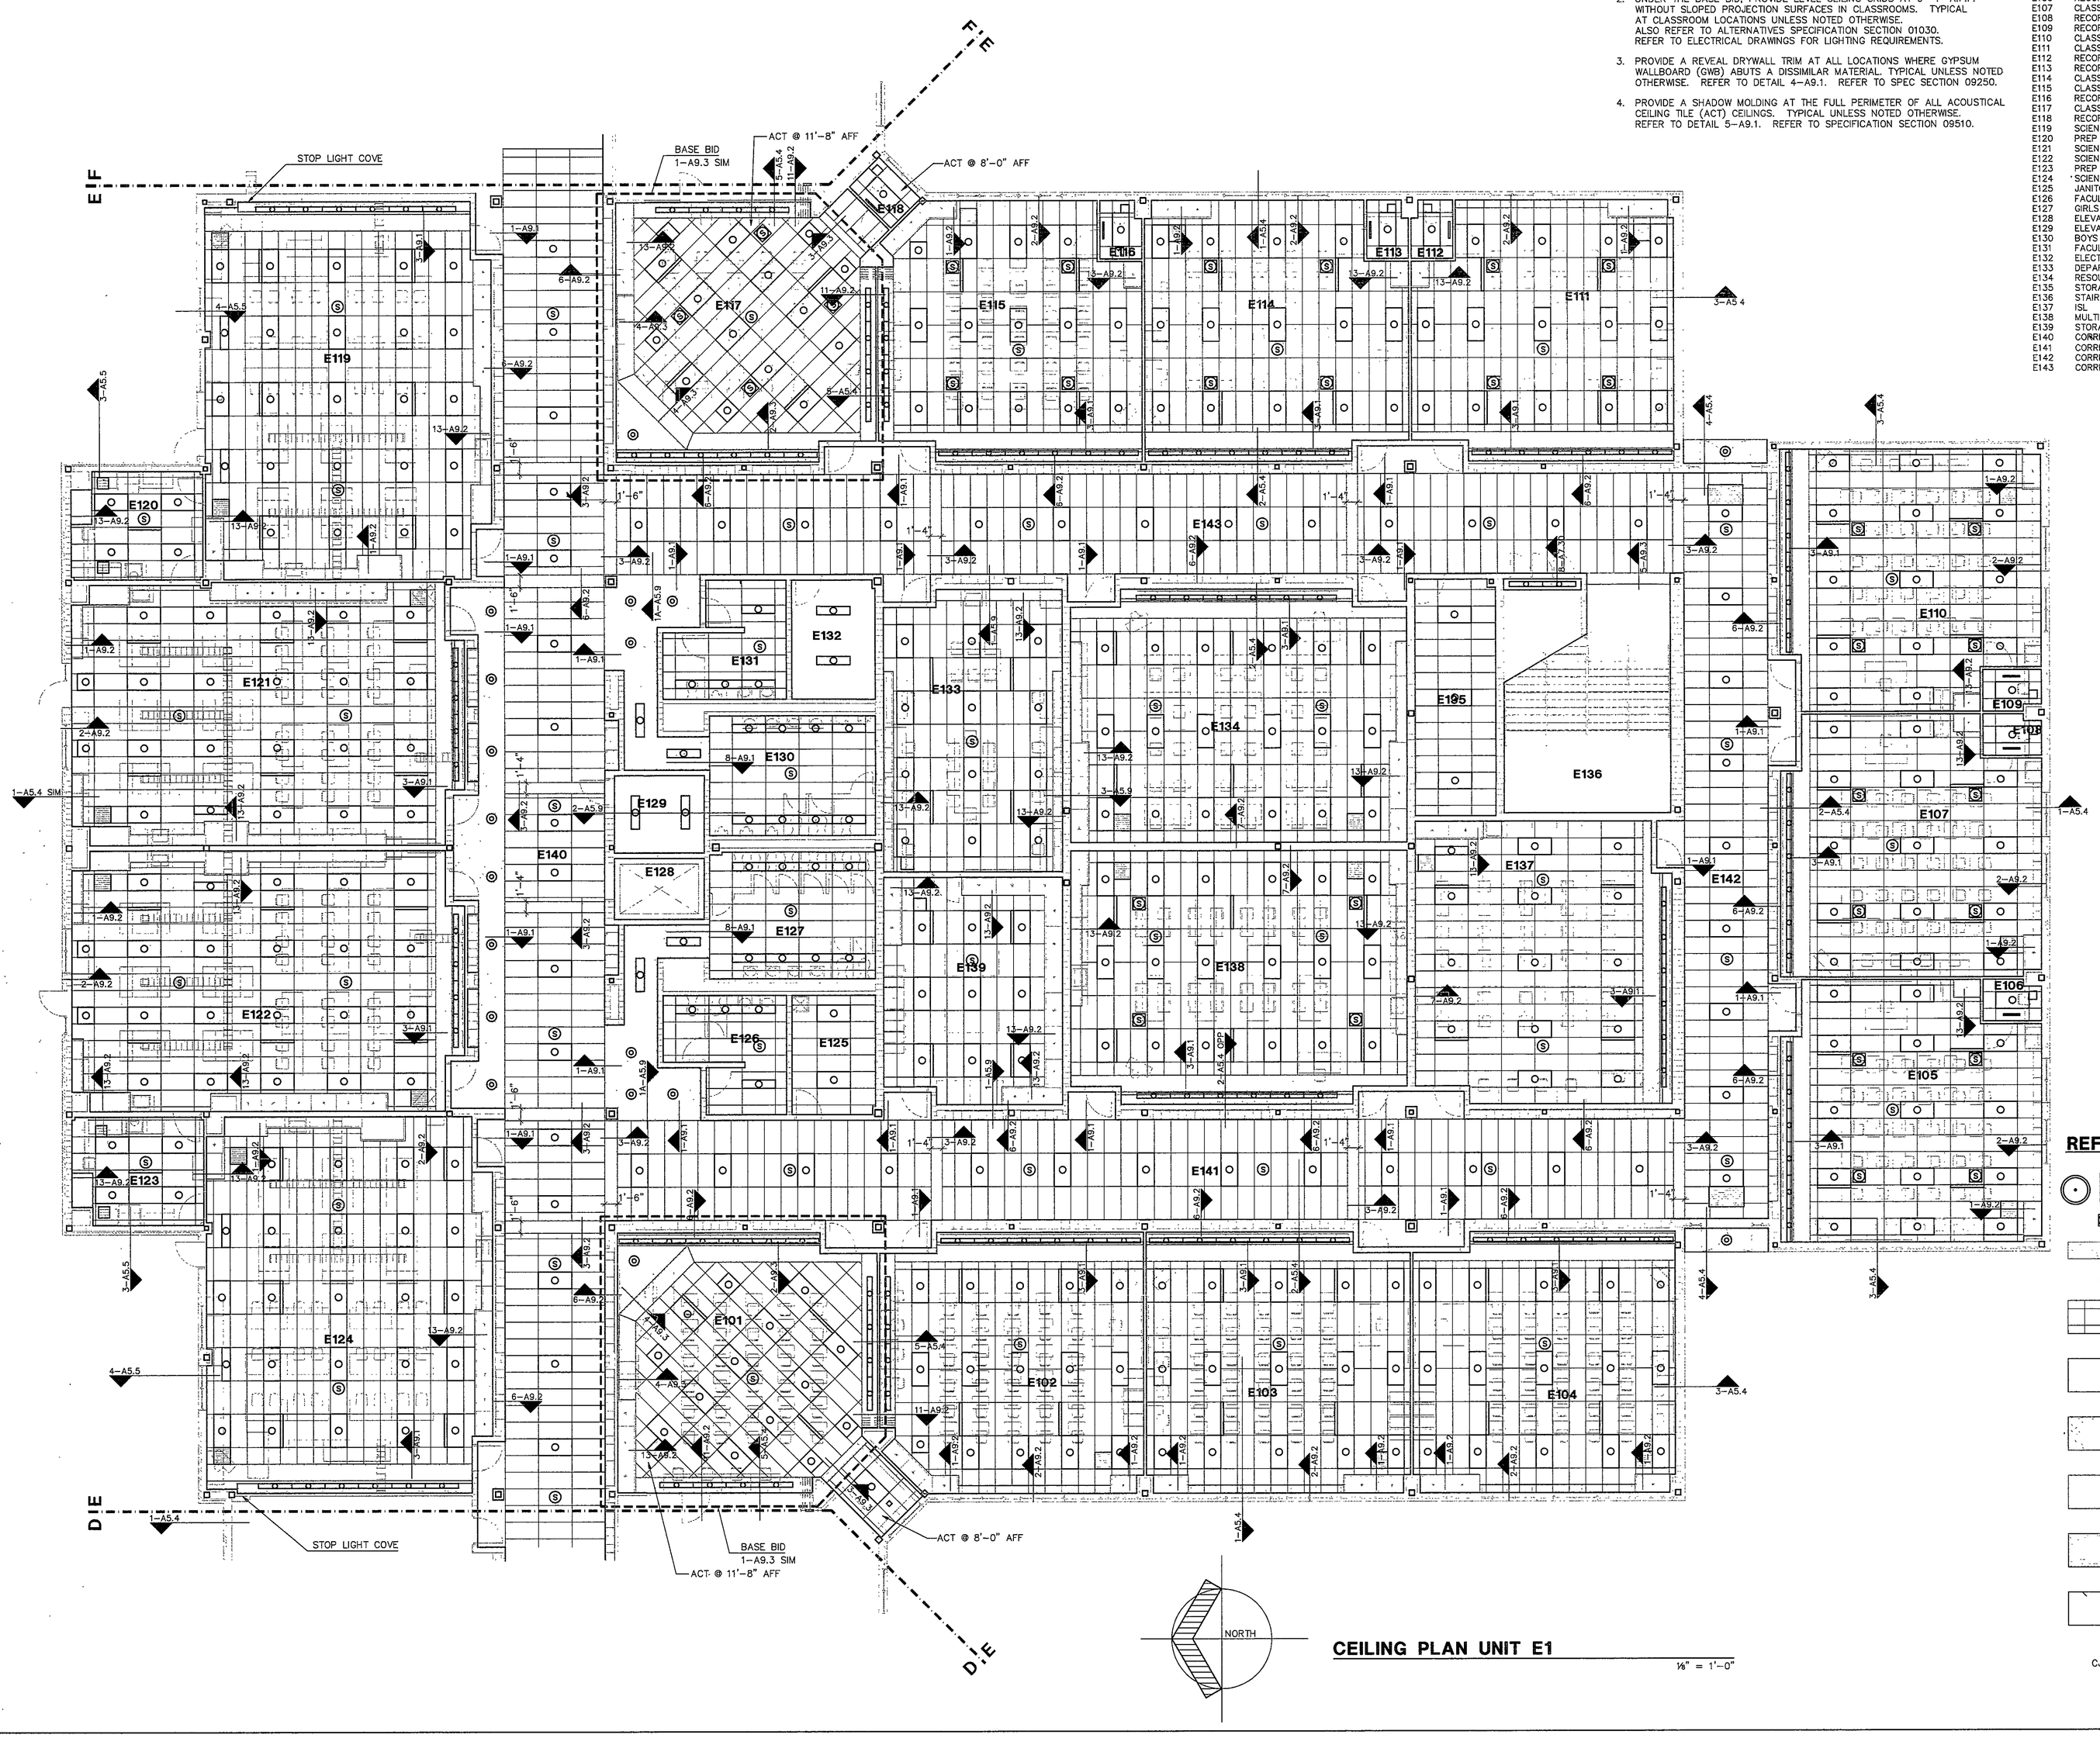

CEILING PLAN UNIT E1

1/8" = 1'-0"

REFLECTED CEILING PLAN LEGEND

- LIGHT FIXTURE – REFER TO ELECTRICAL
- SPEAKER – REFER TO ELECTRICAL
- LOUVER/GRILLE – REFER TO MECHANICAL
- SLOT DIFFUSER – REFER TO MECHANICAL
- ACOUSTICAL CEILING TILE (ACT) – REFER TO ROOM FINISH SCHEDULE FOR TYPES
- GYPSUM WALLBOARD (GWB)
- EXTERIOR INSULATION FINISH SYSTEM (EIFS)
- CEMENT PLASTER (PLAS)
- SPRAY-ON ACOUSTICAL INSULATION (SAI•) OVER GLASS FIBER REINFORCED GYPSUM UNITS
- PAINTED EXPOSED STRUCTURE (PES)
- CJ — CONTROL JOINT REFER TO DETAIL 12-A9.2

97-A-154

COPYRIGHT 1997 BY FANNING/HOWEY ASSOCIATES, INC.

DOUGLAS M. W. CASTLE REGISTERED ARCHITECT STATE OF INDIANA

LEE BROCKWAY REGISTERED ARCHITECT NO. 6866 STATE OF INDIANA

THE NEW
CHESTERTON HIGH SCHOOL
FOR THE
DUNELAND SCHOOL CORPORATION
CHESTERTON, INDIANA

Fanning/Howey Associates, Inc.
Architects Engineers Consultants

CEILING PLAN UNIT E1

DRAWN BY: GJE
CHECKED BY: JHJ
COMM. NO.: 95067.00
DATE: APRIL 21, 1997

REVISIONS NO. DATE

A9.8

CHESTERTON HIGH SCHOOL
95067.00