
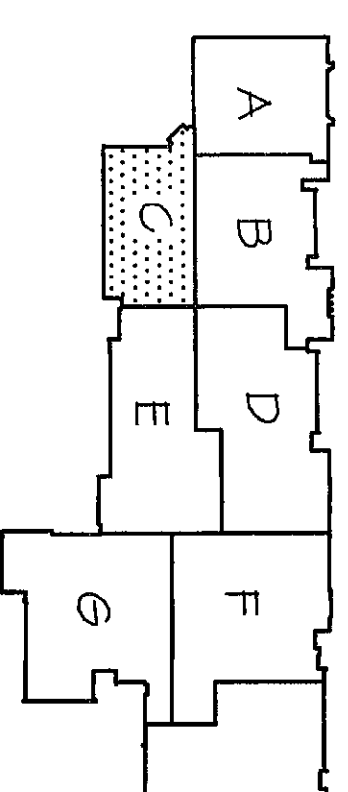
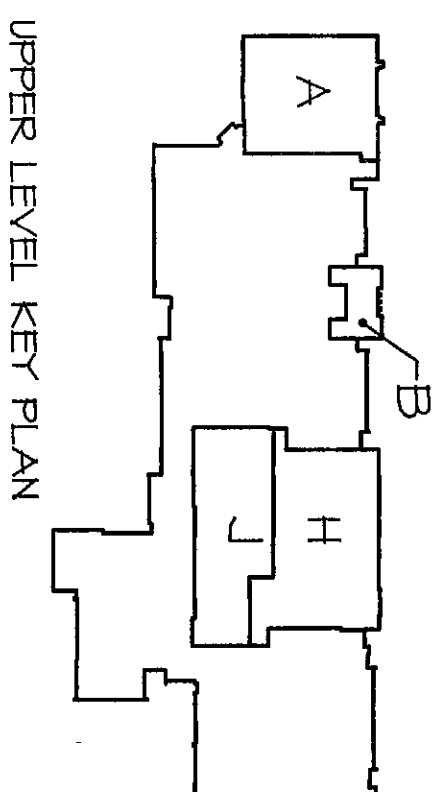


GENERAL REMOVAL NOTES:

1. PIPING INDICATED TO BE REMOVED AND REPLACED SHALL BE REMOVED UP TO ELBOW WHERE PIPING BRANCHES IN WALL OR NON-ACCESSIBLE CHASE.

REFERENCE NOTES:

1. REMOVE EXIST. PIPING AS INDICATED IN DASHED LINES. HANGERS MAY REMAIN FOR REUSE.
2. EXIST. GAS PIPING TO REMAIN.
3. REMOVE PIPING TO HERE.
4. REMOVE WATER PIPING UP TO HAZZANINE IN ITS ENTIRETY.
5. EXIST. WATER COOLERS TO REMAIN.
6. REMOVE WATER CLOSET SEAT AND FLUSH VALVE. SEE FINISH SCHEDULE FOR NEW.
7. EXIST. LAVATORY. NO WORK.
8. REMOVE ALL GALVANIZED WATER PIPING IN ACCESSIBLE CHASE AND REPLACE WITH NEW COPPER. SEE SHEET P-13.
9. SEE WATER SERVICE RISER PENAL ON SHEET P-13.
10. REMOVE EXIST. LAVATORY. REWORK ROOM-IN AS SCHEDULED.
11. REMOVE LAVATORY FOR TILE REWORK. REINSTALL WITH NEW FLOOR, TRAP, ETC. AS SCHEDULED.

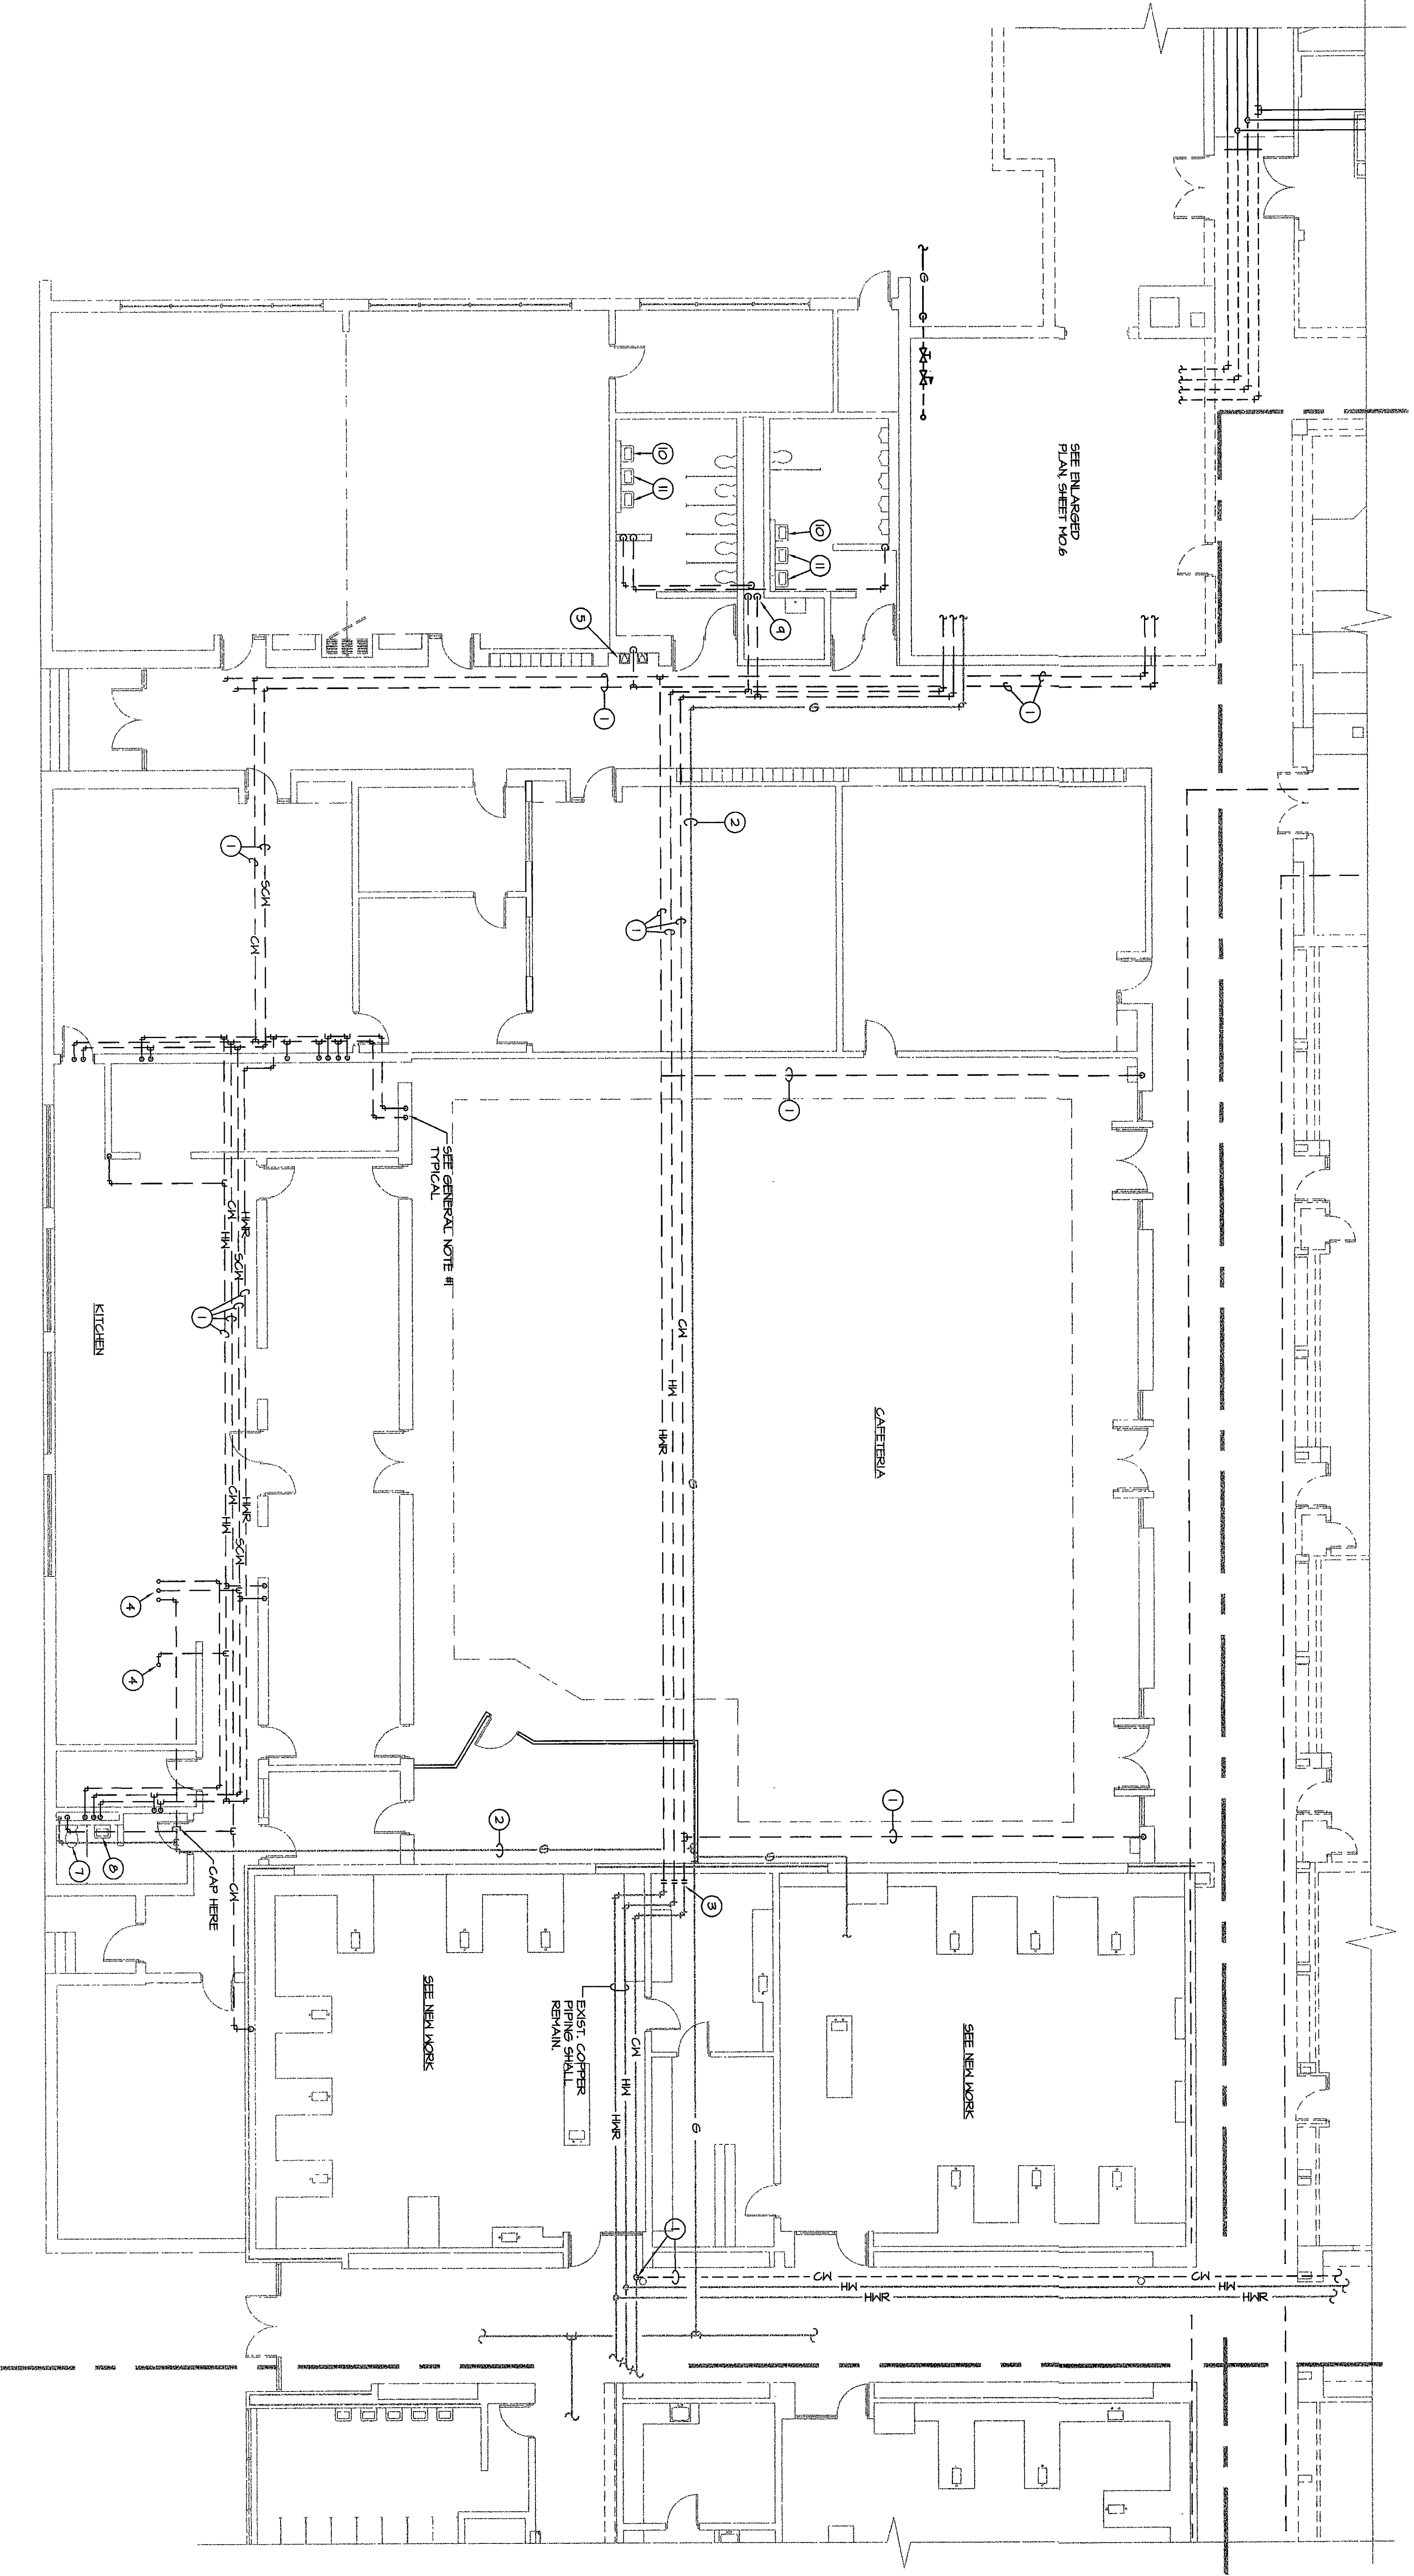

NORTH

SCALE: 1/8" = 1'-0"

VEAZEY
PARROTT
&
DURKIN
SHOULDERS

ARCHITECTS
ENGINEERS
PLANNERS

RENOVATION PROJECT FOR:
DUNELAND SCHOOL
CORPORATION
CHESTERTON MIDDLE SCHOOL
CHESTERTON, INDIANA

Drawing Title:
DEMOLITION PLAN - UNIT C

Project No.	94B000
Drawn By:	RLM
Approved By:	KLF
Drawing No.	P 0.3

2000-P-03