

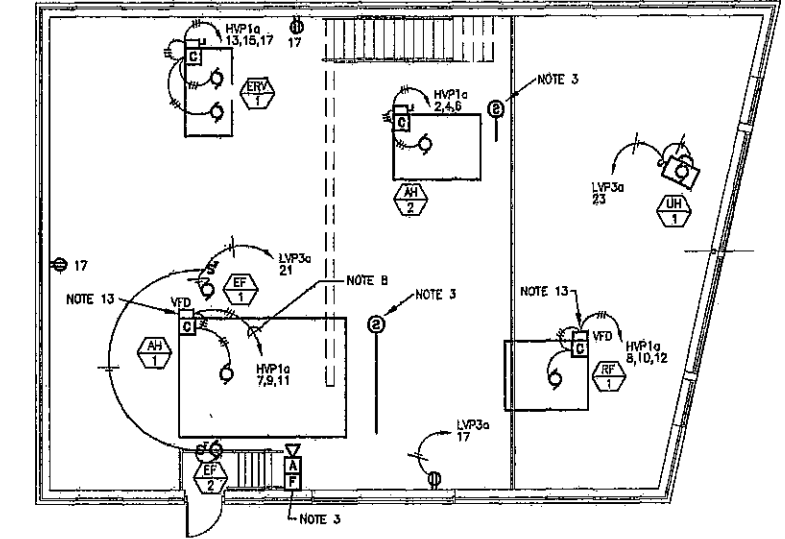


REVISIONS	BY

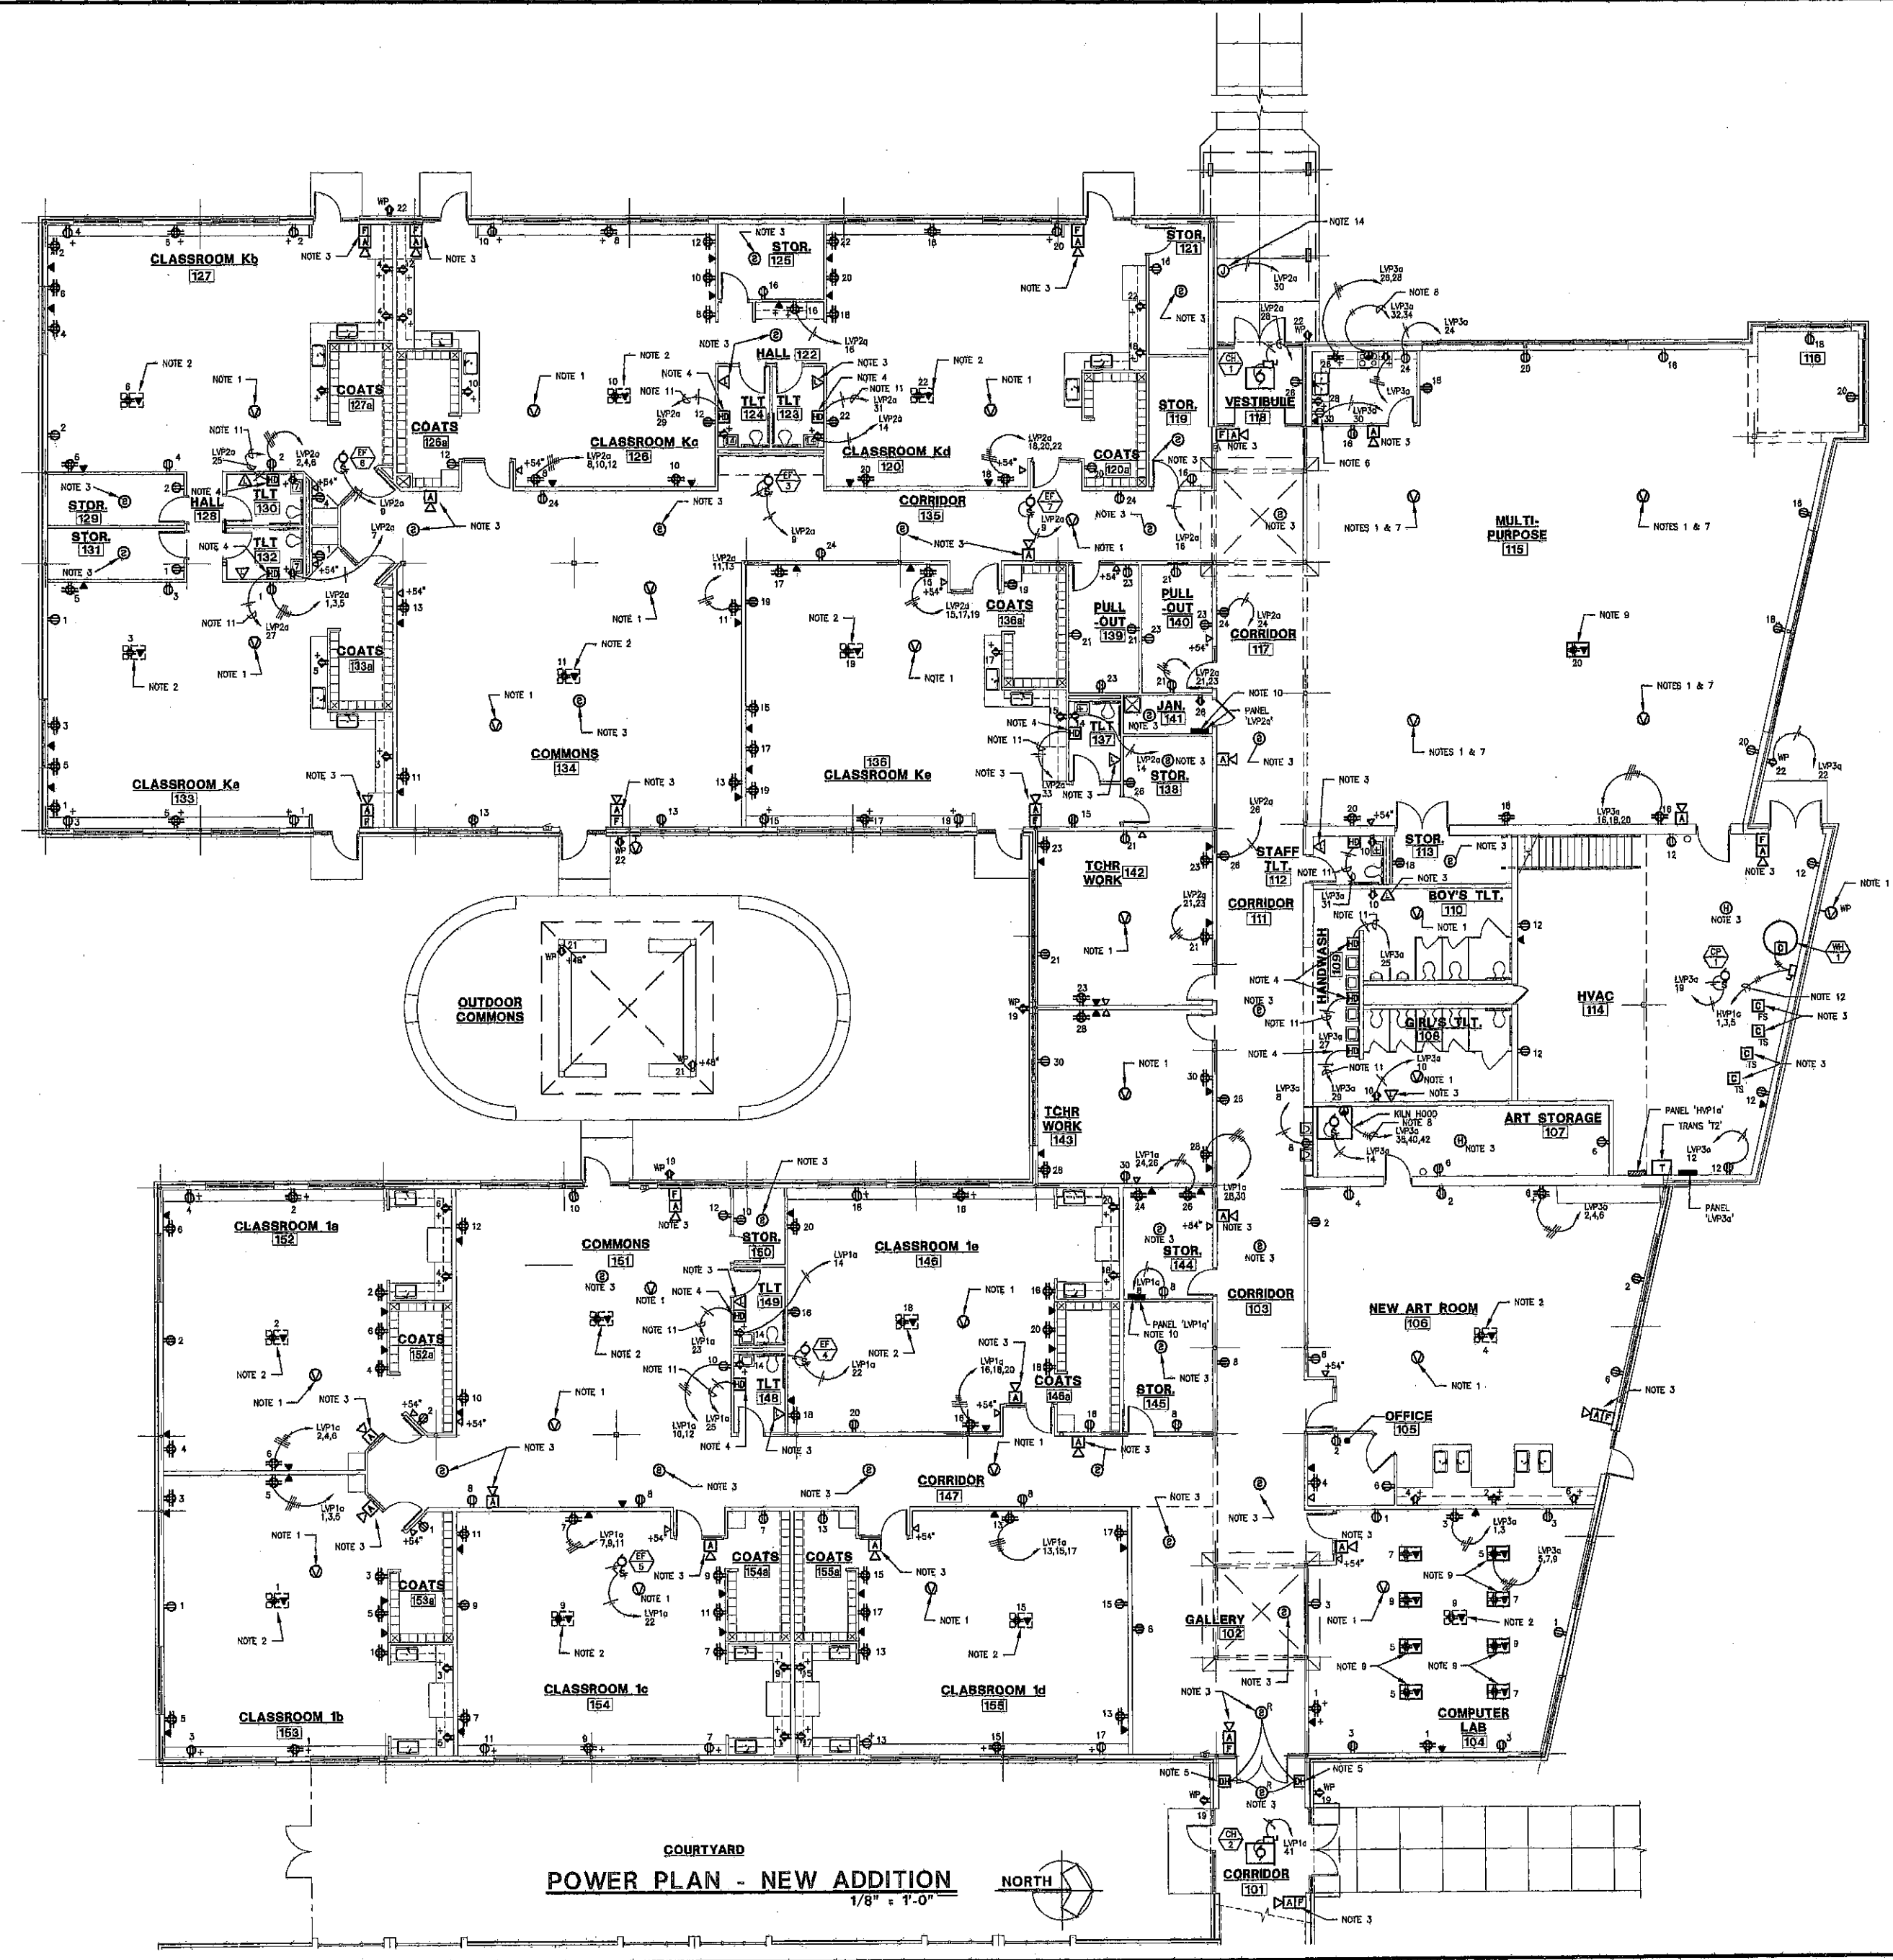

MEZZANINE POWER PLAN
1/8" = 1'-0"

- PLAN NOTES:
1. CONNECT NEW SPEAKER TO EXISTING PA SYSTEM. COORDINATE ALL REQUIREMENTS WITH EXISTING PA SYSTEM. PROVIDE EXPANSION OF EXISTING SYSTEM AS REQUIRED FOR ADDITIONAL SPEAKERS AND ZONES.
 2. COORDINATE EXACT LOCATION OF CEILING MOUNTED RECEPTACLE/OUTLET WITH LIGHT FIXTURES, GRILLES AND DIFFUSERS, AND WITH OWNER PRIOR TO ROUGH-IN.
 3. CONNECT NEW FIRE ALARM DEVICE TO EXISTING FIRE ALARM SYSTEM. PROVIDE ALL EXPANSION BATTERIES IN EXISTING FIRE ALARM CONTROL PANEL AS REQUIRED. INCLUDE ALL REPROGRAMMING OF EXISTING SYSTEM AS REQUIRED. RECALCULATE BATTERY BACKUP REQUIREMENTS AND PROVIDE ADDITIONAL BATTERIES IF REQUIRED.
 4. COORDINATE HAND DRYER LOCATION WITH ARCHITECT PRIOR TO ROUGH-IN.
 5. DOOR HOLDS TO BE CONNECTED TO EXISTING FIRE ALARM CONTROL PANEL. PROVIDE PROGRAMMING SUCH THAT THIS DEVICE WILL BE CLOSE IF SMOKE DETECTORS WITHIN 50' OF DOORS GO INTO ALARM.
 6. RECEPTACLE AND DATA OUTLET TO BE LOCATED IN CABINET. COORDINATE EXACT LOCATION WITH ARCHITECT PRIOR TO ROUGH-IN.
 7. PROVIDE SPEAKER WITH ENCLOSEURE.
 8. COORDINATE EXACT LOCATION OF FLOOR BOX WITH OWNER PRIOR TO SLAB POUR.
 9. COORDINATE EXACT LOCATION OF FLOOR BOX WITH OWNER PRIOR TO SLAB POUR.
 10. FEED PANEL FROM BELOW. ROUTE CONDUIT UNDER SLAB. COORDINATE ROUTING WITH OTHER TRADES.
 11. (3/16) #100, IN 3/4" C.
 12. (3/16) #100, IN 3/4" C.
 13. WFO BY OTHERS. CONNECTED BY E.C.
 14. PROVIDE 5W/FT HEAT TRACE ON ROOF DRAIN. HEAT TRACE TO BE COMPLETE WITH ALL REQUIRED CONTROLS AND APPURTENANCES. HEAT TRACE TO BE EASY HEAT TRS181 WITH THERMOSTATIC CONTROL.



POWER PLANS - NEW ADDITION
LIBERTY ELEMENTARY SCHOOL
EARLY LEARNING CENTER ADDITION & REMODEL
CHESTERTON, INDIANA
gerometa & khel architects, inc.

