


1 PARTIAL FIRST FLOOR PLAN - PLUMBING DEMOLITION
1/4" = 1'-0"

SHEET NOTES

1. REMOVE EXISTING ALL ASSOCIATED HOT/COLD WATER, SANITARY AND VENT PIPING COMPLETE AS REQUIRED WHERE SCIENCE CASEWORK HAS BEEN REMOVED
2. REMOVE EXISTING (ABOVE CEILING AND AND IN FLOOR SLAB) COLD HOT WATER PIPING, VENT AND SANITARY PIPING SERVING EXISTING FIXTURES IN THIS ROOM. PROVIDE ANY ADDITIONAL PIPING ON EXISTING MAINS TO MAINTAIN CONTINUITY TO OTHER PIPING BRANCHES BEING SERVED BY EXISTING PIPE MAINS. VERIFY ALL REQUIREMENTS IN FIELD COMPLETE AS REQUIRED
3. REMOVE EXISTING VENT THRU ROOF AND PATCH ROOF COMPLETE AS REQUIRED

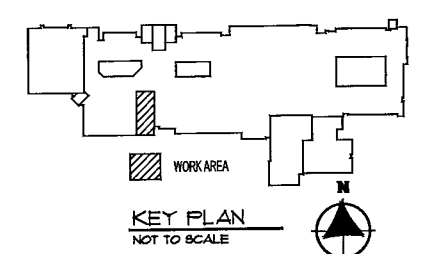

TRIA
ARCHITECTURE

REP. ENGINEER
(P) 733/3466
(P) 733/3467

Miss Engineering Group
1000 N. 10th St.
Chesterton, IN 46304

DUNELAND SCHOOL CORPORATION
2017 SCIENCE LAB RENOVATIONS AT:
CHESTERTON MIDDLE SCHOOL
651 W. MORGAN AVENUE, CHESTERTON, INDIANA 46304

REV. NO.	PROJECT NUMBER	PROJECT NAME	DATE	BY	CHECKED	APPROVED	REASON
1	2017-001	2017 SCIENCE LAB RENOVATIONS AT CHESTERTON MIDDLE SCHOOL	08/15/2017	J. B. B.	J. B. B.	J. B. B.	ISSUED FOR BID AND PERMIT. TID

PARTIAL FIRST FLOOR PLAN - PLUMBING DEMOLITION

P0.10