CHESTERTON HIGH SCHOOL PAINTING / WALLCOVERING NOTES

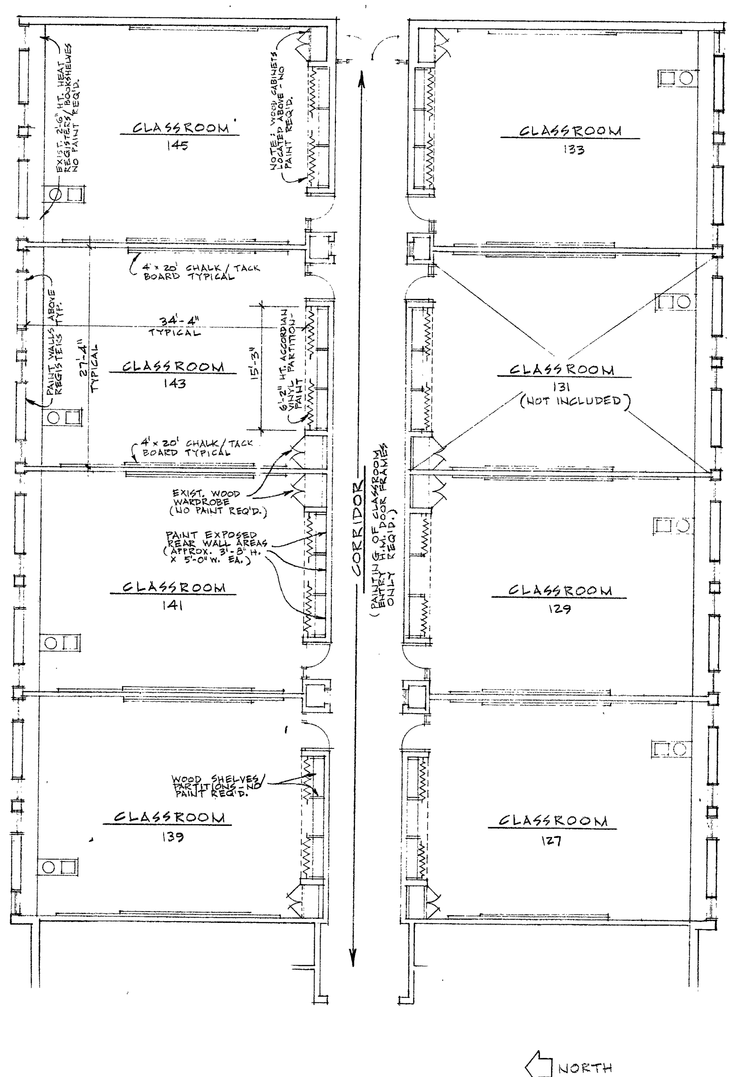

BAILLY ELEM. AREA 'A'

8'-0" CLG. HT. 3/32" = 1'-0"

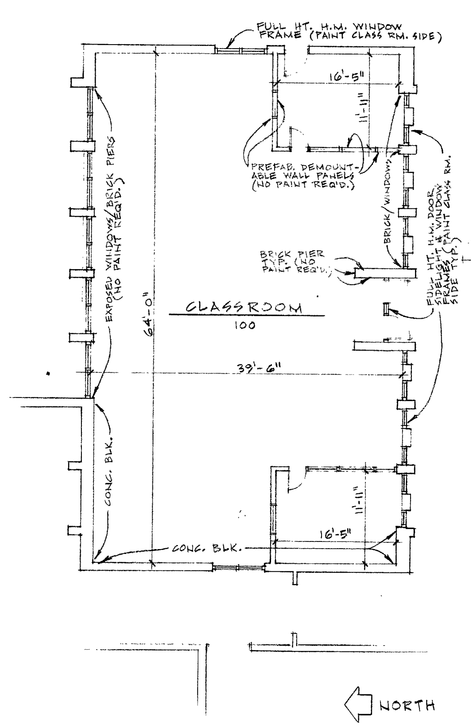

BAILLY ELEM. AREA 'B'

8'-0" CLG. HT. 3/32" = 1'-0"

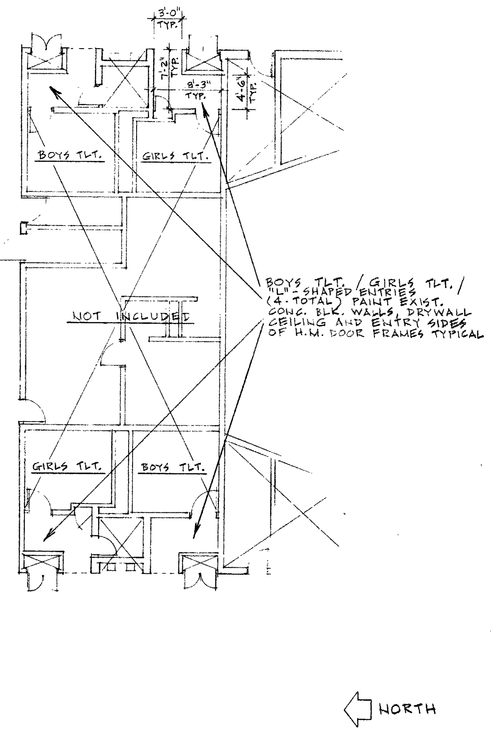

BAILLY ELEM. AREA 'C'

8'-0" CLG. HT. 3/32" = 1'-0"

CHESTERTON HIGH SCHOOL PAINTING/WALLCOVERING NOTES

CEILING NOTES:
Unless noted otherwise, existing suspended acoustical tile ceilings are to remain typical and no ceiling painting work will be required.

a. New suspended acoustical tile ceiling being installed Summer 1991 under separate contract to Owner (at 9'-0" height).

b. All existing acoustical ceiling tile being replaced Summer 1991 this entire corridor under separate contract with Owner. Painting Contractor is to spray paint all existing ceiling grid members (2 x 2 grid pattern existing) in "OFF-WHITE" color.

c. Enamel paint exposed concrete ribbed ceiling. Concrete ribs are approximately 5" wide x 10" deep and are spaced 24" o.c. Bottom of ribs is at approximately 8'-0" height. Ribbed ceiling to be painted same base color as walls that are also being painted. All existing ceiling items, including exposed duct-work, piping, conduit, beams etc. are to be painted same color as ceiling.

d. Enamel paint (Off-White color) existing plaster ceiling and existing exposed tapered concrete ceiling beams.

e. Enamel paint (Off-White color) existing plaster ceiling. Scrape/sand any existing peeling ceiling paint and spot prime prior to applying enamel ceiling paint. (Paint to be type suitable for high moisture shower area).

f. Sand and prime and paint metal wall trim @ edges of exist. rusted susp. ceiling grid just outside of Girls P.E. Swim Shower area.

WALL NOTES:
A. Existing vinyl wall fabric over masonry/stud-drywall walls. Apply 2 coats enamel paint over existing vinyl surface. Fill/patch any misc. holes prior to painting. Reglue any loose seams encountered prior to painting.

B. Same as Wall Note 'A', except note specific areas on Room Drawing Plan where significant vinyl repair required.

C. Strip existing vinyl wall fabric from all walls this room, prime and prepare walls for new vinyl and install new heavy-duty vinyl wall fabric.

D. Same as Wall Note 'A', except, clean plaster splatters (from Art Pottery Work) from existing vinyl wall fabric and apply 2 coats epoxy enamel paint over existing vinyl wall fabric.

E. Prime existing unfinished homasote wall surface (above existing 4'-4" ht. wood panel wainscott) and apply heavy duty vinyl wall fabric.

F. Sand/fill existing painted plywood walls (@ panel joints primarily), spot prime as necessary and install heavy duty vinyl wall fabric.

G. Epoxy paint existing painted concrete block walls full height and splatter-apply 2 contrasting epoxy paint colors for "speckled" accent appearance.

H. Apply 2 coats enamel paint to existing painted block walls full height.

I. Apply 2 coats enamel paint to exposed area (2'-0" to 3'-0" high) of existing painted concrete block. Lower 7 ft. high portion of wall is glazed block and requires no painting.

J. Existing 7 ft. high glazed block partition walls require no painting.

K. Paint existing vinyl wall fabric covered (or painted) soffits above existing wood cabinets/wardrobes etc. with 2 coats enamel paint.

L. Paint existing painted drywall/plaster walls full height with 2 coats enamel paint. Fill/patch misc. holes, gouges, defects in existing walls, sand smooth and spot prime as required prior to painting.

M. Full height glazed block or ceramic tiled walls - no painting required.

N. Patch existing damaged plaster wall areas as required for smooth even surface. Prime wall. Apply heavy duty vinyl wall fabric.

O. See specific Painting/Staining Notes on Cafeteria Area Floor Plan, Drwg. Sht. PW-2.

P. See specific Painting Notes on Troy Field Press Box, Drwg. Sht. PW-2.

Q. Existing O.H. braced metal toilet partitions being replaced this room Summer '91 under separate contracto to Owner (or previously replaced).

R. Apply 2 coats enamel to existing O.H. braced metal toilet partitions and urinal screens this room. Wire brush and spot prime any rust areas w/rust-inhibitive paint prior to painting.

S. Paint narrow 4" wide strip of wall below exterior windows (above heater cabinets). Scrape and prime prior to final paint coat.

LOCKER NOTES:
* Electrostatic spray paint fronts of recessed metal corridor locker banks as shown on Dtl. 4/PW-2.

** Electrostatic spray paint all exposed interior and exterior surfaces of Pool Locker Rm. freestanding metal lockers as shown on Dtl. 3/PW-2.

*** Electrostatic spray paint all exposed exterior surfaces of freestanding metal corridor locker banks and install painted plywood tops over sloped top areas of locker banks as shown on Dtl. 2/PW-2.

DOOR/FRAME NOTES:
1. Paint room side of existing H.M. (or wood) door/sidelite/transom frames typical (doors are stained wood and require no finish).

2. Paint corridor side of existing H.M. doors/sidelites/transom frames typical (doors are stained wood and require no finish).

3. Paint H.M. interior window lite frames.

4. Existing exterior aluminum window areas - no finish required.

5. Repaint existing wood doors and frames w/2 coats enamel paint, (or stain where indicated).

6. Paint existing H.M. door frames (existing wood doors throughout this room being replaced with new all-aluminum doors Summer '91 under separate contract to Owner).

7. Existing aluminum doors and frames where called out - no painting necessary.

BAILLY ELEMENTARY SCHOOL PAINTING/WALLCOVERING NOTES:

CEILING NOTES:
Existing suspended acoustical tile ceilings to remain typical. No work required. Except, existing painted plaster ceilings @ Area 'C' Boys/Girls Tlt. Rm. Entries to be painted with one coat white ceiling enamel.

WALL NOTES:
A. Existing vinyl wall fabric over masonry/stud-drywall walls. Apply 2 coats enamel paint over existing vinyl surface. Fill/patch any misc. holes prior to painting. Reglue any loose seams encountered prior to painting.

B. Paint existing vinyl-faced closet accordian partitions (both sides) w/2 coats enamel paint.

C. Paint existing full height painted concrete block walls w/2 coats enamel paint.

D. Paint rear wall areas of closets w/2 coats enamel paint.

E. No painting work @ exposed face brick wall/pier areas.

DOOR/FRAME NOTES:
1. Paint Room side of existing H.M. door/sidelite frames typical (Doors are stained wood and require no finish).

2. Existing aluminum entry doors, frames, transoms & sidelites - no finish required. (Located @ End of Corridor).

3. Existing exterior aluminum window areas - no finish required.

4. Paint corridor side of all H.M. door frames typical. (Doors are stained wood and require no finish).

5. Prefab demountable wall panels require no finish.

6. Paint Room side of full height H.M. interior window frames.

BAILLY ELEMENTARY SCHOOL PAINTING/WALLCOVERING ROOM SCHEDULE

AREA 'A'

CLASSROOM 127
CLASSROOM 129
CLASSROOM 133
CLASSROOM 139
CLASSROOM 141
CLASSROOM 143
CLASSROOM 145
Walls: A, B, D
Frames: 1, 3

CLASSROOM 131
No Work Required

CORRIDOR
Walls: No work req'd.
Frames: 2, 4

AREA 'B'

CLASSROOM 100
Walls: A, C, E
Frames: 1, 3, 5, 6

AREA 'C'

BOYS/GIRLS TLT. RM. ENTRIES
(4 Entries Total)
Walls: C
Frames: 1
Ceilings: Exist. plaster, paint.

MISC:

GUIDANCE 106
CLASSROOM 105
CLASSROOM 107
CLASSROOM 109
KINDERGARTEN 111
KINDERGARTEN 113
MUSIC 117
ART 115
Walls: No work req'd.
Frames: 1, 4 (Classroom Entry Doorways)

EXTERIOR PERIMETER WOOD BUILDING SOFFITS
Wire brush/scrape loose paint; spot prime as req'd and apply heavy-duty coat exterior white soffit enamel paint.

CHESTERTON HIGH SCHOOL PAINTING/WALLCOVERING ROOM SCHEDULE:
(Also, see various Room Floor Plans, Drwg. Shts. PW-1 & PW-2 for additional specific notes)

FIRST FLOOR AREAS:

SEMINAR D141-5
SEMINAR D141-3
Walls: C
Frames: 1, 3,

BOYS RESTROOM R4
GIRLS RESTROOM R3
Ceiling: c
Walls: G, Q
Frames: 1

INDUSTRIAL ARTS CORRIDOR
Ceiling: b
Walls: G
Frames: 2

MAIN BOYS RESTROOM
MAIN GIRLS RESTROOM
Ceiling: d
Walls: I, Q
Frames: none

MAIN OFFICE CENTER LOBBY
Lockers: ***

GUIDANCE CORRIDOR
Lockers: *

MAIN E/W BLDG. CORRIDOR
Lockers: *, ***

SPEECH/DEBATE CORRIDOR
Lockers: *

ART/MUSIC CORRIDOR
Lockers: *

POOL CORRIDOR
Lockers: ***

SWIM TEAM AREA:

LOCKER ROOM
Ceiling: a
Walls: I, J
Frames: 6
Lockers: ** (Alt. Bid)

OFFICE
Walls: H
Frames: 6

TOILET RM.
Walls: I, J, R
Frames: none

HALLWAY
Walls: I, J
Frames 6, 7

SHOWER RM.
Ceiling: e
Walls: M, J
Frames: 6

GIRLS P.E. SWIM AREA:

LOCKER ROOM
Ceiling: f
Walls: I, J
Frames: 6
Lockers: **

OFFICE
Walls: H
Frames: 6, 7

TOILET RM.
Walls: I, J, R
Frames: none

SHOWER RM.
Ceiling: e
Walls: M, J
Frames: 7

ENTRANCE 7 LOBBY
W Wall: N
N, S & E Walls: no work req'd.

ENTRANCE 7 W. CORRIDOR
E Wall: C
N, S & W Walls: no work req'd.
Frames: 2

SPEECH/DEBATE AREA:

CLASSROOM E152
S Wall: F
N, W & E Walls: A
Frames: 1 (also see specific notes on room plan)

CLASSROOM E152S
N Wall: F
S Wall: S
W Wall: L
E Wall: A
Frames: 1, 4

CLASSROOM E152N
N Wall: F
S Wall: S
W Wall: A
E Wall: L
Frames: 1, 4

CLASSROOM E150
Walls: B
Frames: 1

CAFETERIA A173
Walls: O
Frames: 1, 5 (stain)

BOYS P.E. SWIM AREA

LOCKER ROOM
Ceiling: a
Walls: I, J
Frames: 6
Lockers: **

OFFICE
Walls: H
Frames: 6, 7

TOILET RM.
Ceiling: a
Walls: I, J, Q
Frames: none

SHOWER ROOM
Ceiling: e
Walls: M, J
Frames: 7

ART ROOM C130-5
N Wall: E
S, E Walls: D
W Wall: A, K
Frames: 1, 5

PHOTO LAB C130
N Wall: A, K
S Wall: E
E Wall: D
W Wall: A, K
Frames: 1, 5

SPECIAL SERVING RM. A173-1
Walls: O
Frames: 1, 5 (stain)

SECOND FLOOR AREAS:

BOYS RESTROOM R19
GIRLS RESTROOM R20
Ceiling: c
Walls: G, R
Frame#: 1

CORRIDOR 'A'
Locker: *, ***

CORRIDOR 'B'
Lockers: *

CORRIDOR 'C'
CORRIDOR 'D'
CORRIDOR 'E'
Lockers: * (Alt. Bid)

TROY FIELD PRESS BOX
Walls: P. (interior & exterior)

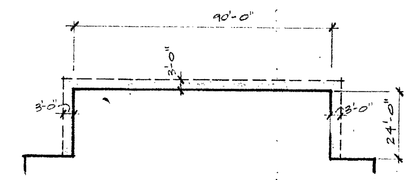

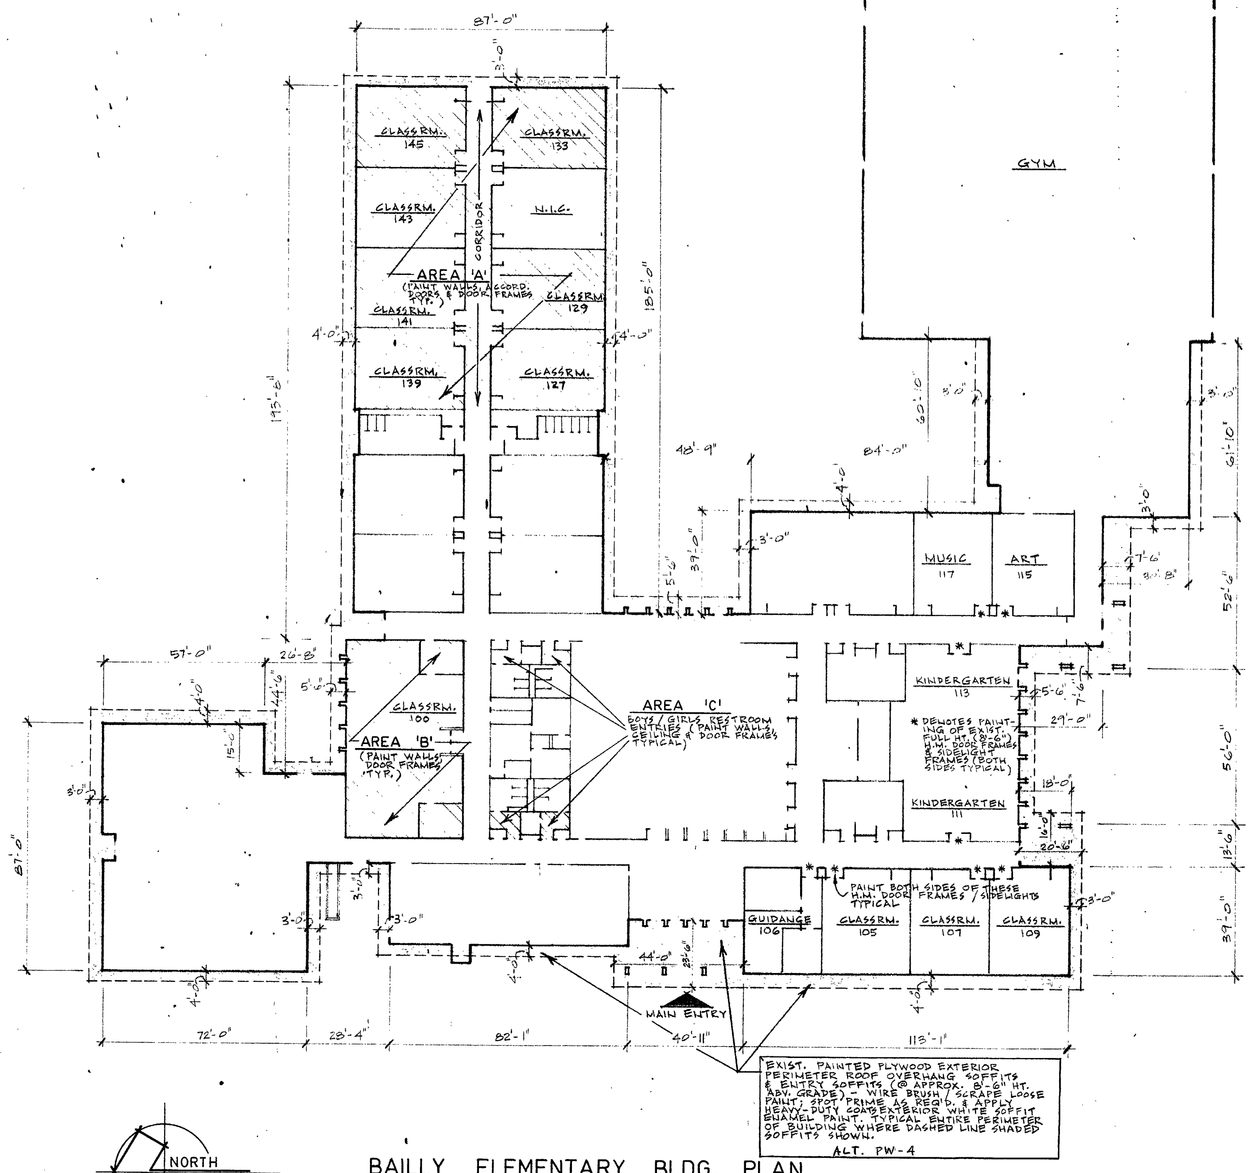

BAILLY ELEMENTARY BLDG. PLAN

INTERIOR PAINTING AREAS 'A', 'B', 'C' 1" = 30'

REVISIONS	BY

BoES PAINTING / WALLCOVERING PLANS
SUMMER 1991 INTERIOR RENOVATION PROJECTS
DUNELAND SCHOOL CORPORATION chesterton, indiana
gerometta & kinel architects, inc. chesterton, indiana

DATE	2/15/91
SCALE	AS NOTED
DRAWN	R.B.
JOB	9107
SHEET	PW-3
OF 15 SHEETS	

PAINTING & WALLCOVERING

DATAPRINT CORP. 700 SO. CLAREMONT ST. SAN MATEO, CA. 94401

STOCKCRAFTING FORM NO. 101-56