


PLOTTED BY: JESSY ARNOLD DATE PLOTTED: 3/5/2019 7:15 AM FILE PATH AND NAME: P:\13-B-2-Jackson Elementary\13-B-2 - FP110A

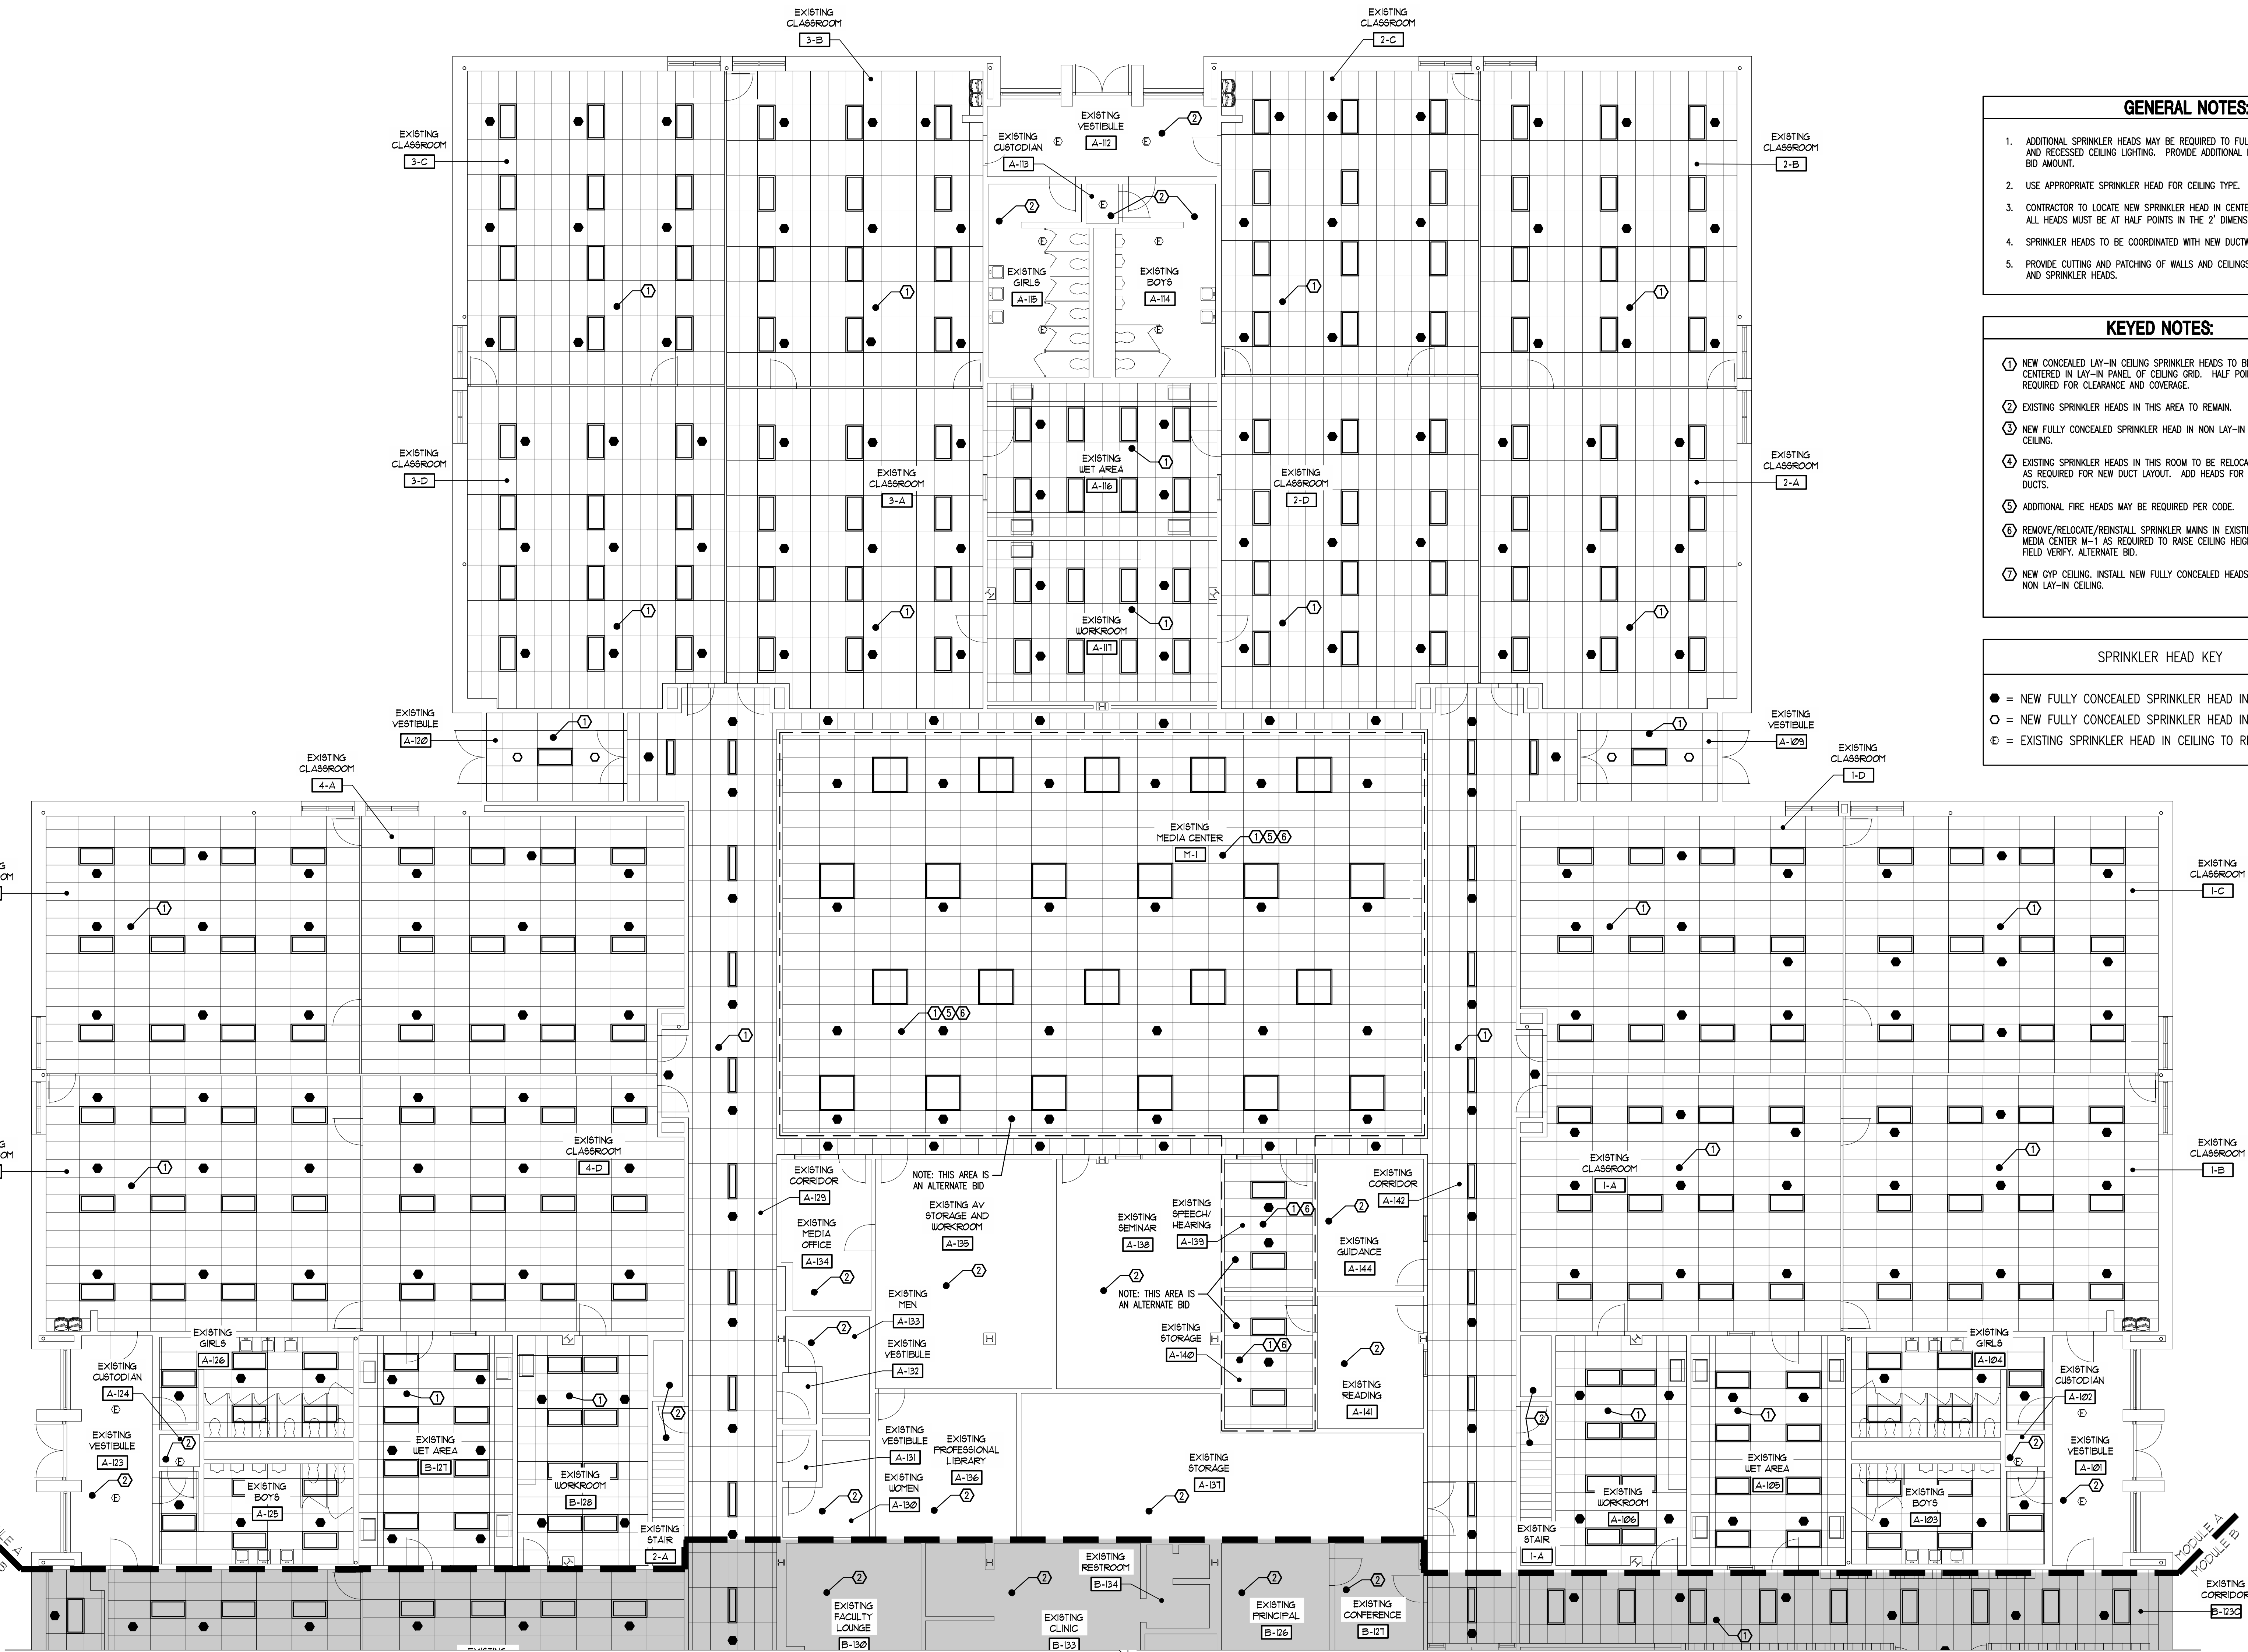

GENERAL NOTES:


1. ADDITIONAL SPRINKLER HEADS MAY BE REQUIRED TO FULLY PROTECT DUE TO SOFFITS AND RECESSED CEILING LIGHTING. PROVIDE ADDITIONAL HEADS WHERE REQUIRED UNDER BID AMOUNT.
2. USE APPROPRIATE SPRINKLER HEAD FOR CEILING TYPE.
3. CONTRACTOR TO LOCATE NEW SPRINKLER HEAD IN CENTER OF TILE WHEREVER POSSIBLE. ALL HEADS MUST BE AT HALF POINTS IN THE 2' DIMENSION AS A MINIMUM.
4. SPRINKLER HEADS TO BE COORDINATED WITH NEW DUCTWORK AND LIGHTING.
5. PROVIDE CUTTING AND PATCHING OF WALLS AND CEILINGS AS NEEDED TO INSTALL PIPING AND SPRINKLER HEADS.

KEYED NOTES:

- ① NEW CONCEALED LAY-IN CEILING SPRINKLER HEADS TO BE CENTERED IN LAY-IN PANEL OF CEILING GRID. HALF POINTS AS REQUIRED FOR CLEARANCE AND COVERAGE.
- ② EXISTING SPRINKLER HEADS IN THIS AREA TO REMAIN.
- ③ NEW FULLY CONCEALED SPRINKLER HEAD IN NON LAY-IN CEILING.
- ④ EXISTING SPRINKLER HEADS IN THIS ROOM TO BE RELOCATED AS REQUIRED FOR NEW DUCT LAYOUT. ADD HEADS FOR BELOW DUCTS.
- ⑤ ADDITIONAL FIRE HEADS MAY BE REQUIRED PER CODE.
- ⑥ REMOVE/RELOCATE/REINSTALL SPRINKLER MAINS IN EXISTING MEDIA CENTER M-1 AS REQUIRED TO RAISE CEILING HEIGHT. FIELD VERIFY. ALTERNATE BID.
- ⑦ NEW GYP CEILING. INSTALL NEW FULLY CONCEALED HEADS FOR NON LAY-IN CEILING.

SPRINKLER HEAD KEY

- = NEW FULLY CONCEALED SPRINKLER HEAD IN LAY-IN CEILING.
- = NEW FULLY CONCEALED SPRINKLER HEAD IN NON LAY-IN CEILING.
- ⦿ = EXISTING SPRINKLER HEAD IN CEILING TO REMAIN.

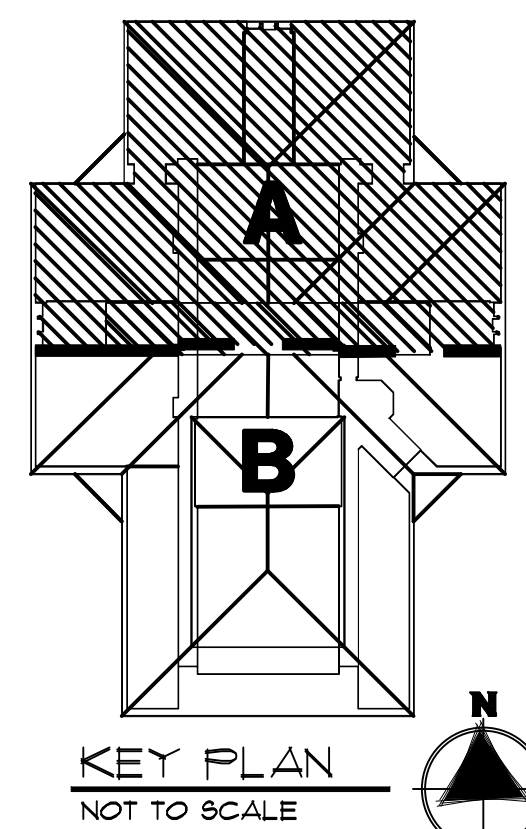

KEY PLAN
NOT TO SCALE



REVISIONS	PROJECT NUMBER	DATE	BY	APP'D
1	13-B-2	03/05/2019	JAR	
2	13-B-2	03/05/2019	JAR	
3	13-B-2	03/05/2019	JAR	
4	13-B-2	03/05/2019	JAR	
5	13-B-2	03/05/2019	JAR	
6	13-B-2	03/05/2019	JAR	
7	13-B-2	03/05/2019	JAR	
8	13-B-2	03/05/2019	JAR	
9	13-B-2	03/05/2019	JAR	
10	13-B-2	03/05/2019	JAR	

