

IEXISTING REFLECTED CEILING PLAN REFERENCED NOTES

- EXISTING SOFFIT TO REMAIN PROTECT DURING CONSTRUCTION.
- EXISTING DOOR FRAME SYSTEM TO REMAIN PROTECT DURING CONSTRUCTION.
- EXISTING DOOR AND WINDOW FRAME SYSTEM TO REMAIN -PROTECT DURING CONSTRUCTION. 4. EXISTING WINDOW FRAME TO REMAIN - PROTECT DURING
- CONSTRUCTION. 5. EXISTING HEADER CONSTRUCTION TO REMAIN - PROTECT
- DURING CONSTRUCTION. EXISTING GYPSUM CEILING AND ASSOCIATED CEILING EQUIPMENT (LIGHTING AND SPEAKER) TO REMAIN .
- PROTECT DURING CONSTRUCTION. EXISTING SAT CEILING AND ASSOCIATED CEILING EQUIPMENT (LIGHTING AND SPEAKER) TO REMAIN . PROTECT DURING CONSTRUCTION.
- EXISTING DOOR AND WINDOW FRAME SYSTEM TO BE REMOVED IN ITS ENTIRETY
- EXISTING SAT CEILING TO BE REMOVED IN ITS ENTIRETY REMOVE ALL LIGHT FIXTURES AND DEVICES - REFER TO ELECTRICAL DRAWINGS.
- 10. EXISTING LIGHT FIXTURES TO REMAIN PROTECT DURING CONSTRUCTION - REFER TO ELECTRICAL DRAWINGS.
- EXISTING PENDANT LIGHT METAL BRACKETS TO REMAIN PROTECT DURING CONSTRUCTION - REFER TO ELECTRICAL DRAWINGS.
- 12. EXISTING ELECTRICAL EQUIPMENT TO BE REMOVED -REFER TO ELECTRICAL DRAWINGS FOR MORE INFORMATION.
- 13. EXISTING MECHANICAL EQUIPMENT TO BE REMOVED IN ITS ENTIRETY - REFER TO MECHANICAL DRAWINGS FOR MORE INFORMATION.
- 14. EXISTING MECHANICAL EQUIPMENT TO REMAIN PROTECT DURING CONSTRUCTION.
- 15. EXISTING CEMENT PLASTER CEILING AND ASSOCIATED CEILING LIGHTS TO REMAIN - PROTECT DURING CONSTRUCTION.
- 16. EXISTING HEADER CONSTRUCTION TO BE REMOVED. EXISTING CEILING SYSTEM TO REMAIN. REMOVE AND REPLACE CEILING SYSTEM AS REQUIRED TO PROVIDE STRUCTURAL, FIRE-PROTECTION, MECHANICAL ELECTRICAL, OR PLUMBING WORK INDICATED. FINISH OF REPAIR/ PATCH TO MATCH ADJACENT EXISTING SURFACE IN MATERIAL, COLOR AND TEXTURE.
- EXISTING EXTERIOR CANOPY TO REMAIN.
- 19. EXISTING CURTAIN TRACK AND CURTAIN TO BE REMOVED, STORE, AND PROTECT DURING CONSTRUCTION FOR
- 20. EXISTING ELECTRICAL EQUIPMENT PIPES TO REMAIN -PROTECT DURING CONSTRUCTION.

|EXISTING REFLECTED CEILING PLAN GENERAL NOTES

- IN WORK AREAS, ALL EXISTING CEILING SYSTEMS, LIGHTS, EQUIPMENT AND CEILING-MOUNTED SPEAKERS TO BE REMOVED IN THEIR ENTIRETY UNLESS NOTED OTHERWISE REFER TO MECHANICAL, ELECTRICAL, PLUMBING AND FIRE PROTECTION DRAWINGS.
- REFER TO SHEETS AT.IO AND MECHANICAL, ELECTRICAL AND FIRE PROTECTION DRAWINGS FOR SCOPE OF NEW
- REFER TO ELECTRICAL PLANS FOR ADDITIONAL CEILING MOUNTED DEVICES AND EQUIPMENT TO BE REMOVED.
- CONTRACTOR TO VERIFY ALL EXISTING CEILING HEIGHTS PRIOR TO BEGINNING WORK ON ANY CEILING SCHEDULED TO RECEIVE WORK.
- FIELD VERIFY ALL EXISTING CONDITIONS. IN THE EVENT THAT AN ITEM NOT SHOWN ON THE DRAWINGS CONFLICTS WITH WORK UNDER THIS CONTRACT, CONTACT THE ARCHITECT PRIOR TO REMOVAL OF THAT ITEM. ITEMS SHOWN ARE INDICATED TO GIVE A GENERAL SCOPE OF WORK. ANY ITEMS REQUIRING REMOVAL/DEMOLITION TO PROPERLY PERFORM CONTRACT WORK BUT NOT SPECIFICALLY SHOWN, SHALL BE REMOVED BY THE CONTRACTOR AT NO ADDITIONAL COST, PROVIDING THE CONDITION WAS VISIBLE DURING BIDDING.
- SHORE OR BRACE ALL EXISTING CONSTRUCTION AS REQUIRED TO PERFORM DEMOLITION WORK
- EACH CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CORING, CUTTING, PATCHING, INFILLING, REPAIRING, REFINISHING, AND REMOVAL/REPLACEMENT OF BUILDING CONSTRUCTION REQUIRED TO ACCOMMODATE THE INSTALLATION OR REMOVAL OF THEIR WORK. ALL PATCHING, REPAIRING, AND REFINISHING SHALL BE PERFORMED BY THOSE REGULARLY INVOLVED IN THAT TRADE AND SHALL MATCH THE ADJACENT CONSTRUCTION. PROTECT ALL EXISTING FINISHES, EQUIPMENT, AND
- ADJACENT WORK NOT SCHEDULED TO BE REMOVED FROM DAMAGE DURING CONSTRUCTION. ANY DAMAGED FINISHES, EQUIPMENT, OR ADJACENT SURFACES SHALL BE REPAIRED OR REPLACED BY CONTRACTOR AT NO ADDITIONAL COST TO OWNER.
- THE OWNER HAS FIRST RIGHT OF REFUSAL FOR ANY MATERIAL OR EQUIPMENT REMOVED.

LEGEND

2'X2' SUSPENDED ACOUSTICAL TILE CEILING TO BE REMOVED IN IT'S ENTIRETY. REMOVE ALL LIGHTS, LOUVERS, AND OTHER DEVICES - REFER TO MECHANICAL, ELECTRICAL, PLUMBING AND FIRE PROTECTION DRAWINGS.

> RECESSED CAN LIGHTS TO BE REMOVED -REFER TO ELECTRICAL DRAWINGS

ELECTRICAL EQUIPMENT (SPEAKERS) TO BE REMOVED, STORED, AND PROTECTED FOR RE-INSTALLATION - REFER TO ELECTRICAL DRAWINGS.

2' × 4' RECESSED LIGHT FIXTURE TO BE REMOYED - REFER TO ELECTRICAL DRAWINGS

SURFACE MOUNTED LIGHT FIXTURE TO BE REMOVED - REFER TO ELECTRICAL DRAWINGS

MECHANICAL SUPPLY DIFFUSER TO BE REMOVED - REFER TO MECHANICAL DRAWINGS

MECHANICAL RETURN DIFFUSER TO BE REMOVED - REFER TO MECHANICAL DRAWINGS

EXISTING CONSTRUCTION TO BE REMOVED


EXISTING CONSTRUCTION TO REMAIN

LEGEND

EXISTING RECESSED CAN LIGHTS TO REMAIN -REFER TO ELECTRICAL DRAWINGS

ELECTRICAL EQUIPMENT (SPEAKERS) TO REMAIN - REFER TO ELECTRICAL DRAWINGS.

EXISTING PENDANT LIGHT FIXTURE TO REMAIN -REFER TO ELECTRICAL DRAWINGS

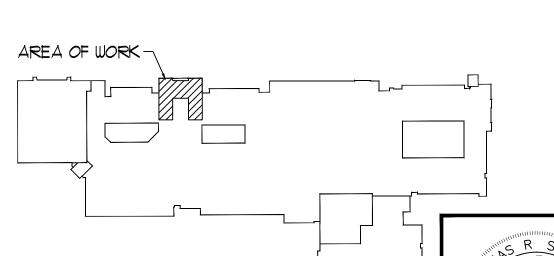

AR10800173 STATE OF KEY PLAN VDIANA CHITEC NOT TO SCALE

OAS, LLC

CORPORATION

CHOOL

S

0

20

DUNEL AND

46304

CHOOL ERTON,

Q D .

CHESTE MORGAN



