


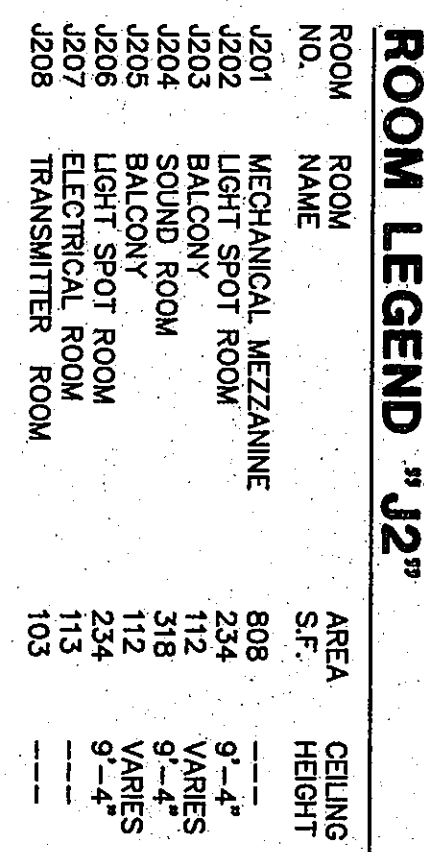

ROOM LEGEND "J2"

ROOM NO.	NAME	AREA S.F.	CEILING HEIGHT
J201	MECHANICAL MEZZANINE	808	9'-4"
J202	LIGHT SPOT ROOM	23.4	9'-4"
J203	BALCONY	112	VARIES
J204	SOUND ROOM	318	9'-4"
J205	BALCONY	112	VARIES
J206	LIGHT SPOT ROOM	23.4	9'-4"
J207	ELECTRICAL ROOM	113	11'
J208	TRANSMITTER ROOM	103	11'

PLAN NOTES:

- ① MOUNT LIGHT FIXTURE TYPE FR-4 AT 10'-0" ABOVE FINISH FLOOR. MOUNT LIGHT FIXTURE TYPE FR-4 MECHANICAL EQUIPMENT.
- ② MOUNT LIGHT FIXTURE TYPE FR-2 AT 9'-0" ABOVE FINISH FLOOR.
- ③ MOUNT FIVE LIGHT FIXTURES ON PROGRESSIVE WALL. THE FIRST AT 10'-0"-0" AFF, AND THE SECOND AT 10'-0" AFF, THE THIRD AT 10'-0" AFF, AND THE FIFTH AT 8'-0" AFF.
- ④ MOUNT LIGHT FIXTURE TYPE K-7 ABOVE GROUND IRON FLOOR. SEE DETAIL 7/E/7.
- ⑤ AUDITORIUM LIGHT FIXTURE PROVIDED BY SETTING MANUFACTURER. DIVISION 16 SHALL WIRE EACH ISLE LIGHT PER DETAIL 5/E/1.
- ⑥ DIMMERS IN THIS AREA SHALL HAVE BUILT IN RADIO FREQUENCY INTERFERENCE EQUAL TO IUTRON 200 WATT MODEL BDA-1-H20-COLOR BY ARCHITECT/ENGINEER. TRACK LIGHT FIXTURES SHALL BE PROVIDED WITH LOW NOISE DIMMERS.
- ⑦ MOUNT LIGHT FIXTURE TYPE Q-1, AND Q-2 PER AUDITORIUM SECTION. REFER TO DETAIL 7/E/1.
- ⑧ CYCLOGRAM. REFER TO DETAIL 6/E/17 FOR ADDITIONAL INFORMATION.
- ⑨ BORDERLIGHT. REFER TO DETAIL 4/E/17 FOR ADDITIONAL INFORMATION.
- ⑩ FRESNELS. REFER TO DETAIL 5/E/17 FOR ADDITIONAL INFORMATION.
- ⑪ ELIPSODIALS. REFER TO DETAIL 2/E/17 FOR ADDITIONAL INFORMATION.
- ⑫ LIGHT SWITCHES TO CONTROL ISLE LIGHTS. REFER TO SHEET EX-14 FOR ADDITIONAL ISLE LIGHTS.
- ⑬ CIRCUIT SHALL BE WIRED AND LABELED (ASCENDING) FROM LEFT TO RIGHT NEUTRAL PER CIRCUIT. PROVIDE 120V 15 AMP BREAKER AND 120V 15 AMP NEUTRAL PER CIRCUIT.
- ⑭ PROVIDE FOUR ELIPSODIALS WITH SIDE ARMS FOR VERTICAL TYPE MOUNTING. WIRE AND LABEL SIDE PLAY STRIPS ASCENDING FROM BOTTOM TO TOP.
- ⑮ ONE 9/0 GROUND FOR EVERY 5 CIRCUITS.
- ⑯ FIXTURE AND DIMMER MOUNTED DOWN BELOW IN SIDE PLAY ROOM.
- ⑰ FIXTURE TYPE M-8 WITH REACTOR HO BALLAST MOUNTED ABOVE LYN-IN CEILING AND CONTROLLED BY MOTION DETECTORS (WIRED IN PARALLEL) VIA CL-14 (BOTTOM OF FIXTURE). MOUNT LIGHT FIXTURE TYPE M-8 AT 25'-0" (BOTTOM OF FIXTURE) FROM FIRST FLOOR LEVEL.
- ⑱ MOTION DETECTORS AT THIS LOCATION SHALL BE A WATT STOPPER MODEL SEE-100X LIGHT SAVING CONTROLLER (1) TO 200 FOOTCANDIES (2) 100 FOOTCANDIES.
- ⑲ WIRE ALL FIXTURES PL LAMP BALLAST TO 200 FOOTCANDIES 2AH-12, AND GENERAL LIGHTING CIRCUITS (2AH-10, OR 2AH-12) VIA LIGHTING CONDUIT AS INDICATED.
- ⑳ REFER TO DETAIL 5/E/18 FOR WIRING REQUIREMENTS.

☐ ALL 2'x4' LIGHT FIXTURES SHALL BE PLAN TYPE F-3 UNLESS OTHERWISE NOTED.
☐ ALL 1'x4' LIGHT FIXTURES SHALL BE PLAN TYPE F-1 UNLESS OTHERWISE NOTED.
☐ ALL 2'x2' LIGHT FIXTURES SHALL BE PLAN TYPE F-22 UNLESS OTHERWISE NOTED.
☐ ALL RECESS CAN LIGHTS SHALL BE PLAN TYPE RD-1 UNLESS OTHERWISE NOTED.
☒ ALL EXIT SIGNS SHALL BE PLAN TYPE XB-1 UNLESS OTHERWISE NOTED.

LIGHTING PLAN - UNIT J2

SCALE 1/8" = 1'-0"

