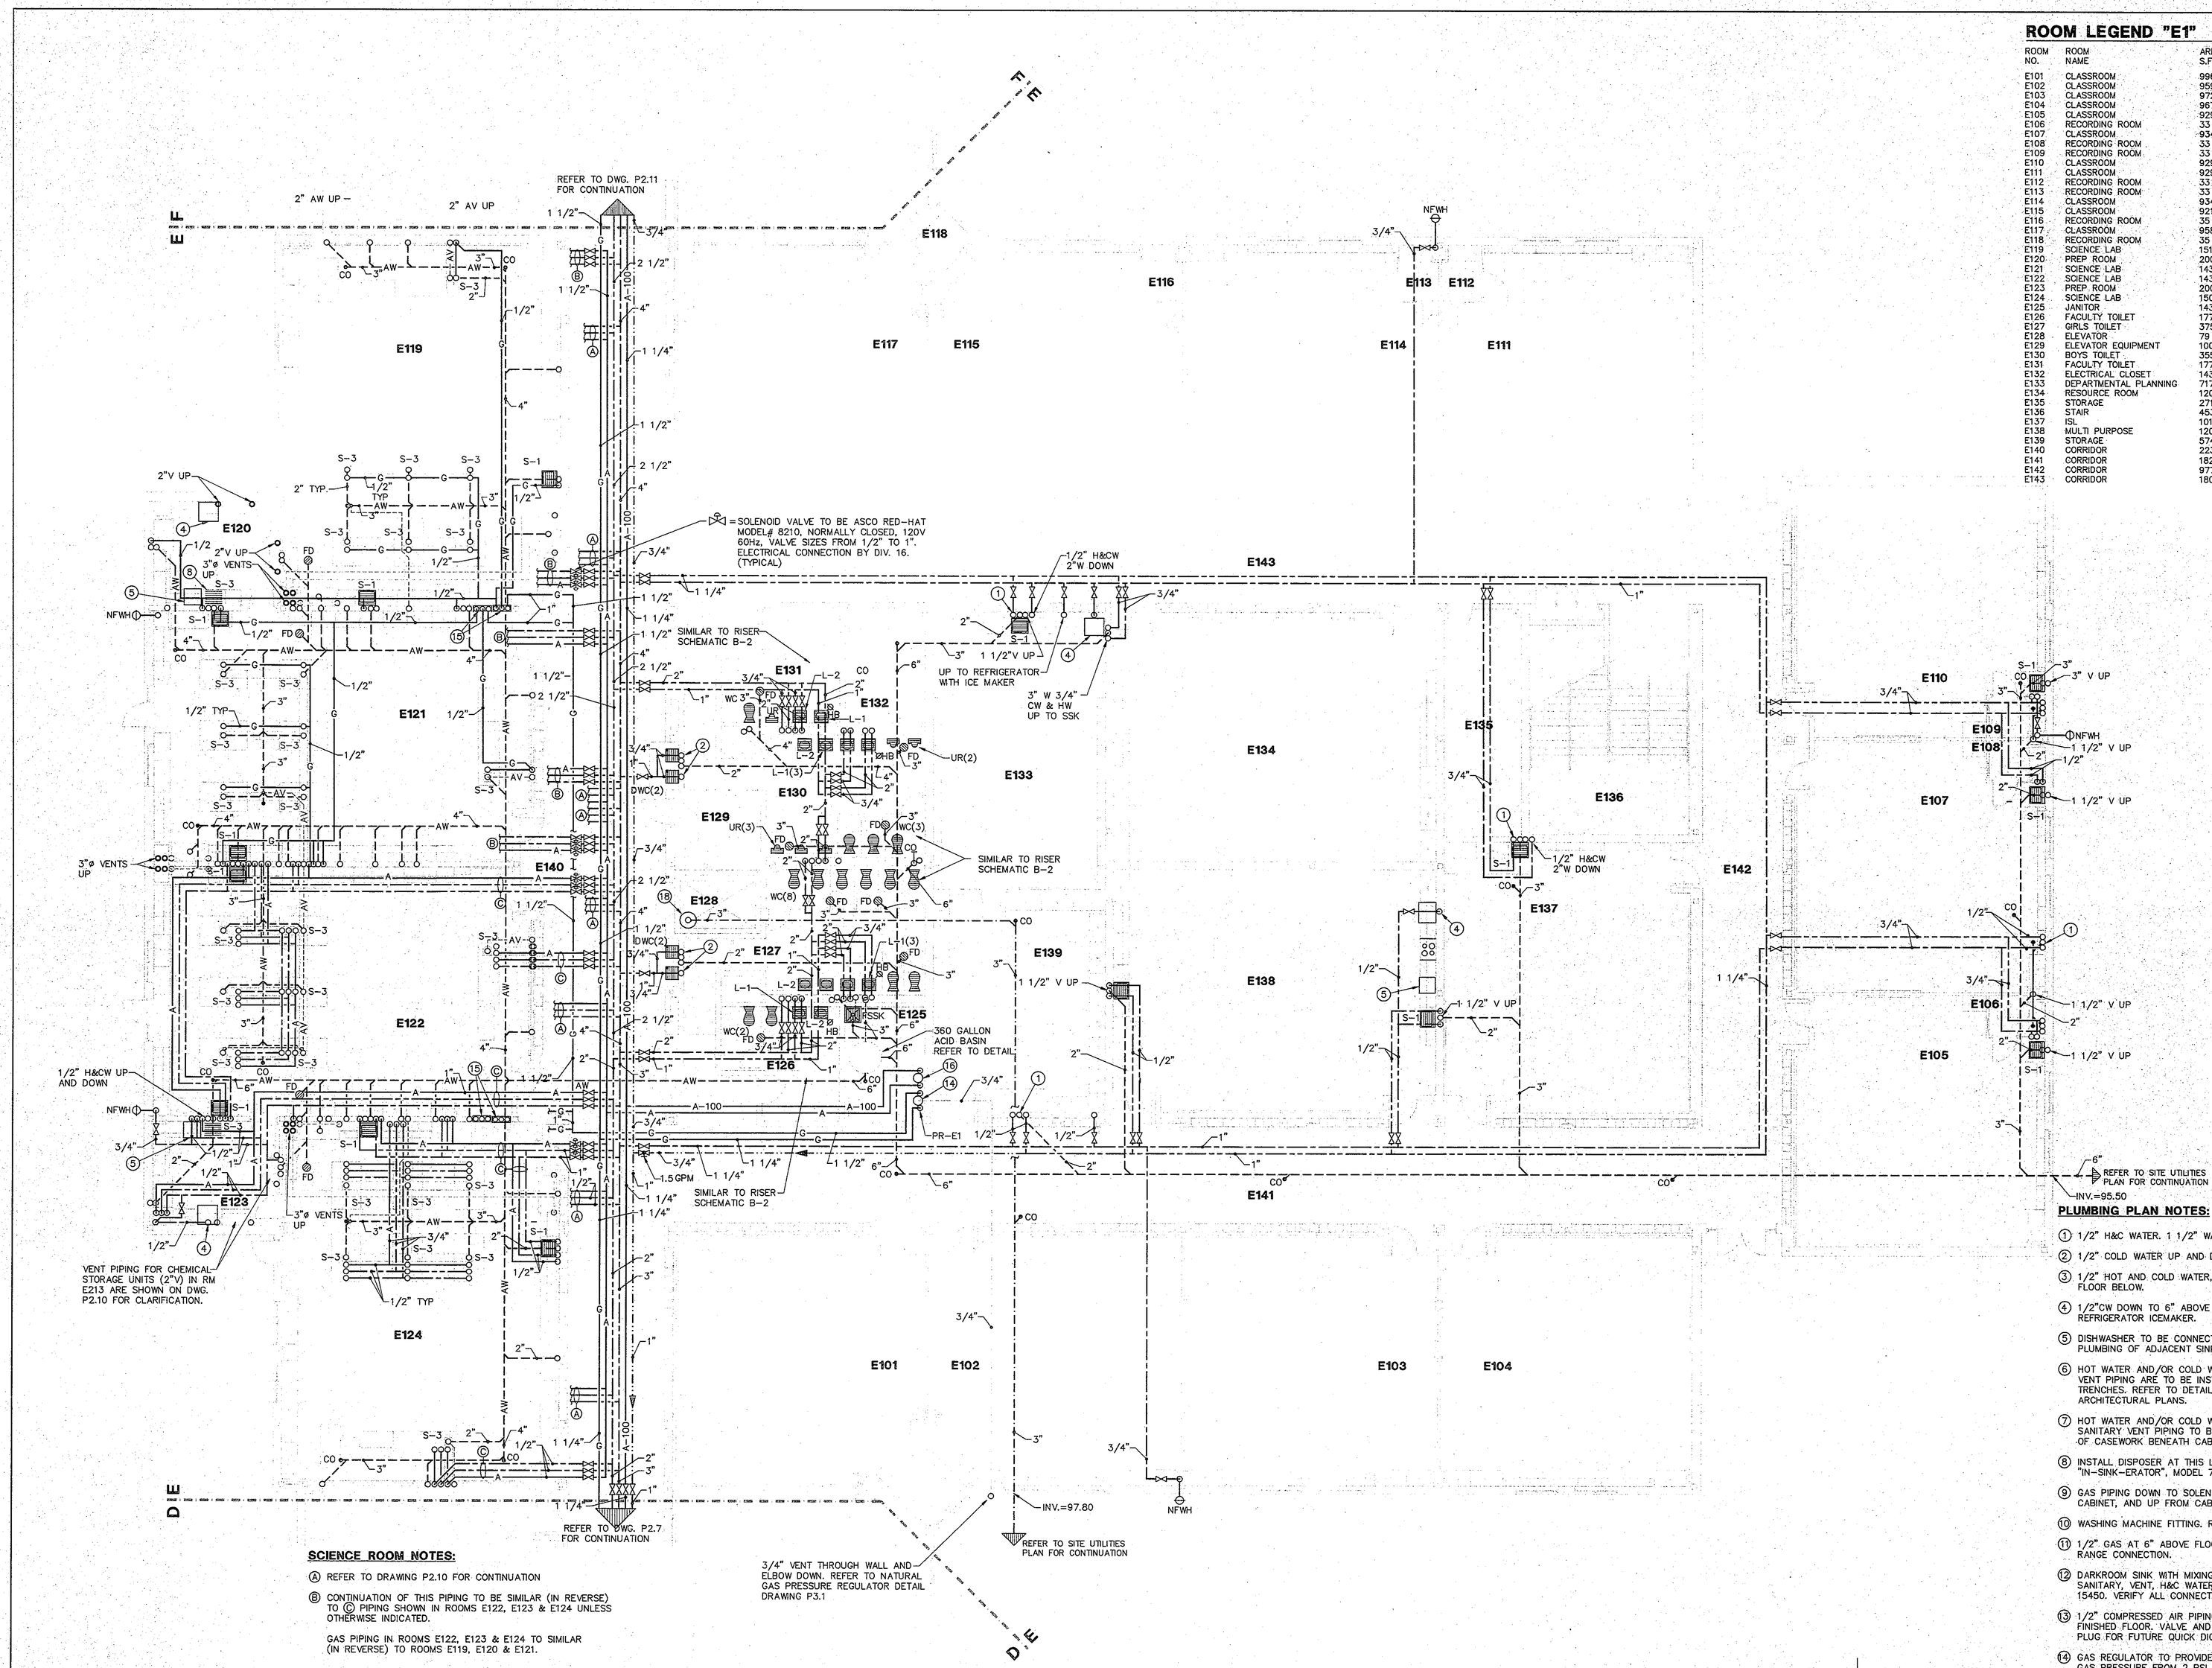

ROOM LEGEND "E1"

ROOM NO.	ROOM NAME	AREA S.F.	CEILING HEIGHT	
E101	CLASSROOM	996	11'-8"	ENGLISH
E102	CLASSROOM	959	VARIES	ENGLISH
E103	CLASSROOM	972	VARIES	ENGLISH
E104	CLASSROOM	967	VARIES	ENGLISH
E105	CLASSROOM	929	VARIES	FOR. LAN.
E106	RECORDING ROOM	33	9'-4"	9'-4"
E107	CLASSROOM	934	VARIES	FOR LAN
E108	RECORDING ROOM	33	9'-4"	9'-4"
E109	RECORDING ROOM	33	9'-4"	9'-4"
E110	CLASSROOM	929	VARIES	FOR LAN
E111	CLASSROOM	929	VARIES	FOR LAN
E112	RECORDING ROOM	33	9'-4"	9'-4"
E113	RECORDING ROOM	33	9'-4"	9'-4"
E114	CLASSROOM	934	VARIES	FOR LAN
E115	CLASSROOM	921	VARIES	FOR LAN
E116	RECORDING ROOM	35	9'-4"	9'-4"
E117	CLASSROOM	958	11'-8"	FOR LAN
E118	RECORDING ROOM	35	9'-4"	9'-4"
E119	SCIENCE LAB	1512	VARIES	BIO 1
E120	PREP ROOM	200	9'-4"	9'-4"
E121	SCIENCE LAB	1437	VARIES	BIO 1
E122	SCIENCE LAB	1437	VARIES	BIO 1
E123	PREP ROOM	200	9'-4"	9'-4"
E124	SCIENCE LAB	1508	VARIES	BIO1
E125	JANITOR	143	9'-4"	9'-4"
E126	FACULTY TOILET	177	9'-4"	9'-4"
E127	GIRLS TOILET	375	9'-4"	9'-4"
E128	ELEVATOR	79	9'-4"	9'-4"
E129	ELEVATOR EQUIPMENT	100	9'-4"	9'-4"
E130	BOYS TOILET	355	9'-4"	9'-4"
E131	FACULTY TOILET	177	9'-4"	9'-4"
E132	ELECTRICAL CLOSET	143	----	9'-4"
E133	DEPARTMENTAL PLANNING	717	9'-4"	FOR LAN
E134	RESOURCE ROOM	1203	VARIES	FOR LAN
E135	STORAGE	271	9'-4"	9'-4"
E136	STAIR	453	----	9'-4"
E137	ISL	1018	VARIES	9'-4"
E138	MULTI PURPOSE	1203	VARIES	FOR LAN
E139	STORAGE	574	9'-4"	9'-4"
E140	CORRIDOR	2238	10'-0"	9'-4"
E141	CORRIDOR	1826	10'-0"	9'-4"
E142	CORRIDOR	977	10'-0"	9'-4"
E143	CORRIDOR	1803	10'-0"	9'-4"

SCIENCE ROOM NOTES:

Ⓐ REFER TO DRAWING P2.10 FOR CONTINUATION

Ⓑ CONTINUATION OF THIS PIPING TO BE SIMILAR (IN REVERSE) TO Ⓒ PIPING SHOWN IN ROOMS E122, E123 & E124 UNLESS OTHERWISE INDICATED.

GAS PIPING IN ROOMS E122, E123 & E124 TO SIMILAR (IN REVERSE) TO ROOMS E119, E120 & E121.

PLUMBING PLAN NOTES:

1. 1/2" H&C WATER. 1 1/2" WASTE UP TO FIXTURE ABOVE
2. 1/2" COLD WATER UP AND DOWN TO DWC.
3. 1/2" HOT AND COLD WATER, 1 1/2" WASTE DOWN TO FLOOR BELOW.
4. 1/2"CW DOWN TO 6" ABOVE FLOOR. VALVE AND CAP FOR REFRIGERATOR ICEMAKER.
5. DISHWASHER TO BE CONNECTED TO WATER AND WASTE PLUMBING OF ADJACENT SINK.
6. HOT WATER AND/OR COLD WATER, GAS, AND SANITARY VENT PIPING ARE TO BE INSTALLED IN COVERED FLOOR TRENCHES. REFER TO DETAIL OF TRENCH INCLUDED ON ARCHITECTURAL PLANS.
7. HOT WATER AND/OR COLD WATER AND/OR GAS AND/OR SANITARY VENT PIPING TO BE INSTALLED IN BASE FRAMING OF CASEWORK BENEATH CABINETRY AND ABOVE FLOOR.
8. INSTALL DISPOSER AT THIS LOCATION. TO BE "IN-SINK-ERATOR", MODEL 77, 3/4 HP.
9. GAS PIPING DOWN TO SOLENOID VALVE WITHIN RECESSED CABINET, AND UP FROM CABINET. REFER TO DETAIL.
10. WASHING MACHINE FITTING. REFER TO DETAIL DWG. P3.1
11. 1/2" GAS AT 6" ABOVE FLOOR WITH STOP VALVE FOR RANGE CONNECTION.
12. DARKROOM SINK WITH MIXING FAUCET BY DIVISION 11470. SANITARY, VENT, H&C WATER CONNECTIONS BY DIVISION 15450. VERIFY ALL CONNECTIONS.
13. 1/2" COMPRESSED AIR PIPING DOWN TO 48" ABOVE FINISHED FLOOR, VALVE AND TEE WITH DIRT LEG, AND PLUG FOR FUTURE QUICK DICCONNECT BY OWNER
14. GAS REGULATOR TO PROVIDE 45 CU. FT. OF 7"WC NATURAL GAS PRESSURE FROM 2 PSI. REFER TO DETAIL DWG. P3.1
15. GAS VALVE CABINET REFER TO DETAIL DWG. P3.1
16. COMPRESSED AIR PRESSURE REGULATOR PIPING DETAIL REFER TO DETAIL DWG. P3.1
17. FLOOR DRAIN TO BE JOSAM 35233-2, WITH HINGED GRATE AND SEDIMENT BUCKET. TO BE INSTALLED W/ TRAP
18. SUMP PUMP TO BE LITTLE GIANT MODEL# 9E-CIA-RFS TO PUMP 30 GPM @ 20 FT. HD, 1/2 HP, 120V, COMPLETE WITH CHECK VALVE, UNION AND 24"ø BASIN
19. 1 1/2" OPEN SITE DRAIN: SEE DETAIL DWG. P3.1. LOCATE ABOVE CEILING TO ALLOW FOR MAINTENANCE ACCESS.

FLOOR PLAN UNIT "E"

1/8"=1'-0"

NORTH

COPYRIGHT 1997 BY FANNING/HOWEY ASSOCIATES, INC.

DOUGLAS M. WICKSTROM REGISTERED STATE OF INDIANA ARCHITECT

LEE BROCKSMITH REGISTERED STATE OF INDIANA ARCHITECT

THE NEW
CHESTERTON HIGH SCHOOL
FOR THE
DUNELAND SCHOOL CORPORATION
CHESTERTON, INDIANA

Fanning/Howey Associates, Inc.
Architects Engineers Consultants

PLUMBING PLAN UNIT "E"	REVISIONS NO. DATE
DRAWN BY: JJD	COMM. NO.: 95067.00
CHECKED BY: CAM	DATE: APRIL 21, 1997
P2.9	

CHESTERTON HIGH SCHOOL 95067.00